

# Mono Sink Mixer


## Installation and Maintenance Instructions

### REMOVING OLD TAPS OR MIXER

- 1 A spanner may be required. This can be purchased in store.
- 2 Ensure mains water supply is turned off at the stopcock or service valves.
- 3 After disconnecting the water supply, drain the pipework.
- 4 Unscrew the nuts connecting the water pipes to the fittings.
- 5 Save and inspect fibre washer for future use.
- 6 Unscrew backnuts and remove taps.

### FITTING YOUR NEW MIXER

- 1 Identify all components.

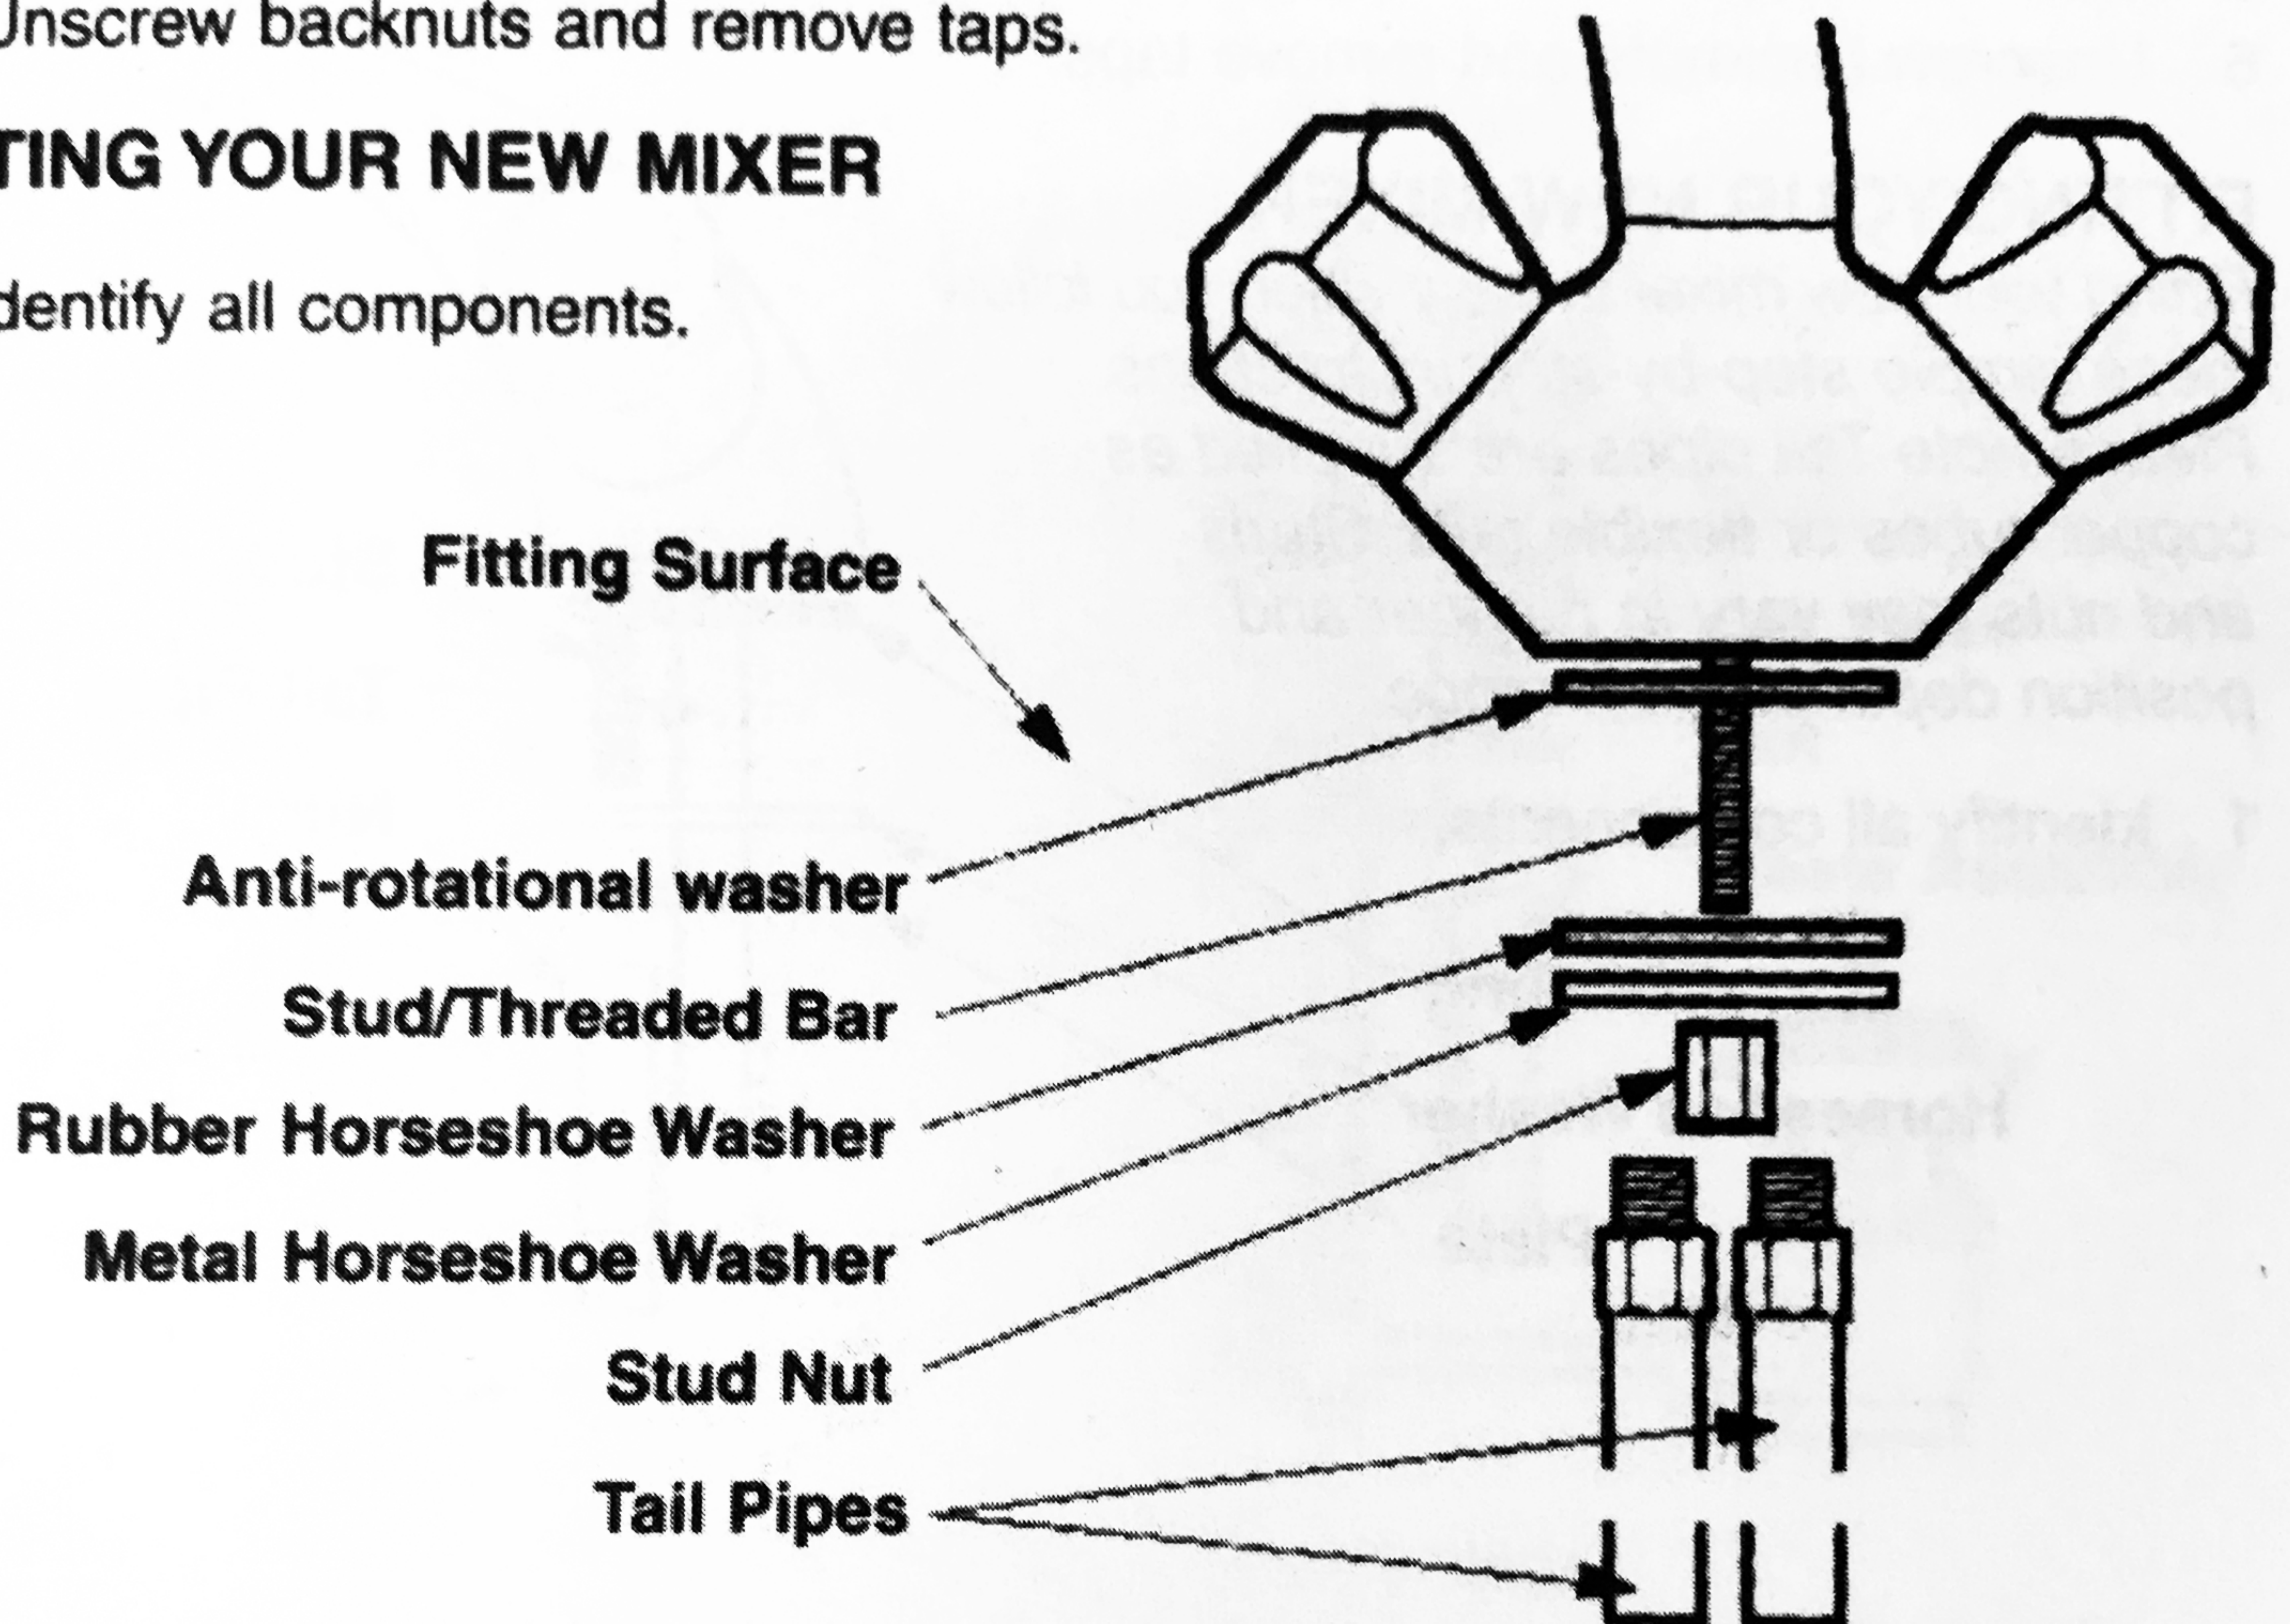

- 2 Prior to installation flush out pipework to remove debris.
- 3 Screw threaded bar into base of body
- 4 Place anti-rotational washer into groove at base of tap body and place the threaded bar through the sink unit.
- 5 Slide rubber horseshoe washer and metal horseshoe washer over threaded bar and fix unit in place using stud nut. Do not overtighten as it could damage the basin.
- 6 Connect the copper pipes to the base of tap body and re-connect the hot and cold water supply taps.

This product should be fitted in accordance with Water ByLaw Regulations  
Check valves should be fitted where necessary.

### AFTERCARE INSTRUCTIONS

Whilst modern plating techniques are used in the manufacture of this item, the surfaces will wear if cleaned incorrectly. Clean this product with a soft cloth and clean water. The use of any abrasive material will invalidate the guarantee.