

## Installation Instructions

First shut off your water heating system then, with your mains stop cock closed, open the lowest hot and cold taps in the house and allow to run until the cold storage tank and pipes are empty (the hot water storage cylinder always remains full).

Fitting isolating valves to the inlet feeds is recommended for ease of maintenance. **Remember to turn off the mains water supply before connecting to any existing pipe work.**

Fix the side valves to the basin, securing with the base rings from the top and the washers and backnuts from the bottom. Confirm that water exits on side valves are pointing to the center and fit the handles.

Screw the flexible hoses into the spout body, and fully hand tighten. Pass the body base ring and o-ring over the flexible hoses and stud to form a seal on sink top. Pass the tails and stud through the hole in the basin from above, and place the mixer in position on the basin.

Slide the washer and retaining plate up the tails and secure fixing the nut tight. Check that the body is correctly positioned and tighten fixing nut. The body needs to be fixed firmly but do not over tighten as damage may be cause to the sink.

### ATTENTION


Having first check all new connections, turn on the main stop cock, close all taps except the mixer and as system starts to refill check for leaks.

Once you have satisfied yourself that there are no leaks, switch on the water heating.

## Warranty

All Crosswater products come with a limited lifetime warranty. For full details, terms and conditions please contact Crosswater on: **0345 873 8840** or visit our web-site at [www.crosswater.co.uk](http://www.crosswater.co.uk)

The manufacturer reserves the right to make technical modifications without prior notice.

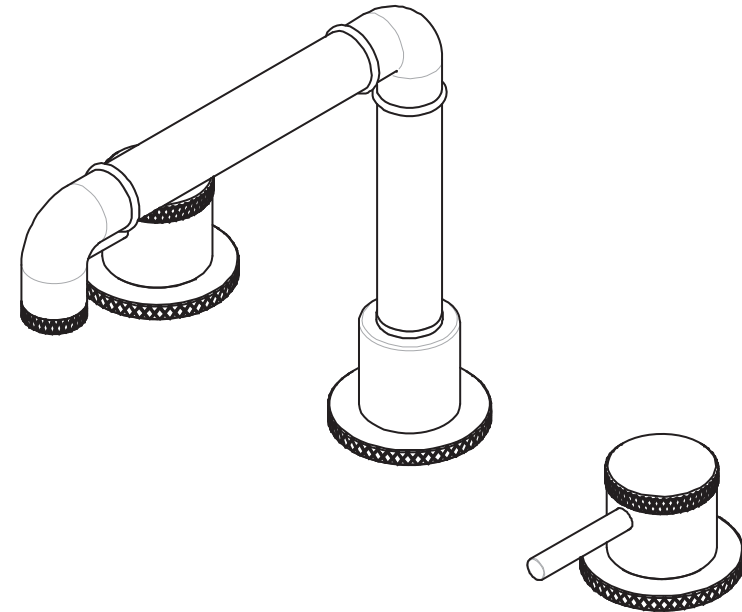

## Installation Instructions

# 3 Hole Deck Mounted Basin PRI135DNC/UB/M

## Introduction

**IMPORTANT:** Please read these instructions carefully before you begin and retain for future reference. These instructions have been prepared for your guidance, you must exercise due care at all times.

We do not accept responsibility for any problems that may occur through incorrect installation.

## Installation Notes

### General Installation Guide

This guide contains all the necessary fitting information for the tap. Please read all the instructions carefully before beginning the installation. Care taken during installation will ensure long life and trouble free operations from the tap.

Before installing the new mixer, it is essential that you thoroughly flush through the supply pipes in order to remove any remaining swarf, solder or other impurities. Failure to carry this simple procedure could cause problems or damage to the working of the mixer.

**NOTES:** The installation must comply with all plumbing codes including local codes and be installed by a licensed plumbing contractor. This product should only be fitted by a qualified plumber to NVQ (National Vocational Qualification) or SNVQ (Scottish National Vocational Qualification) Level 3. Should the installation be completed by a non-qualified person then the warranty may be considered invalid.

For further information or to find a qualified installer in your area please visit the Institute of Plumbers website - [www.iphe.org.uk](http://www.iphe.org.uk)

## Cleaning

The protective finish we use on our taps is very durable, nevertheless care should be taken when cleaning them.

They should be cleaned only with warm soapy water followed by rinsing with clean water and drying with a soft cloth. All finishes are vulnerable to acid attack and some strong substances such as household cleaners, disinfectants, denture cleaners, hair dyes can cause damage to the surface.

## Parts Supplied

