

INSTALLATION PROCEDURE

Please read the opposite page before continuing with the installation.

- 1) Remove the packaging taking special care with the doors and separate shelves. Before attaching the cabinet to the wall brackets it is necessary to attach the LED light fitting. The light fitting is secured to the top of the cabinet using the two screws supplied in the pre-drilled holes. Take care not to overtighten the screws. The light fitting power cable can then be inserted through the hole in the top of the cabinet.
- 2) It is now necessary to lower the internal cover, ensure the power is not connected! Remove the central screw in the front edge and lower the cover (If you have purchased a three door cabinet take the opportunity to lower both covers at this stage). Take care not to lose the screws.
- 3) Connect the light fitting power cable to the transformer output. The correct cable from the transformer is labelled and will have a corresponding plug. There will be a 'click' when the connection is made. Leave the cover down to adjust the wall brackets at a later stage.
- 4) Using a spirit level mark a horizontal line approximately 50mm below where the top of the cabinet (excluding light fitting) is to be. Position the bracket hole centres so that they are centred on the line, and ensure that the ends of the brackets are spaced to the width

between the inner edges of the vertical aluminium extrusions (see illustration). Mark off the holes using a pencil.


- 5) Drill the required holes and insert wall plugs. Note: Wall plugs supplied are only suitable for solid stone / brick walls. For plasterboard walls use specialist wall plugs, available from DIY or hardware stores. Seek advice from a specialist about the suitability of fixings to be used.
- 6) Screw the wall plates to the wall using the screws provided, please ensure the screws are fully tight but take care not to overtighten. Two screws must be used in each bracket.
- 7) This unit is provided with a supply cable already fitted. This cable should be fitted to the household lighting circuit or to a fused 3 AMP supply. Connections should be made in accordance with the latest IEE regulations. This cabinet is manufactured to CLASS 1 and requires an earth connection.
- 8) Hang the cabinet on the wall brackets, the claws on the cabinet brackets must be securely located on the wall brackets. Using a spirit level adjust the angle of the cabinet by turning the top screw with a cross head screwdriver. When the angle is properly adjusted, screw through the lower section of the cabinet backboard and mark the wall. Remove the cabinet from the wall, drill a suitable hole in the marked location and fit the

wall plug. Re-hang the cabinet making sure to tightening screw B on both hangers and secure the base of the cabinet to the wall with the supplied screw and cover-cap. The cabinet should not be left unattended until it is fully secure.


- 9) When the cabinet is fully secure the internal top cover(s) should be closed and secured with the small screw(s) removed earlier. When the cover is closed and secure restore the mains power and test the function of the LED light fitting and the shaver socket. If the light fails to function properly it is likely the IR sensor had been positioned too close to an adjacent wall or reflective surface.
- 10) Fit the glass shelves. Insert the shelf supports in the desired positions starting with the top shelf. Please be sure to adequately tighten the plastic screw at the bottom of the shelf support to prevent the shelf being removed accidentally. For the Absolute (AS767AL) cabinet remove the centre door to insert the shelves. This is easily achieved by supporting the door and pulling the small lever at the rear of the hinge. When complete, the door should be re-fitted by clipping the hinges back into place. Blanking plugs supplied can be used to cover unused shelf holes.
- 11) Finally add the storage trays to the base of the cabinet. These are provided to store small loose items within the cabinet.

Please retain for future reference

REFINE
AS615ALS

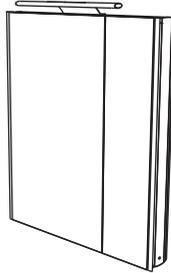


EQUINOX
AS515AL

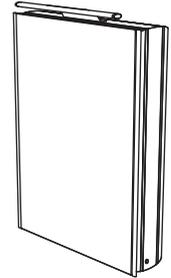

PINNACLE
AS615AL



ABSOLUTE
AS767AL

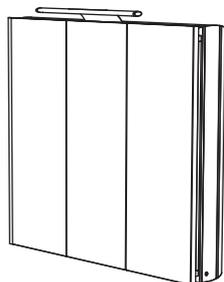

ELECTRICAL SAFETY INSTRUCTIONS (Applicable to UK Installations only)

All fittings must be installed by a competent person, in accordance with current IEE wiring regulations. If in doubt consult a qualified electrician.

IMPORTANT

Always switch off the electrical supply at the mains during installation and maintenance. It is recommended that the fuse is withdrawn or the circuit breaker is switched off for the necessary circuit before installation commences.


Fitting in Bathrooms is subject to the appropriate zone in accordance with IEE Regulations. This product is suitable for outside zones. It IS NOT suitable for installation in Zone 0 and Zone 1. It is also not suitable for installation in saunas, steam rooms or shower cubicles. This product is only suitable for permanent installation. DO NOT connect to a trailing plug and socket outlet. This product is only suitable for indoor use. DO NOT attach the product to surfaces that are damp or otherwise electrically conductive.

INSTALLATION CARE & SAFETY

Wear suitable eye protection when drilling. Take care when using power tools near water - the use of a residual current device (RCD) is advised. Beware of hidden cables or pipes. Take care if drilling on tiled surfaces in case the drill slips. A piece of masking tape applied to the wall before marking out the fixing holes will stop the drill from wandering.

IMPORTANT

The product must be installed with a minimum distance of 150mm between the infrared sensor and an adjacent wall or obstruction to ensure correct function of the sensor (see diagram below).

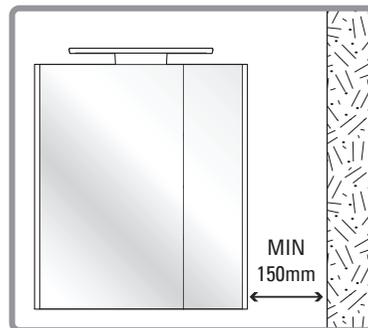

DO NOT strike glass components with hard or pointed items. DO NOT place very hot or very cold items against or in close proximity to glass surfaces unless an adequately thick insulation material is used to prevent such items coming in contact with the glass.

The nominal thickness of the mirror glass used in this product is 6mm and is film backed for safety. If the glass becomes chipped or broken replace immediately. For replacement glass and other components contact customer services at the address below.

CLEANING

It is recommended that the unit is cleaned with a soft, dry, non abrasive cloth when turned off. Never use cleaning agents or abrasive materials on any type of surface finish. Do not allow moisture to come into contact with the electrical components.

COMPLIANCE

This product complies with the following Electrical Safety Standards: BS EN 60825-1: 1994 inc. Amd 1: 1996, Amd 2 1997 & Amd 3: 2002 & Corrigendum 1 (Class 1 LED products) BS EN 60598-1: 2004, EN 60598-2-1: 1989, BS EN 60598-2-2: 1997 & Amd 1.

WIRING

This product is manufactured to class I category and must have an earth connection. ⊕

COLOUR CODING:

- L - Live = Brown
- N - Neutral = Blue
- ⊕ - Earth = Green & Yellow

REPLACING LAMPS

It is not possible to replace individual LED bulbs. In the unlikely event that the LED light should fail please contact Roper Rhodes customer services for a replacement part using the contact details at the bottom of this page.

WARNING

Disconnect the unit from the mains power supply before attempting to replace the light fitting. Release the internal top cover by removing the small screws and disconnect the plug connected to the lamp. The lamp can be removed by unfastening the two screws securing it to the cabinet. Fix the new light in place using the same screws, feed the wire through the hole in the top of the cabinet and re-connect the plug. Please ensure the internal top cover is replaced and the securing screws fully tightened before restoring mains electricity and testing the light function.

