


INSTALLATION
INSTRUCTIONS

1 x CRONO
LED MIRROR
WITH INTEGRATED
DIGITAL CLOCK
IP44


CODE: SE30646C0

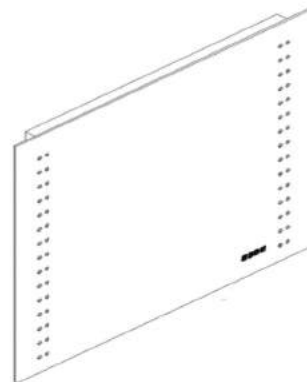


IMPORTANT: Please read these instructions before commencing installation and retain for future reference.

Components

Tools required



1 x LED mirror (screws and spacers attached)



1 x Instructions



1 x Pencil



1 x Screw driver

Important Safety Information

Please read these instructions carefully before attempting to install this product. It is advisable to keep these instructions in a safe place for future reference.

We recommend that you consult a qualified electrician. All electrical installation must be carried out in accordance with current IEE wiring regulations (BS7671).

These products must not be modified, if any modification are made, it may invalidate the warranty and may render the product unsafe.

This product should be used indoors.

- If in doubt installation must be carried out by a qualified electrician.
- Install on smooth flat surface(s) only.
- Do not exceed or stretch the cable length of each LED wire.
- There are 60 x 0.07W high power LED's in this mirror.
- (W)700mm x (H)600mm x (D)50mm.
- Please make sure the LED's are working correctly before commencing installation.

Safety Instructions

1. Before commencing installation or maintenance, isolate the main electrical supply for the appropriate circuit at the fuse board.
2. This product is only suitable for connecting to a 240V 50Hz supply.
3. The mirror should be mounted onto a secure surface.
4. When installing please take care to avoid water pipes, joints and electrical cables.


Waste Electrical & Electronic Equipment (WEEE)

The symbol on the product, or on the document accompanying the product, the crossed out wheellie bin symbol, indicates that this product may not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic waste.




RoHS
Compliant ✓




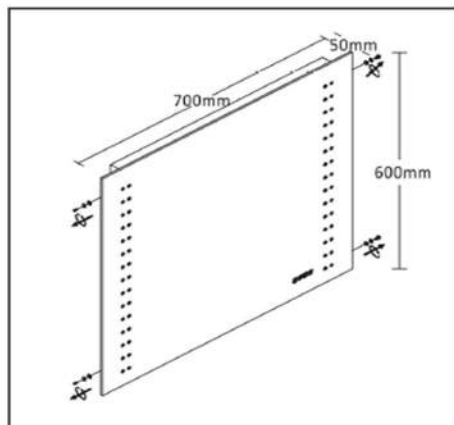

Lay the mirror on a flat surface with the front glass facing upwards. Using a Philips screwdriver, remove the four screws, along with the metal and white spacers on the sides of the mirror as shown above. Carefully lift the mirror off the back box and position it onto a soft flat surface to avoid scratching the mirror. Pierce the small protective IP rated rubber grommet (this will isolate and trap any steam to ensure maximum safety during use).

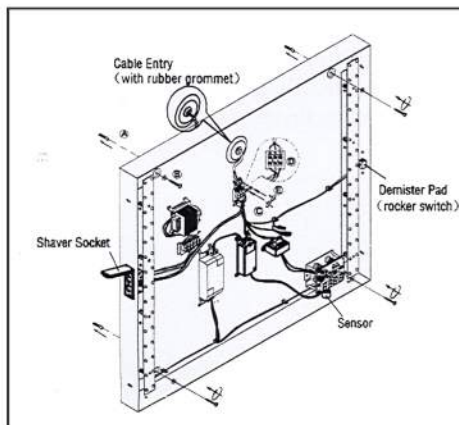

Insert a 3-core cable through the pierced hole in the protective cover, then thread the cable through from behind the back box into the power supply. Mark the position of the fixing holes in the metal back box onto the wall, carefully avoiding any wiring or water pipes. Next, drill and prepare the holes for the screws ensuring that the wall is a solid material. Mount the metal back box of the mirror onto the wall and secure tightly.

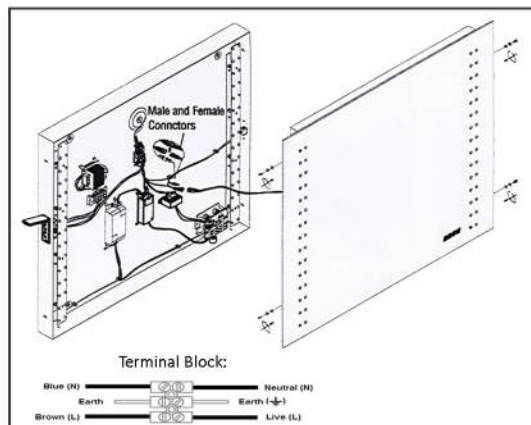

Using a flat-bed screwdriver, securely connect to the main supply using the terminal block (incoming Neutral blue/black) to Neutral blue and incoming Live (brown/red) to Live brown). For the demister pad, connect parts labelled 'male and female connectors' together. Attach the front glass panel safely onto the metal back box mounted on the wall. Secure tightly using the 4 screws and spacers. Switch on the mains electrical supply. To activate the LED's, swipe your hand over the sensor. To activate the demister pad, use the rocker switch.

Set the digital clock via the 3 buttons. **Step 1.** Press key MODE, the hour will flicker, then press UP or DOWN to choose the hour you want to set. **Step 2.** Press key MODE, the minute will flicker, then press UP or DOWN to choose the minute you want to set. **Step 3.** Finally press MODE key again.

ZONE

0

Inside the bath or shower.
Must be SELV (12V max.)
due to water submersion.
Minimum rating of IP67.


1

225cm above the bath or shower.
Minimum rating of IP44.

2

The area stretching to 60cm
outside the bath or shower and
60cm from water outlet of sink. An
IP rating of at least IP44 is required.

This mirror is IP44 rated and
is suitable for installation in
zone 2 and the outside
zones.

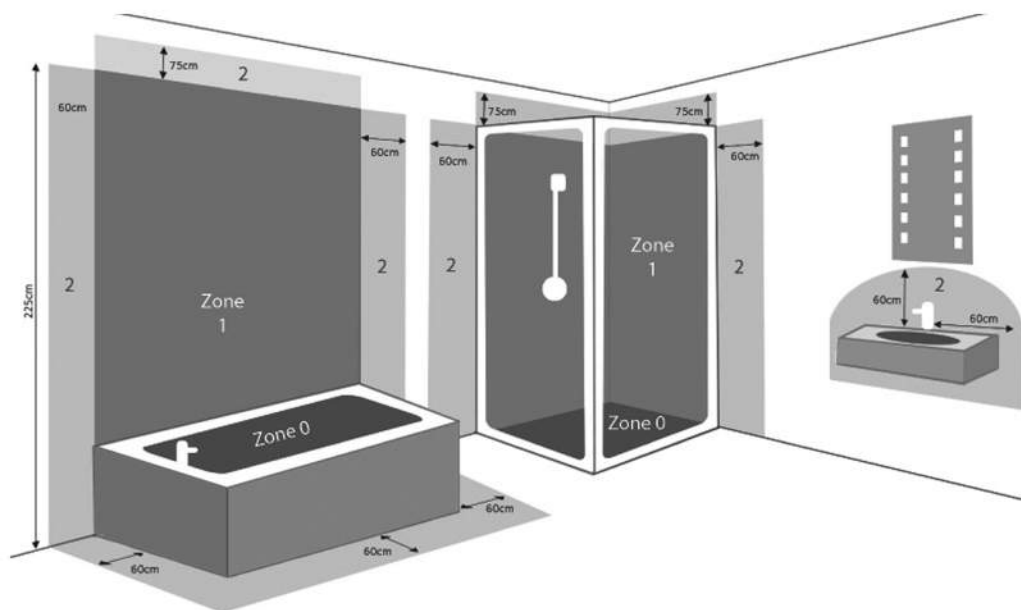

OUTSIDE ZONES. Anywhere outside zones 0, 1 & 2. Where water jets are not used for cleaning purposes, the general rules of BS7671 apply.

Maintenance & Care

- Ensure that the power is disconnected prior to cleaning.
- To keep the finish of this product, wipe over with a soft cloth periodically.
- Do not use harsh chemical solvents, this may dis-colour or damage the finish.