




## QUBIC 50, 60 & 80 CABINETS

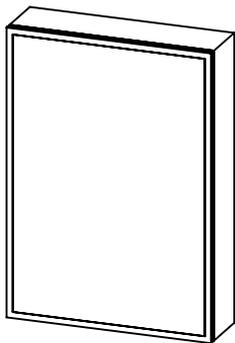

**Qubic 50:**  
Art No. 46400

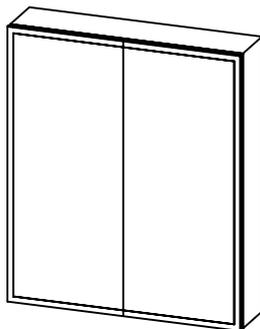

**Qubic 60:**  
Art No. 46500

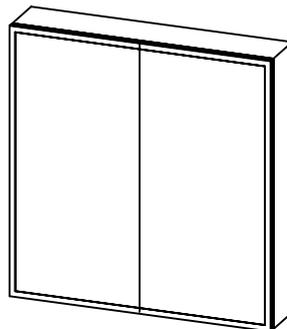

**Qubic 80:**  
Art No. 46600

### Thank you for purchasing this HiB product.


Please read through these instructions carefully and refer back to them during installation to ensure that your product is fitted safely and that it retains its high quality finish.


### Please retain this leaflet for future reference.

Before drilling, ensure there are no hidden cables or pipes in the wall.


**Please Note** You may need to remove the door / doors to aid installation. This can be done by unclipping the hinges. (There is a release catch at the back of the hinge). **DO NOT FIT SHELVES AT THIS STAGE.**

**Please Note** These products must be installed with a minimum distance of 150mm between the infra-red sensor switch and any surface or object to ensure correct operation of the sensor.




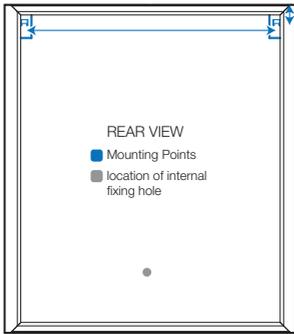

Fixing Preparation (Fig A)

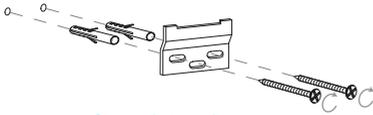

Fixing Brackets (Fig B)

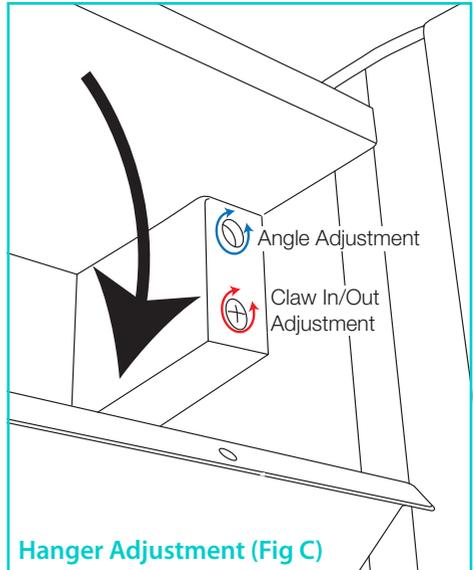


Hanger Adjustment (Fig C)

### Wall Hung Installation


1. Position the cabinet in a suitable location (according to the zonal diagram (Fig 1) on the back page) ensuring that the mains supply cable is within reach of the cable connection point of the cabinet. Carefully mark the desired position of the cabinet using a soft pencil, ensuring it is level.
2. Remove the cabinet from the wall and using a spirit level, mark a horizontal line below the pencil mark, taking into account the location of the mounting points (Fig. A). Place brackets on the line paying attention to the distance between the hangers on the cabinet. Carefully mark the position of the holes using a soft pencil. (Fig. B).
3. Before drilling, ensure there are no hidden cables or pipes behind the mounting point. Using a suitable drill bit, drill holes in the marked positions to a suitable depth.
4. Insert wall plugs level with the surface of the wall. If fitting to a tiled surface, wall plugs should be inserted below the tile surface to avoid cracking. *NB. For plasterboard walls, specialist fixings should be purchased from any DIY or hardware store.*
5. Fix the brackets to the wall using the screws provided.
6. Carefully remove the small screws along the top front edge of the cabinet to gain access to the internal panel(s). (Fig. C) Keep screws in a safe place.
7. Temporarily hang the cabinet ensuring the claws on the hangers are securely located on the wall brackets. Using a spirit level adjust the cabinet via the screws on the hangers. (Fig. C).
8. Mark the position of the internal fixing hole and remove the cabinet. Using a suitable drill bit, drill a hole and insert a wall plug as per stage 4 above.
9. Connect the cable at the rear of the cabinet to the mains supply cable using a suitable terminal block (not supplied) according to the wiring diagram (Fig. 2) on the back page.
10. Rehang the cabinet in position, tighten the screws on the hangers (Fig. C) and secure the base of the cabinet with the supplied screw and screw cap.

11. Once fully secure, close the internal panel(s) using the screws removed at stage 6.
12. Fit shelves in desired positions using metal shelf supports.
13. Reattach the door(s) ensuring the hinges fully locate and click back into position.
14. If necessary, the hinges can be adjusted in order to reposition the door(s) (Fig.D).
15. Switch the mains supply back on.



■ Move door(s) up/down



■ Move door(s) left/right



■ Move door away/towards the cabinet

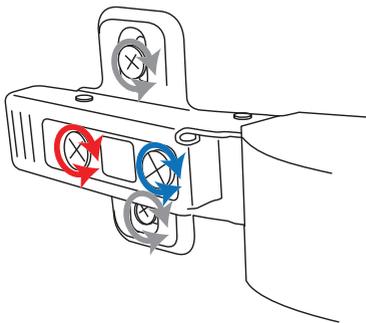


**Door Adjustment (Fig D)**

## Operating Instruction

This cabinet is fitted with colour temperature changing technology.


### To switch on/off

Slowly move your hand past the sensor.

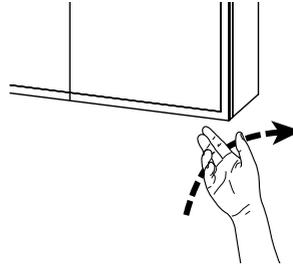

### To change the colour temperature

1. To alter the colour temperature of the cabinet, **hold** your hand underneath the sensor, the colour temperature will start to change.
2. Simply move your hand away from the sensor when the desired colour temperature has been reached and continue to operate the cabinet as normal - the chosen colour temperature will remain even after power is switched off and on again.

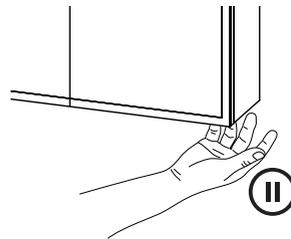


**Charger socket** is suitable for charging and powering electric razors, trimmers and toothbrushes.

*NB. On first use of the charger socket, inserting the plug may prove to be stiff. Reasonable force may be required to fully insert the plug. Make sure that the cabinet is held firmly so that it is not pushed off the wall. After a few uses, stiffness will ease and the socket will function as normal.*



**This product is suitable for installation in zones: 2 & Outside Zones (Fig 1)**

All installations must comply with guidelines which are based on a zonal concept. The diagram above illustrates this concept and must be followed to ensure the safe installation of electrical appliances in the bathroom. These regulations apply to domestic installations only. Installations must be made in accordance with the current IEE wiring regulations and relevant building regulations. **HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician.**

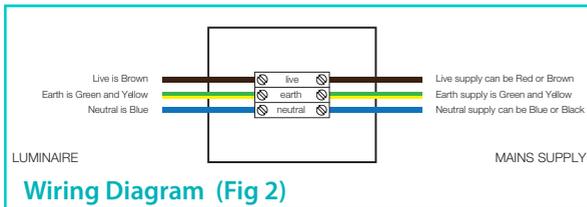

**WEEE compliance**

Must not be mixed with general household waste

**Electrical Safety Information**

HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician in accordance with current IEE regulations. Ensure mains power supply is switched off before starting installation. Before drilling, ensure there are no hidden cables or pipes in the wall.

**Care Instructions**

Do not use abrasives or solvents when cleaning this product.  
Wipe off all water spillages as soon as possible using a soft, damp cloth.

**Aftercare Service**

In the unlikely event that this product should fail please contact HiB customer services, contact detail shown below.

T: +44 (0)20 8441 0352 F: +44 (0)20 8441 0219 E: sales@hib.co.uk [hib.co.uk](http://hib.co.uk)  
 Building 3, North London Business Park, Oakleigh Road South, New Southgate, London. N11 1GN

©HiB Copyright: No part of this document may be reprinted or duplicated without HiB consent. All sizes and measurements are approximate, but we do try and make sure they are as accurate as possible. In the interest of continuous product development, HiB reserves the right to alter specifications as necessary. E & OE.