

Sololift2

Small lifting stations

60 Hz



1. Product overview	3	8. Further product information	32
Sololift2 for toilet applications	3	WebCAPS	32
Sololift2 for grey wastewater applications	3	WinCAPS	33
Applications	4	GO CAPS	34
Functions	4		
Marking and approvals	5		
2. Sololift2 WC-1	6		
Applications	6		
Features and benefits	6		
Sizing guide	6		
Construction features	7		
Installation requirements	8		
Product numbers	8		
Accessories	8		
Technical data	9		
3. Sololift2 WC-3	10		
Applications	10		
Features and benefits	10		
Sizing guide	10		
Construction features	11		
Installation requirements	12		
Product numbers	13		
Accessories	13		
Technical data	14		
4. Sololift2 CWC-3	15		
Applications	15		
Features and benefits	15		
Sizing guide	15		
Construction features	16		
Installation requirements	17		
Product numbers	17		
Accessories	17		
Technical data	18		
5. Sololift2 C-3	19		
Applications	19		
Features and benefits	19		
Sizing guide	20		
Construction features	21		
Installation requirements	22		
Product numbers	23		
Accessories	23		
Technical data	24		
6. Sololift2 D-2	25		
Applications	25		
Features and benefits	25		
Sizing guide	26		
Construction features	27		
Installation requirements	28		
Product numbers	28		
Accessories	28		
Technical data	29		
7. Product range, overview	30		
Product numbers	30		
Accessories	30		
Technical data	31		
Scope of delivery	31		

1. Product overview

Sololift2 for toilet applications

Sololift2 WC-1	Description	Technical data
	<p>Suitable for pumping wastewater from a toilet or washbasin.</p> <p>Features:</p> <ul style="list-style-type: none"> • Robust design for safe and trouble-free operation with high-performance pump and powerful cutter • ready to install • quick and easy installation • service-friendly design with dry motor unit • easy replacement using flexible connectors and adapters for discharge and inlets. 	<p>$H_{max.}$: 8.5 m. $Q_{max.}$: 137 l/min. Power consumption, P1: Max. 650 W. Discharge connection: $\varnothing 22/25/28/32/36/40$. Main inlet connection: $\varnothing 100$. Additional inlet connection at the top: 1 x $\varnothing 32/40$.</p>
TM05 0866 1711		
Sololift2 WC-3	Description	Technical data
	<p>Suitable for pumping wastewater from a toilet, washbasin, cabinet shower and a bidet or urinal.</p> <p>Features:</p> <ul style="list-style-type: none"> • Robust design for safe and trouble-free operation with high-performance pump and powerful cutter • ready to install • quick and easy installation • service-friendly design with dry motor unit • easy replacement using flexible connectors and adapters for discharge and inlets. 	<p>$H_{max.}$: 8.5 m. $Q_{max.}$: 137 l/min. Power consumption, P1: Max. 650 W. Discharge connection: $\varnothing 22/25/28/32/36/40$. Main inlet connection: $\varnothing 100$. Additional inlet connections - at the top: 1 x $\varnothing 32/40$ - on the left and right sides: 2 x $\varnothing 40/50$.</p>
TM04 9729 5010		
Sololift2 CWC-3	Description	Technical data
	<p>Suitable for pumping wastewater from a wall-hung toilet, washbasin, cabinet shower and a bidet or urinal.</p> <p>Features:</p> <ul style="list-style-type: none"> • Slim design for front-wall installation • robust design for safe and trouble-free operation with high-performance pump and powerful cutter • quick and easy installation • service-friendly design with dry motor unit • easy replacement using flexible connectors and adapters for discharge and inlets. 	<p>$H_{max.}$: 8.4 m. $Q_{max.}$: 142 l/min. Power consumption, P1: Max. 655 W. Discharge connection: $\varnothing 22/25/28/32/36/40$. Main inlet connection: $\varnothing 100$. Additional inlet connections - at the top: 1 x $\varnothing 32/40$ - on the left and right sides: 2 x $\varnothing 40/50$.</p>
TM04 9730 5010		

Sololift2 for grey wastewater applications

Sololift2 C-3	Description	Technical data
	<p>Suitable for pumping grey wastewater from a washing machine, dishwasher, bath tub, cabinet shower, washbasin or kitchen sink.</p> <p>Features:</p> <ul style="list-style-type: none"> • Slim design for front-wall installation • high-performance pump with 20 mm free passage for handling effluents up to 90 °C • ready to install • quick and easy installation • service-friendly design with dry motor unit • easy replacement using flexible connectors and adapters for discharge and inlets. 	<p>$H_{max.}$: 9 m. $Q_{max.}$: 178 l/min. Power consumption, P1: Max. 630 W. Discharge connection: $\varnothing 22/25/28/32/36/40$. Main inlet connection: $\varnothing 100$. Additional inlet connections - at the top: 1 x $\varnothing 32/40$ - on the left and right sides: 2 x $\varnothing 40/50$.</p>
TM04 9731 5010		
Sololift2 D-2	Description	Technical data
	<p>Extremely compact variant for pumping grey wastewater from a washbasin, cabinet shower or bidet.</p> <p>Features:</p> <ul style="list-style-type: none"> • Design for front-wall installation or installation in a cabinet • robust design for safe and trouble-free operation with high-performance pump with 10 mm free passage • ready to install • built-in non-return flap valve, venting valve with carbon filter and overflow protection • quick and easy installation • service-friendly design with dry motor unit. 	<p>$H_{max.}$: 5.7 m. $Q_{max.}$: 121 l/min. Power consumption, P1: Max. 290 W. Discharge connection: $\varnothing 22/32$. Additional inlet connections on the left and right sides: 2 x $\varnothing 40/50$.</p>
TM04 9732 5010		

Applications

For installations above sewer level, it is recommended to lead wastewater directly to the sewer by means of natural slope. In some cases, this is not possible or the cost of doing so bears no proportion to the benefit. Especially when it comes to renovation and modernisation, it may be difficult to establish a downward slope.

Any sanitary unit positioned below sewer level (backflow level) or far away from the main soil pipe can easily be drained by a Sololift2.

Sololift2 is suitable for pumping wastewater from places in private dwellings where it cannot be led directly to the main sewer by means of natural downward slope. The use of Sololift2 facilitates the installation of toilets, cabinet showers, washbasins or other facilities at basement, ground or loft level as it pumps the wastewater to the main soil pipe.

Sololift2 offers the opportunity of installing facilities such as cabinet showers and toilets at a distance from the main soil pipe without costly pipe installations.

Sololift2 can be used for the following:

- extra bathrooms in basements or attics
- basement installations of sanitary units below sewer level and also as excellent backflow protection from the main sewer
- low-cost bathrooms in holiday cottages
- added facilities in hotels and guest houses
- bathrooms for the elderly or the disabled
- renovation or modernisation of rest rooms in offices and other commercial buildings for a limited number of users.

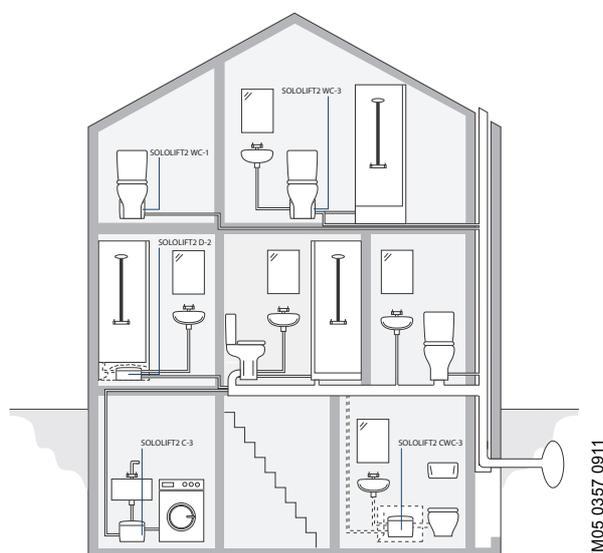


Fig. 1 Examples of application

Functions

Wastewater from the units connected is led to the Sololift2 lifting station. The pump starts automatically when the liquid level reaches the start level and stops when the level has fallen to the stop level. The start and stop levels depend on the type of Sololift2. See technical data of the individual types.

The tank of all Grundfos Sololift2 lifting stations is made of composite with an easy-to-clean surface and inside chamfers to minimise sedimentation.

Installed correctly, Sololift2 works automatically. For higher safety requirements, alarm devices are available. See section Accessories for the individual type.

The design offers unique features and is focused on quick installation as well as easy and clean service. The lifting stations require very little maintenance. We recommend to check the tank regularly, depending on application and how frequently it is used.

Grundfos' high quality requirements ensure high robustness and long and trouble-free operation. The production is inspected by an external institute according to EN 12050-2/-3.

The individual Sololift2 lifting stations are described on these pages:

Sololift2 WC-1, page 6.

Sololift2 WC-3, page 10.

Sololift2 CWC-3, page 15.

Sololift2 C-3, page 19.

Sololift2 D-2, page 25.



Fig. 2 Overview of Sololift2 lifting stations

Marking and approvals

Description

Sololift2 units are CE-marked and have obtained the following approvals:

- VDE
- TÜV/LGA.

Marking



Approvals



2. Sololift2 WC-1

Sololift2 WC-1 is a small, compact, ready-to-install automatic lifting station with integrated powerful cutter system. It is suitable for pumping wastewater with faeces from private dwellings.

The unit is designed according to EN 12050-3.



Fig. 3 Sololift2 WC-1

TM05 0866 1711

Applications

Sololift2 WC-1 is suitable for pumping wastewater from a washbasin and a single toilet (with horizontal outlet according to EN 33/37) containing toilet paper and faeces.

Typical applications:

- Basement installations below sewer level.
- In connection with the renovation or modernisation of existing buildings where the location may be remote from the main soil pipe so that a natural slope cannot be established, for example attics.



Fig. 4 Example of application

TM05 0358 0911

Features and benefits

Robustness and operational reliability

- The powerful motor ensures optimum operational reliability, even when for instance feminine hygiene products are occasionally flushed down the toilet.

Easy installation and replacement

- Adjustable discharge and inlet connections ensure easy installation and replacement.

Easy maintenance and service

- The removable, compact pump-motor unit makes any service job a fast and clean matter.
- No need to disconnect discharge and inlet pipes or to remove the unit from behind the toilet.

Sizing guide

The unit is designed for flush volumes between 4 and 9 litres.

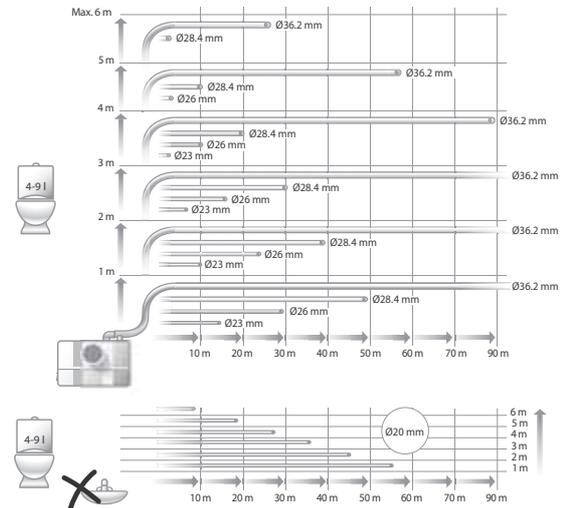
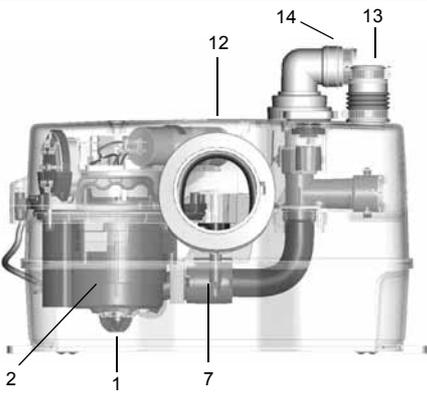
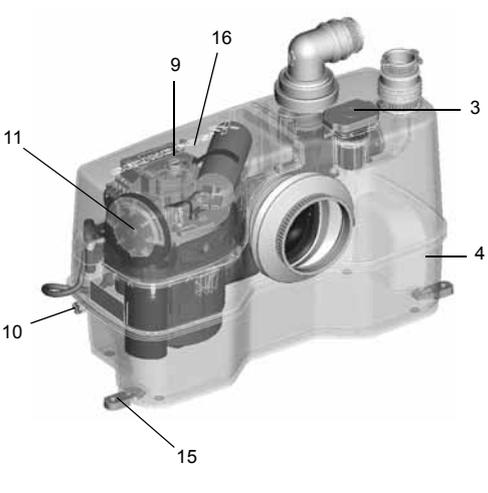
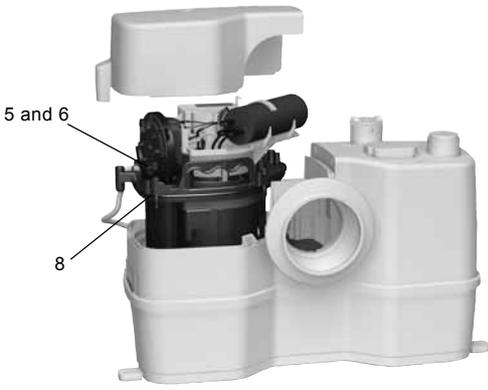


Fig. 5 Maximum lengths of vertical and horizontal discharge pipes

TM05 0360 0911

Figure 5 shows the maximum lengths of vertical and horizontal discharge pipes. The pipe length depends on the pipe diameter and is based on a flow velocity of 0.7 m/s. Four bends, a non-return valve and an isolating valve have already been taken into account.

Construction features

Sololift2 WC-1	Description
	<p>Pos. Operational reliability</p> <p>1 Cutter The powerful cutter's ability to easily handle feminine hygiene products or similar increases the reliability. The pump has self-venting valve for stable start.</p> <p>2 Motor The powerful high-torque motor features motor protection via a thermal switch and automatic restart. Three shaft seals and an additional V-ring ensure long operational life.</p> <p>3 Venting valve The venting valve has carbon filter and overflow protection. Possibility of connecting a vent pipe, for example over roof.</p> <p>4 Tank Welded tank design which is pressure-tight up to 2.5 m water column.</p>
	<p>Pos. Easy maintenance and service</p> <p>5 Access to components Design with dry motor for easy and clean service.</p> <p>6 Compact block unit Pump, motor and controller form a compact block unit which is easy to remove for service and replacement. No need to disconnect the Sololift2 tank and connected pipes when service is required.</p> <p>7 Auto coupling Self-adjusting auto coupling eases assembly.</p> <p>8 Screws All important screws are captive screws, which facilitates service work.</p> <p>9 Anti-blocking Manual anti-blocking function is accessible from outside with a screwdriver, i.e. no need to remove the cover. Remove a plug on top of the cover, insert the screwdriver, and turn the shaft.</p> <p>10 Drain connection Separate tank drain function is available by connecting a drain hose.</p> <p>11 Pressure switch Pressure switch control outside the tank, i.e. no moving parts and diaphragm in the wastewater.</p>
	<p>Pos. Easy installation and replacement</p> <p>12 Dimensions Very compact dimensions. The position of discharge and inlet connections ensures easy replacement of Sololift+ and similar units of other makes. No extra work on pipes required.</p> <p>13 Inlet Inlet connection at the top.</p> <p>14 Discharge A turnable 360 ° adapter incorporating a non-return valve enables vertical or horizontal discharge direction for easy replacement.</p> <p>15 Feet for floor-mounting Feet for floor-mounting are easy to install.</p> <p>16 Alarm Slot for an alarm device. Easy retrofitting just by pushing a small printed-circuit board with buzzer into the slot. No additional wires required.</p>

Installation requirements

This section shows an installation example and describes the installation requirements. Installation is done quickly and easily by using flexible hose connectors with several adapter options for almost any pipe diameter.

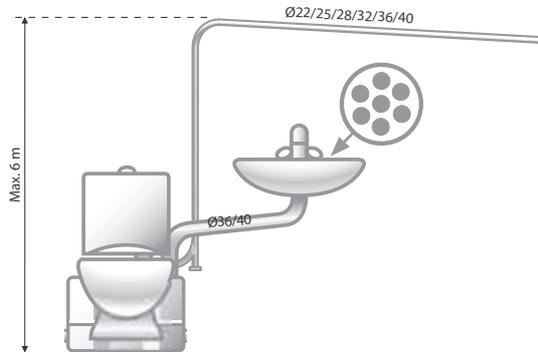


Fig. 6 Example of installation

Note: The first part of the discharge pipe should always be vertical. All horizontal pipes must have a fall of minimum 1 % to the main soil pipe.

The measurements in fig. 7 must be observed.

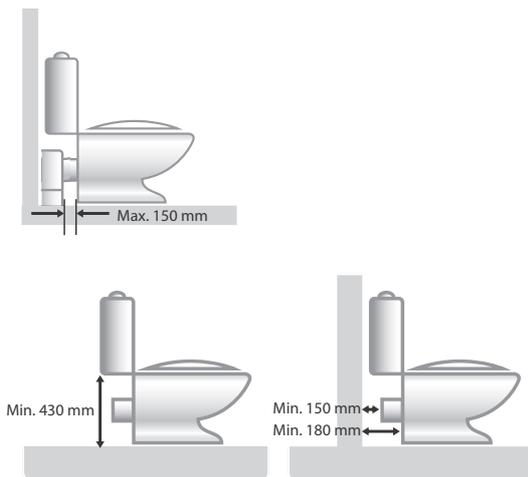


Fig. 7 Measurements to be observed

Sololift2 WC-1 must be installed directly behind the toilet and in the same room. When a connecting piece is required, the maximum distance to the toilet must not exceed 150 mm.

Observe the minimum height and distances in fig. 7 to ensure that the unit is accessible for service.

Connections



Fig. 8 Horizontal or vertical discharge

The turnable 360 ° discharge adapter can be fitted horizontally or vertically. The adapter incorporates a non-return valve.

The discharge and inlet connections can be adapted to the following pipe diameters:

Connection	Outer diameter					
	Ø22	Ø25	Ø28	Ø32	Ø40	Ø50
Discharge	•	•	•	•	•	-
Inlet at the top	-	-	-	•	•	-

Product numbers

Product	Plug	Sales region	Prod. no.
Sololift2 WC-1	No plug	Saudi Arabia	98622960

Accessories

Product	Description	Prod. no.
Alarm device	Acoustic alarm in case of malfunction. Printed-circuit board to be pushed into an internal slot in Sololift2 WC-1.	97772315
Replacement hose	Flexible PVC hose with two clamps and an adapter for the discharge of Sololift2. Dimensions: • Length: 500 mm. • Inner diameter: Ø32. • Outer diameter: Ø38.	97772316
Drain hose	Flexible PVC hose with two clamps and a plug. Applicable when the Sololift2 tank is to be drained for service. Dimensions: • Length: 500 mm. • Inner diameter: Ø12. • Outer diameter: Ø14.4.	97789093
Connecting pipe	Connecting pipe for toilet: 250 mm, DN 90 Connecting pipe for toilet: 160 mm, DN 90	98162129 98162133

Technical data

Mechanical data

Net weight	7.3 kg
Tank volume	9.0 litres
Flexible discharge elbow	Ø22/25/28/32/36/40
Toilet connection	Toilet with horizontal Ø100 outlet according to EN 33 / EN 37.
Dimensions of possible inlet	1 x Ø32/40
Start and stop levels	Start: 72 mm above floor level Stop: 52 mm above floor level
pH value of the pumped liquid	4-10
Maximum liquid temperature	50 °C
Ambient temperature	5-35 °C
Noise level	< 70 dB(A)
Duty class	S3-50 % - 1 min. (30 sec. on; 30 sec. off)

Electrical data

Supply voltage	1 x 220 V - 10 %/+ 6 %, 60 Hz
Power consumption, P1	Max. 650 W
Rated current	3.0 A
Power factor, cos φ	0.93
Speed	3400 min ⁻¹
Enclosure class	IP44
Insulation class	F
Connecting cable	1.2 m, 0.75 mm ² (H05VV-F-3G)

Dimensions

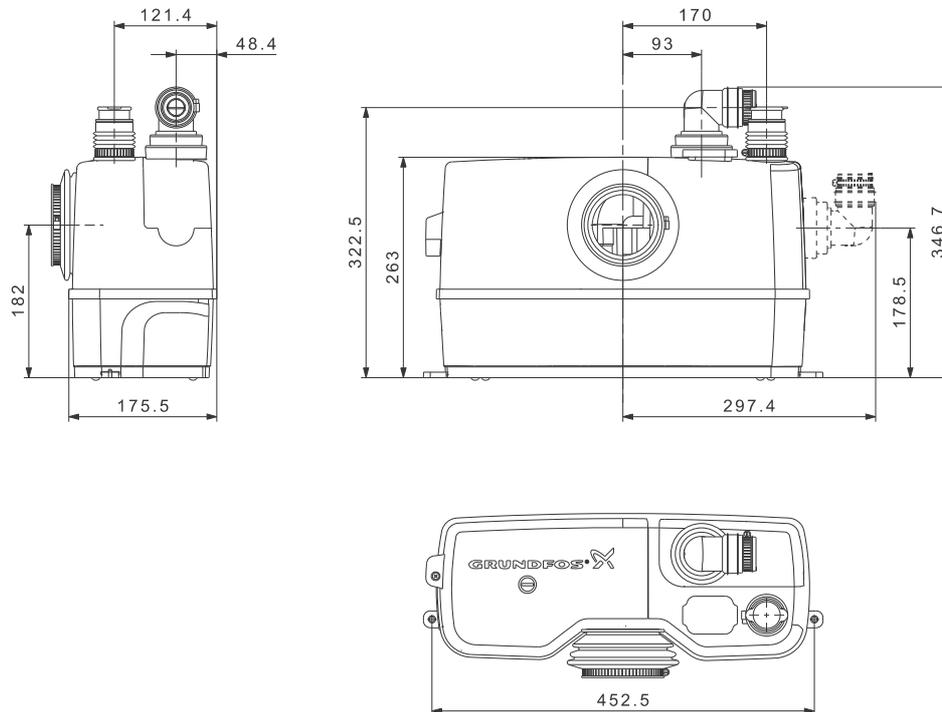


Fig. 10 Dimensional drawings, Sololift2 WC-1

Performance

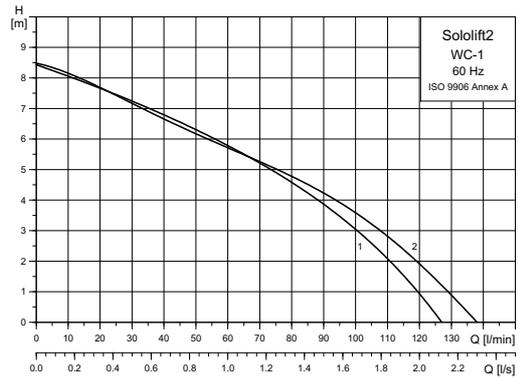


Fig. 9 Performance curves, Sololift2 WC-1

Legend

Pos.	Description
1	Horizontal outlet
2	Vertical outlet

TM06 1751 2714

TM06 1387 2314

3. Sololift2 WC-3

Sololift2 WC-3 is a small, compact, ready-to-install automatic lifting station with integrated powerful cutter system. It is suitable for pumping wastewater with faeces from private dwellings.

The unit is designed according to EN 12050-3.



TM04 9729 5010

Fig. 11 Sololift2 WC-3

Applications

Sololift2 WC-3 is suitable for pumping wastewater from a single toilet (with horizontal outlet according to EN 33/37) containing toilet paper and faeces, a washbasin, cabinet shower and a bidet or urinal.

Typical applications:

- Basement installations below sewer level.
- In connection with the renovation or modernisation of existing buildings where the location may be remote from the main soil pipe so that a natural slope cannot be established, for example attics.



TM05 0372 0911

Fig. 12 Example of application

Features and benefits

Robustness and operational reliability

- The powerful motor ensures optimum operational reliability, even when for instance feminine hygiene products are occasionally flushed down the toilet.

Easy installation and replacement


- Adjustable discharge and inlet connections ensure easy installation and replacement.

Easy maintenance and service

- The removable, compact pump-motor unit makes any service job a fast and clean matter.
- No need to disconnect discharge and inlet pipes or to remove the unit from behind the toilet.

Sizing guide

The unit is designed for flush volumes between 4 and 9 litres.



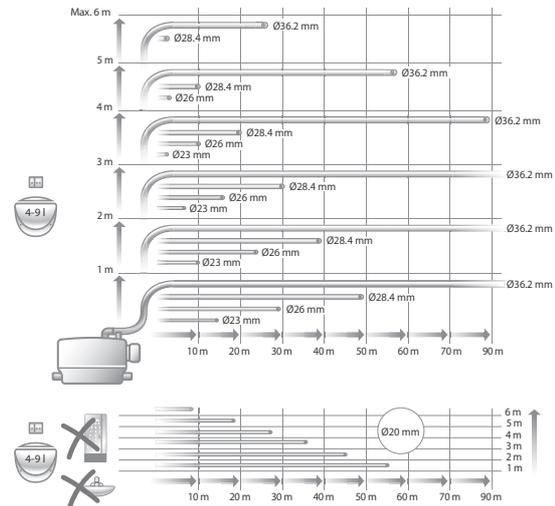


TM05 0374 0911

Fig. 13 Maximum lengths of vertical and horizontal discharge pipes

Figure 13 shows the maximum lengths of vertical and horizontal discharge pipes. The pipe length depends on the pipe diameter and is based on a flow velocity of 0.7 m/s. Four bends, a non-return valve and an isolating valve have already been taken into account.

Construction features

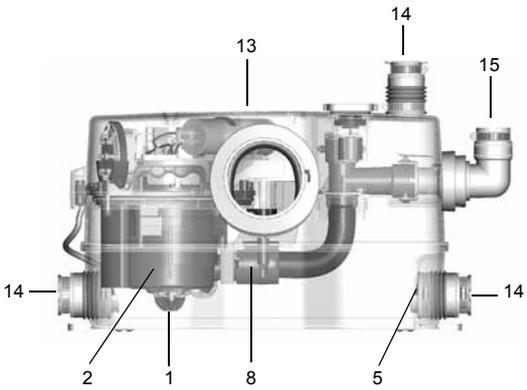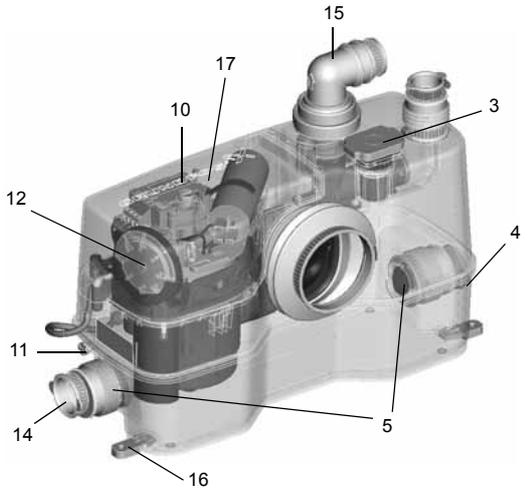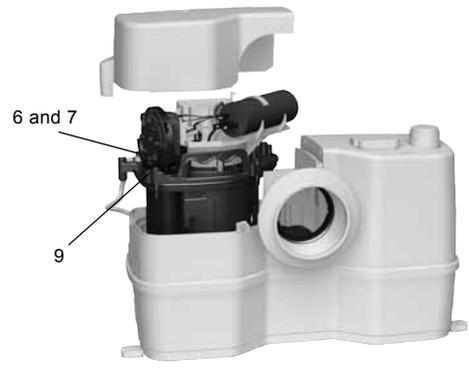Sololift2 WC-3	Description
	<p>Pos. Operational reliability</p> <p>1 Cutter The powerful cutter's ability to easily handle feminine hygiene products or similar increases the reliability. The pump has self-venting valve for stable start.</p> <p>2 Motor The powerful high-torque motor features motor protection via a thermal switch and automatic restart. Three shaft seals and an additional V-ring ensure long operational life.</p> <p>3 Venting valve The venting valve has carbon filter and overflow protection. Possibility of connecting a vent pipe, for example over roof.</p> <p>4 Tank Welded tank design which is pressure-tight up to 2.5 m water column.</p> <p>5 Non-return valves Non-return valves prevent back- and cross-flow to inlet pipes.</p>
	<p>Pos. Easy maintenance and service</p> <p>6 Access to components Design with dry motor for easy and clean service.</p> <p>7 Compact block unit Pump, motor and controller form a compact block unit which is easy to remove for service and replacement. No need to disconnect the Sololift2 tank and connected pipes when service is required.</p> <p>8 Auto coupling Self-adjusting auto coupling eases assembly.</p> <p>9 Screws All important screws are captive screws, which facilitates service work.</p> <p>10 Anti-blocking Manual anti-blocking function is accessible from outside with a screwdriver, i.e. no need to remove the cover. Remove a plug on top of the cover, insert the screwdriver, and turn the shaft.</p> <p>11 Drain connection Separate tank drain function is available by connecting a drain hose.</p> <p>12 Pressure switch Pressure switch control outside the tank, i.e. no moving parts and diaphragm in the wastewater.</p>
	<p>Pos. Easy installation and replacement</p> <p>13 Dimensions Very compact dimensions. The position of discharge and inlet connections ensures easy replacement of Sololift+ and similar units of other makes. No extra work on pipes required.</p> <p>14 Inlet Eccentric, height-adjustable connectors for side inlets, i.e. in addition to the inlet at the top of the tank.</p> <p>15 Discharge A turnable 360° adapter incorporating a non-return valve enables vertical or horizontal discharge direction for easy replacement.</p> <p>16 Feet for floor-mounting Feet for floor-mounting are easy to install.</p> <p>17 Alarm Slot for an alarm device. Easy retrofitting just by pushing a small printed-circuit board with buzzer into the slot. No additional wires required.</p>
	<p>TM05 0480 1111</p>
	<p>TM05 0507 1111</p>
	<p>TM05 0506 1111</p>
	

Installation requirements

This section shows an installation example and describes the installation requirements. Installation is done quickly and easily by using flexible hose connectors with several adapter options for almost any pipe diameter.

The start/stop levels are made for the modern flat shower trays.

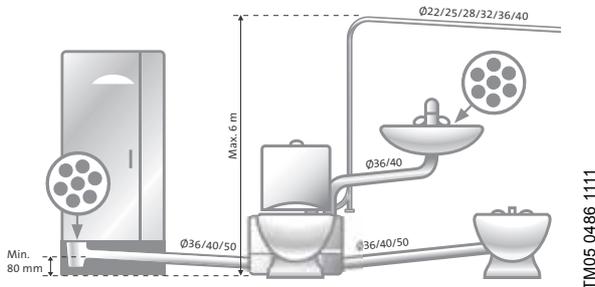


Fig. 14 Example of installation

Note: The first part of the discharge pipe should preferably be vertical. All horizontal pipes must have a fall of minimum 1 % to the main soil pipe. The distances in fig. 15 must be observed.

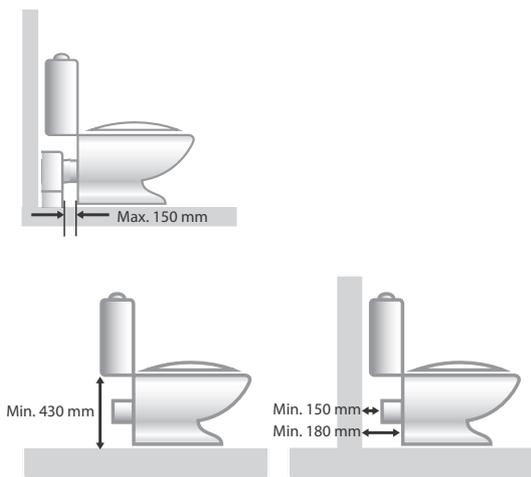


Fig. 15 Distances to be observed

Sololift2 WC-3 must be installed directly behind the toilet and in the same room. When a connecting piece is required, the maximum distance to the toilet must not exceed 150 mm.

Observe the minimum height and distances in fig. 15 to ensure that the unit is accessible for service.

Connections



Fig. 16 Horizontal or vertical discharge

The turnable 360 ° discharge adapter can be fitted horizontally or vertically. The adapter incorporates a non-return valve.

The discharge and inlet connections can be adapted to the following pipe diameters:

Connection	Outer diameter					
	Ø22	Ø25	Ø28	Ø32	Ø40	Ø50
Discharge	•	•	•	•	•	-
Inlet at the top	-	-	-	•	•	-
Inlet from side ¹⁾	-	-	-	-	•	•

¹⁾ One connector is included. Further connectors available as accessories.

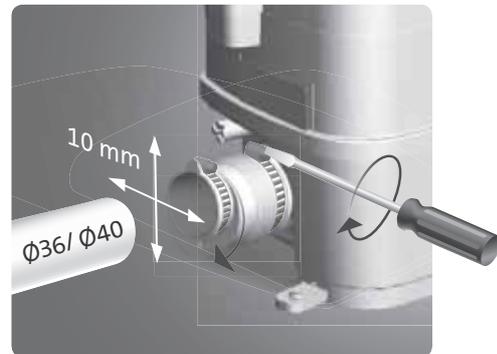




Fig. 17 Height and side alignment possible when using Ø40 inlet pipes

Product numbers

Product	Plug	Sales region	Prod. no.
Sololift2 WC-3	No plug	Saudi Arabia	98622986

Accessories

Product	Description	Prod. no.
Alarm device	Acoustic alarm in case of malfunction. Printed-circuit board to be pushed into an internal slot in Sololift2 WC-3.	97772315
	TM05 0367 0911	
Replacement hose	Flexible PVC hose with two clamps and an adapter for the discharge of Sololift2. Dimensions: • Length: 500 mm. • Inner diameter: Ø32. • Outer diameter: Ø38.	97772316
	TM05 0377 1111	
Drain hose	Flexible PVC hose with two clamps and a plug. Applicable when the Sololift2 tank is to be drained for service. Dimensions: • Length: 500 mm. • Inner diameter: Ø12. • Outer diameter: Ø14.4.	97789093
	TM05 0370 0911	
Adapter kit, inlet	Kit, second inlet Ø50/50/40	97775335
	TM05 0378 0911	
Connecting pipe	Connecting pipe for toilet: 250 mm, DN 90	98162129
	TM06 1041 1514	
	Connecting pipe for toilet: 160 mm, DN 90	98162133

Technical data

Mechanical data

Net weight	7.3 kg
Tank volume	9.0 litres
Flexible discharge elbow	Ø22/25/28/32/36/40
Toilet connection	Toilet with horizontal Ø100 outlet according to EN 33 / EN 37.
Dimensions of possible inlet	1 x Ø32/40 2 x Ø40/50 in the side
Start and stop levels	Start: 72 mm above floor level Stop: 52 mm above floor level
pH value of the pumped liquid	4-10
Maximum liquid temperature	50 °C
Ambient temperature	5-35 °C
Noise level	< 70 dB(A)
Duty class	S3-50 % - 1 min. (30 sec. on; 30 sec. off)

Electrical data

Supply voltage	1 x 220-240 V - 10 %/+ 6 %, 60 Hz
Power consumption, P1	Max. 650 W
Rated current	3.0 A
Power factor, cos φ	0.93
Speed	3400 min ⁻¹
Enclosure class	IP44
Insulation class	F
Connecting cable	1.2 m, 0.75 mm ² (H05VV-F-3G)

Dimensions

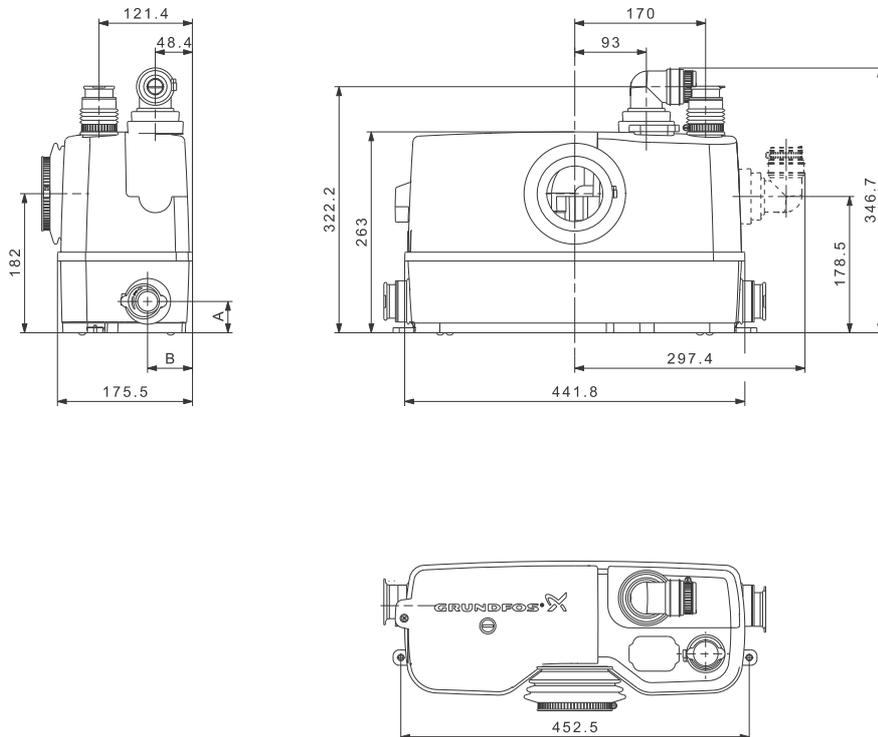


Fig. 19 Dimensional drawings, Sololift2 WC-3

Pipe diameter	Type	A [mm]		B [mm]	
		Min.	Max.	Min.	Max.
Ø36/40	Eccentric	36	46	53	63
Ø50	Centric	41		58	

Performance

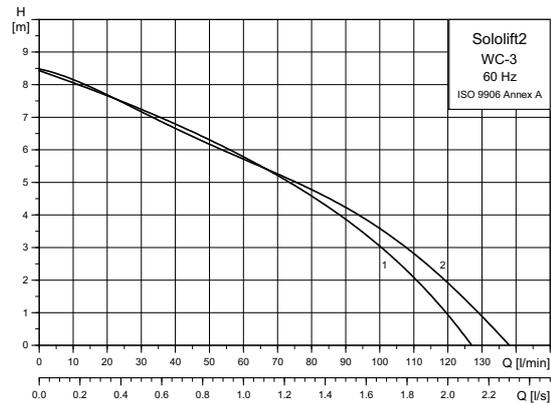


Fig. 18 Performance curves, Sololift2 WC-3

Legend

Pos.	Description
1	Horizontal outlet
2	Vertical outlet

TM06 1757 2714

TM06 1389 2314

4. Sololift2 CWC-3

Sololift2 CWC-3 is a slim, compact, ready-to-install automatic lifting station with integrated powerful cutter system. It is suitable for pumping wastewater with faeces from private dwellings.

The unit is designed according to EN 12050-3 and is specially designed for front-wall installations.



TM04 9730 5010

Fig. 20 Sololift2 CWC-3

Applications

Sololift2 CWC-3 is suitable for pumping wastewater from a single wall-hung toilet containing toilet paper and faeces, washbasin, cabinet shower and a bidet or urinal.

Typical applications:

- Basement installations below sewer level.
- In connection with the renovation or modernisation of existing buildings where the location may be remote from the main soil pipe so that a natural slope cannot be established, for example attics.



TM05 0381 0911

Fig. 21 Example of application

Features and benefits

Robustness and operational reliability

- The powerful motor ensures optimum operational reliability, even when for instance feminine hygiene products are occasionally flushed down the toilet.

Easy installation and replacement


- Adjustable discharge and inlet connections ensure easy installation and replacement.

Easy maintenance and service

- The removable, compact pump-motor unit makes any service job a fast and clean matter.
- No need to disconnect discharge and inlet pipes or to remove the unit from behind the toilet.

Sizing guide

The unit is designed for flush volumes between 4 and 9 litres.

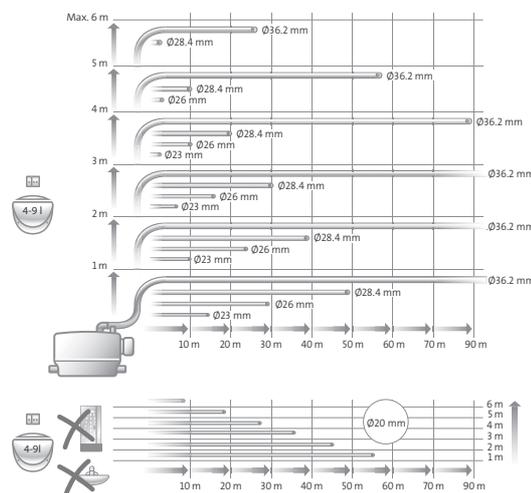




TM05 0383 0911

Fig. 22 Maximum lengths of vertical and horizontal discharge pipes

Figure 22 shows the maximum lengths of vertical and horizontal discharge pipes. The pipe length depends on the pipe diameter and is based on a flow velocity of 0.7 m/s. Four bends, a non-return valve and an isolating valve have already been taken into account.

Construction features

Sololift2 CWC-3

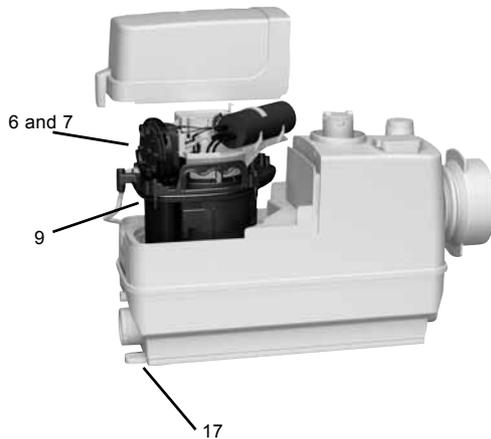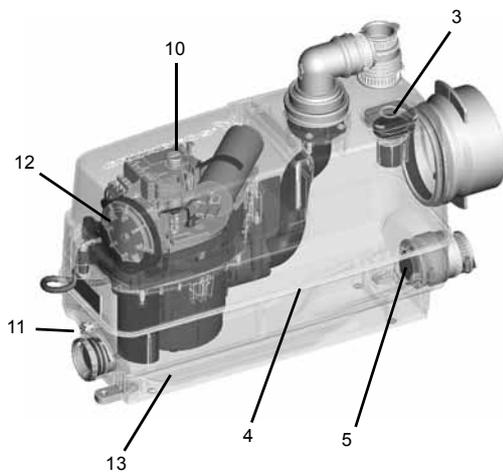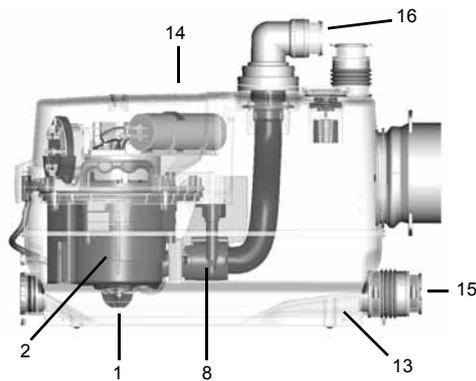

Description

Pos. Operational reliability

- | | |
|---|---|
| 1 | Cutter
The powerful cutter's ability to easily handle feminine hygiene products or similar increases the reliability. The pump has self-venting valve for stable start. |
| 2 | Motor
The powerful high-torque motor features motor protection via a thermal switch and automatic restart. Three shaft seals and an additional V-ring ensure long operational life. |
| 3 | Venting valve
Venting valve with carbon filter and overflow protection. Possibility of connecting a vent pipe, for example over roof. |
| 4 | Tank
Welded tank design which is pressure-tight up to 2.5 m water column. |
| 5 | Non-return valves
Non-return valves prevent back- and cross-flow to inlet pipes. |

TM05 0489 1111

Pos. Easy maintenance and service

- | | |
|----|---|
| 6 | Access to components
Design with dry motor for easy and clean service. |
| 7 | Compact block unit
Pump, motor and controller form a compact block unit which is easy to remove for service and replacement. No need to disconnect the Sololift2 tank and connected pipes when service is required. |
| 8 | Auto coupling
Self-adjusting auto coupling eases assembly. |
| 9 | Screws
All important screws are captive screws, which facilitates service work. |
| 10 | Anti-blocking
Manual anti-blocking function is accessible from outside with a screwdriver, i.e. no need to remove the cover. Remove a plug on top of the cover, insert the screwdriver, and turn the shaft. |
| 11 | Drain connection
Separate tank drain function is available by connecting a drain hose. |
| 12 | Pressure switch
Pressure switch control outside the tank, i.e. no moving parts and diaphragm in the wastewater. |
| 13 | Bottom
Bottom design with strong chamfer to prevent sedimentation in corners. |

TM05 0490 1111

Pos. Easy installation and replacement

- | | |
|----|--|
| 14 | Slim design
Slim design for front-wall installation with a wall-hung toilet. |
| 15 | Inlet
Eccentric, height-adjustable connectors for side inlets, i.e. in addition to the inlet at the top of the tank. |
| 16 | Discharge
Horizontal 360 ° turnable discharge incorporating a non-return valve. |

TM05 0855 1711

Installation requirements

This section shows an installation example and describes the installation requirements. Installation is done quickly and easily by using flexible hose connectors with several adapter options for almost any pipe diameter.

The start/stop levels are made for the modern flat shower trays.

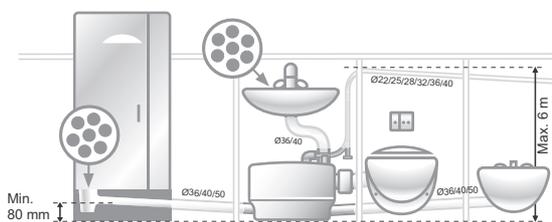


Fig. 23 Example of installation

Note: The first part of the discharge pipe should preferably be vertical. All horizontal pipes must have a fall of minimum 1 % to the main soil pipe.

The measurements in fig. 24 must be observed.

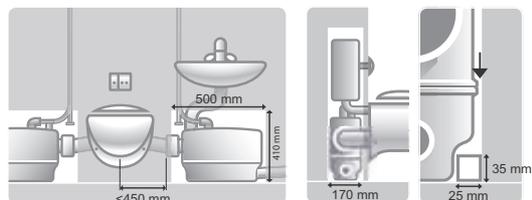


Fig. 24 Measurements to be observed

Sololift2 CWC-3 must be installed as close as possible (< 450 mm) to the wall-hung toilet in a front-wall installation or similar according to EN 12050-3.

Observe the minimum width of front wall and tile frame sizes in fig. 24 to ensure that the unit is accessible for service.

Connections

The turnable 360 ° discharge adapter can be fitted horizontally or vertically. The adapter incorporates a non-return valve.

The discharge and inlet connections can be adapted to the following pipe diameters:

Connection	Outer diameter					
	Ø22	Ø25	Ø28	Ø32	Ø40	Ø50
Discharge	•	•	•	•	•	-
Inlet at the top	-	-	-	-	•	-
Inlet from side ¹⁾	-	-	-	-	•	•

¹⁾ One connector is included. Further connectors available as accessories.

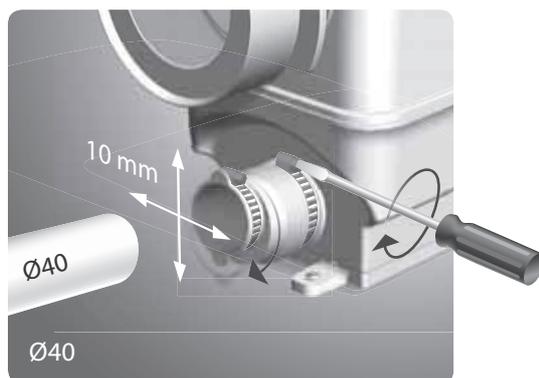


Fig. 25 Height and side alignment possible when using Ø40 inlet pipes

Product numbers

Product	Plug	Sales region	Prod. no.
Sololift2 CWC-3	No plug	Saudi Arabia	98622987

Accessories

Product	Description	Prod. no.
Alarm device	Acoustic alarm in case of malfunction. Printed-circuit board to be pushed into an internal slot in Sololift2 CWC-3.	97772315
Replacement hose	Flexible PVC hose with two clamps and an adapter for the discharge of Sololift2. Dimensions: • Length: 500 mm. • Inner diameter: Ø32. • Outer diameter: Ø38.	97772316
Adapter kit, inlet	Kit, second inlet Ø50/40/40	9775335

Technical data

Mechanical data

Net weight	7.1 kg
Tank volume	9.0 litres
Flexible discharge elbow	Ø22/25/28/32/36/40
Toilet connection	Toilet with horizontal Ø100 outlet according to EN 33 / EN 37.
Dimensions of possible inlet	1 x Ø32/40 on the top 2 x Ø40/50 in the side
Start and stop levels	Start: 72 mm above floor level Stop: 52 mm above floor level
pH value of the pumped liquid	4-10
Maximum liquid temperature	50 °C
Ambient temperature	5-35 °C
Noise level	< 70 dB(A) to 12050-2
Duty class	S3-50 % - 1 min. (30 sec. on; 30 sec. off)

Electrical data

Supply voltage	1 x 220 V - 10 %/+ 6 %, 60 Hz
Power consumption, P1	Max. 655 W
Rated current	3.0 A
Power factor, cos φ	0.93
Speed	3400 min ⁻¹
Enclosure class	IP44
Insulation class	F
Connecting cable	1.2 m, 0.75 mm ² (H05VV-F-3G)

Dimensions

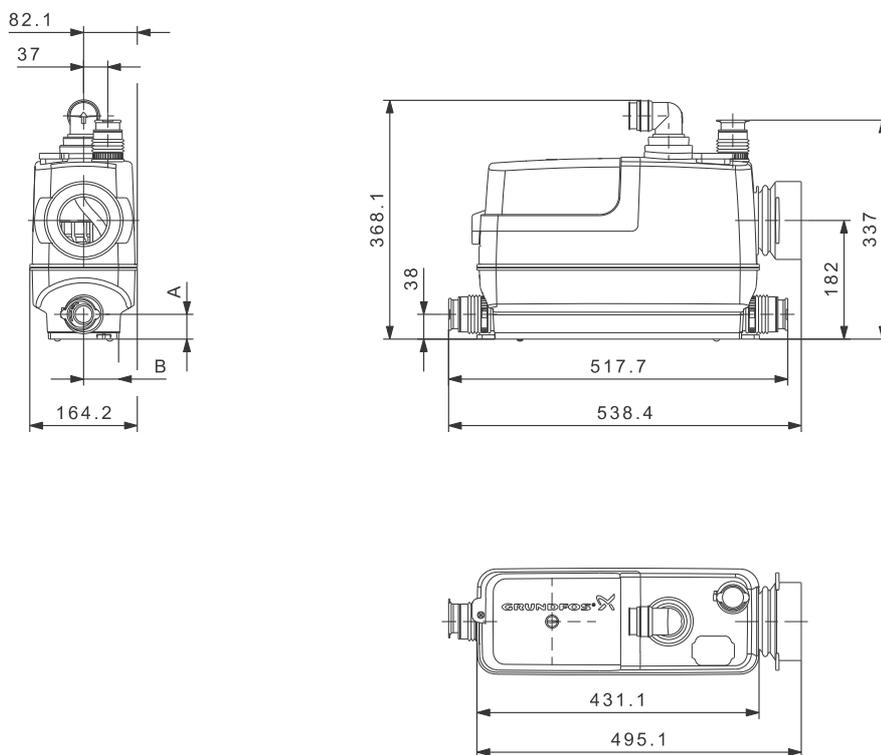


Fig. 27 Dimensional drawings, Sololift2 CWC-3

Pipe diameter	Type	A [mm]		B [mm]	
		Min.	Max.	Min.	Max.
Ø40	Eccentric	32	42	49	59
Ø50	Centric	37		54	

Performance

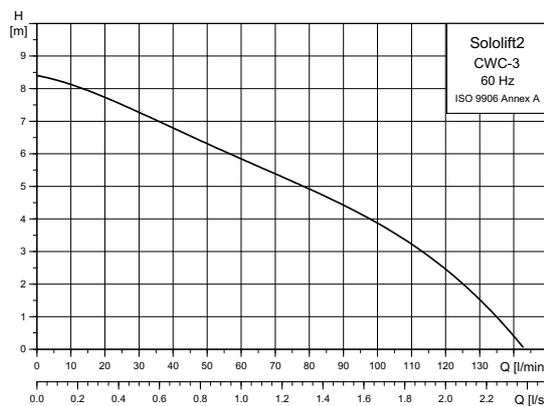


Fig. 26 Performance curves, Sololift2 CWC-3

TM06 1750 2714

TM06 1386 2314

5. Sololift2 C-3

Sololift2 C-3 is a small, compact, ready-to-install automatic lifting station. It is suitable for pumping grey wastewater without faeces from any kind of building. The unit is designed according to EN 12050-2.



TM04 9731 5010

Fig. 28 Sololift2 C-3

Applications

Sololift2 C-3 is suitable for pumping grey wastewater from a washing machine, dishwasher, bath tub, cabinet shower, washbasin or kitchen sink. The unit is designed for front-wall installations. The professional design enables handling of wastewater at temperatures up to 75 °C during continuous operation and up to 90 °C for up to 30 minutes.

Typical applications:

- Basement installations below sewer level.
- In connection with the renovation or modernisation of existing buildings where the location may be remote from the main soil pipe so that a natural slope cannot be established, for example attics.



TM05 0388 0911

Fig. 29 Example of application

Features and benefits

Robustness and operational reliability

- The powerful motor ensures optimum operational reliability when pumping grey wastewater at temperatures up to 90 °.

Easy installation and replacement

- Height-adjustable discharge and inlet connections ensure easy installation and replacement.
- Two selectable levels fit any application, and the slim design enables installation in confined spaces.

Easy maintenance and service

- The removable, compact pump-motor unit makes any service job a fast and clean matter.
- No need to disconnect discharge and inlet pipes or to remove the unit for service.

Sizing guide

As Sololift2 C-3 is used with several combinations of units, it is necessary to consider the maximum performance of the unit in relation to different discharge pipe diameters at a minimum self-cleaning velocity of 0.7 m/s.

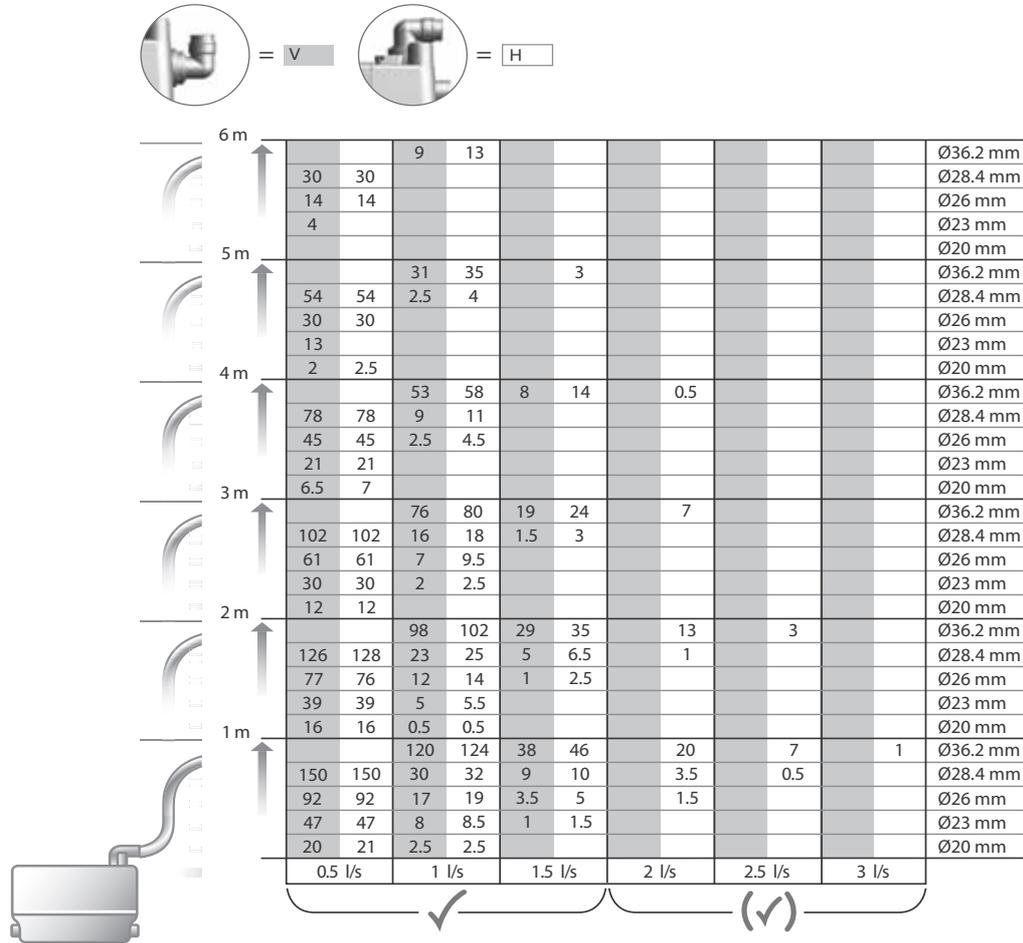


Fig. 30 Pipe length and height in relation to inner pipe diameter and required discharge capacity

Figure 30 shows the maximum lengths and heights of discharge pipes in metres in relation to inner pipe diameter and discharge capacity of the unit. To ensure optimum operation, the total inflow must not exceed the discharge capacity stated in the table, depending on pipe diameter, height and length. Four bends, a non-return valve and an isolating valve have already been taken into account.

If the discharge capacity exceeds 1.5 l/s, the noise level may increase. We recommend to choose a pipe diameter that ensures a discharge capacity below 1.5 l/s, if possible, when no discharge capacity above 1.5 l/s is required.

Construction features

Sololift2 C-3	Description
	<p>Pos. Operational reliability</p> <p>1 Motor The powerful motor enables pumping of grey wastewater at temperatures up to 90 °C from domestic and commercial washing machines and dishwashers. Motor protection by thermal switch with automatic restart. Three shaft seals and an additional V-ring ensure long operational life.</p> <p>2 Free passage Vortex pump with a free passage of 20 mm and internal self-venting valve for stable start.</p> <p>3 Venting valve Venting valve with carbon filter and overflow protection. Possibility of connecting a vent pipe, for example over roof.</p> <p>4 Tank Welded tank design which is pressure-tight up to 2.5 m water column.</p> <p>5 Non-return valves Non-return valves prevent back- and cross-flow to inlet pipes.</p>
	<p>Pos. Easy maintenance and service</p> <p>6 Access to components Design with dry motor for easy and clean service.</p> <p>7 Compact block unit Pump, motor and controller form a compact block unit which is easy to remove for service and replacement. No need to disconnect the Sololift2 tank and connected pipes when service is required.</p> <p>8 Auto coupling Self-adjusting auto coupling eases assembly.</p> <p>9 Screws All important screws are captive screws, which facilitates service work.</p> <p>10 Level switch The level switch can be removed without getting into contact with the inside of the tank.</p> <p>11 Two start levels Two start levels available, i.e. a low start level which is suitable for modern flat shower trays and a higher start level which is suitable for the inflow from a washing machine or bath tub.</p> <p>12 Drain connection Separate tank drain function is available by connecting a drain hose.</p> <p>13 Bottom Bottom design with strong chamfer to prevent sedimentation in corners.</p>
	<p>Pos. Easy installation and replacement</p> <p>14 Dimensions Very compact dimensions. The position of discharge and inlet connections ensures easy replacement of Sololift+ and similar units of other makes. No extra work on pipes required.</p> <p>15 Inlet Eccentric, height-adjustable connectors for side inlets, i.e. in addition to the inlet at the top of the tank.</p> <p>16 Discharge A turnable 360 ° adapter incorporating a non-return valve enables vertical or horizontal discharge direction for easy replacement.</p> <p>17 Feet for floor-mounting Feet for floor-mounting are easy to install.</p> <p>18 Pre-fabricated plug for installation of an optional alarm float switch. Can also be retrofitted.</p>

Installation requirements

This section shows installation examples and describes the installation requirements. Installation is done quickly and easily by using flexible hose connectors with several adapter options for almost any pipe diameter.

The start/stop levels are made for the modern flat shower trays.

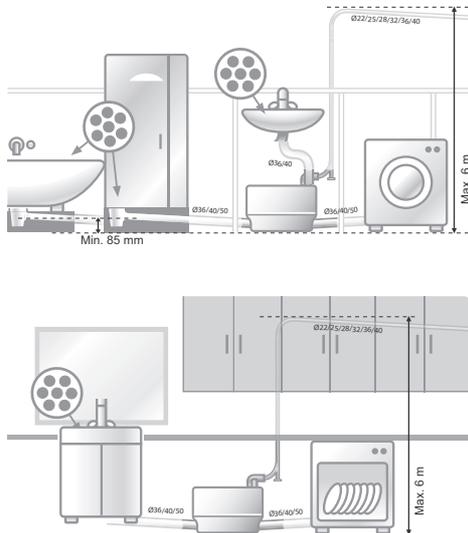


Fig. 31 Examples of installation

Note: The first part of the discharge pipe should preferably be vertical. All horizontal pipes must have a fall of minimum 1 % to the main soil pipe.

The measurements in fig. 32 must be observed.

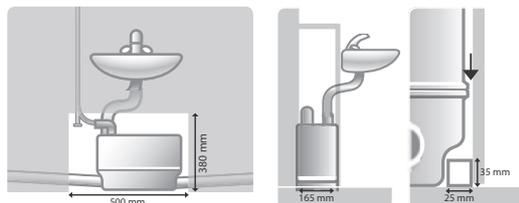


Fig. 32 Measurements to be observed

When the unit is located inside a wall or in a floor unit, observe the minimum measurements to ensure that the unit can be inspected and is accessible for service.

The float switch can be removed to adjust a higher start level to increase the pump performance for larger inflow from a washing machine, dishwasher or bath tub. The float switch can also be removed for inspection and cleaning, if necessary. See fig. 33.

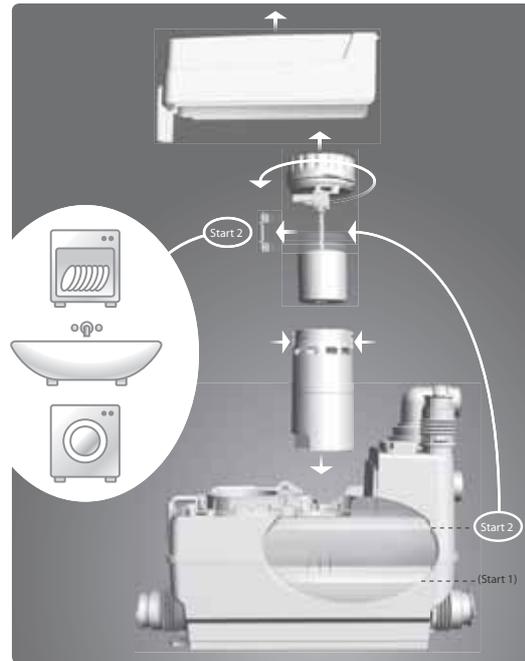


Fig. 33 Adjustment of the float switch

Connections



Fig. 34 Horizontal or vertical discharge

The turnable 360 ° discharge adapter can be fitted horizontally or vertically. The adapter incorporates a non-return valve.

The discharge and inlet connections can be adapted to the following pipe diameters:

Connection	Outer diameter					
	Ø22	Ø25	Ø28	Ø32	Ø40	Ø50
Discharge	•	•	•	•	•	-
Inlet at the top	-	-	-	•	•	-
Inlet from side ¹⁾	-	-	-	-	•	•

¹⁾ One connector is included. Further connectors available as accessories.

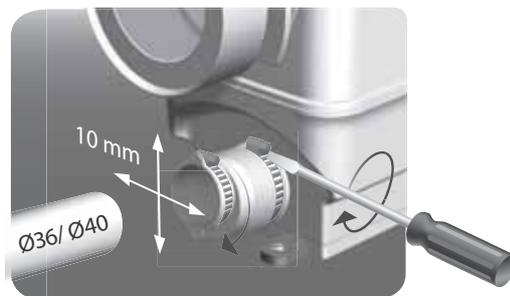



Fig. 35 Height and side alignment possible when using Ø40 inlet pipes

Product numbers

Product	Plug	Sales region	Prod. no.
Sololift2 C-3	No plug	Saudi Arabia	98622989

Accessories

Product	Description	Prod. no.
Replacement hose 	Flexible PVC hose with two clamps and an adapter for the discharge of Sololift2. Dimensions: • Length: 500 mm. • Inner diameter: Ø32. • Outer diameter: Ø38.	97772316
Adapter kit, inlet 	Kit, second inlet Ø50/50/40	97775335

Technical data

Mechanical data

Net weight	6.6 kg
Tank volume	5.7 litres
Flexible discharge elbow	Ø22/25/28/32/36/40
Dimensions of possible inlet	1 x Ø32/40 on the top 2 x Ø40/50 in the side
Start and stop levels	Start level 1: 65 mm above floor level Start level 2: 115 mm above floor level Stop level: 35 mm above floor level
pH value of the pumped liquid	4-10
Maximum liquid temperature	75 °C continuously 90 °C for 30 minutes
Ambient temperature	5-35 °C
Noise level	< 70 dB(A)
Duty class	S3-50 % - 1 min. (30 sec. on; 30 sec. off)

Electrical data

Supply voltage	1 x 220 V - 10 %/+ 6 %, 60 Hz
Power consumption, P1	Max. 630 W
Rated current	3.1 A
Power factor, cos φ	0.93
Speed	3400 min ⁻¹
Enclosure class	IP44
Insulation class	F
Connecting cable	1.2 m, 0.75 mm ² (H05VV-F-3G)

Dimensions

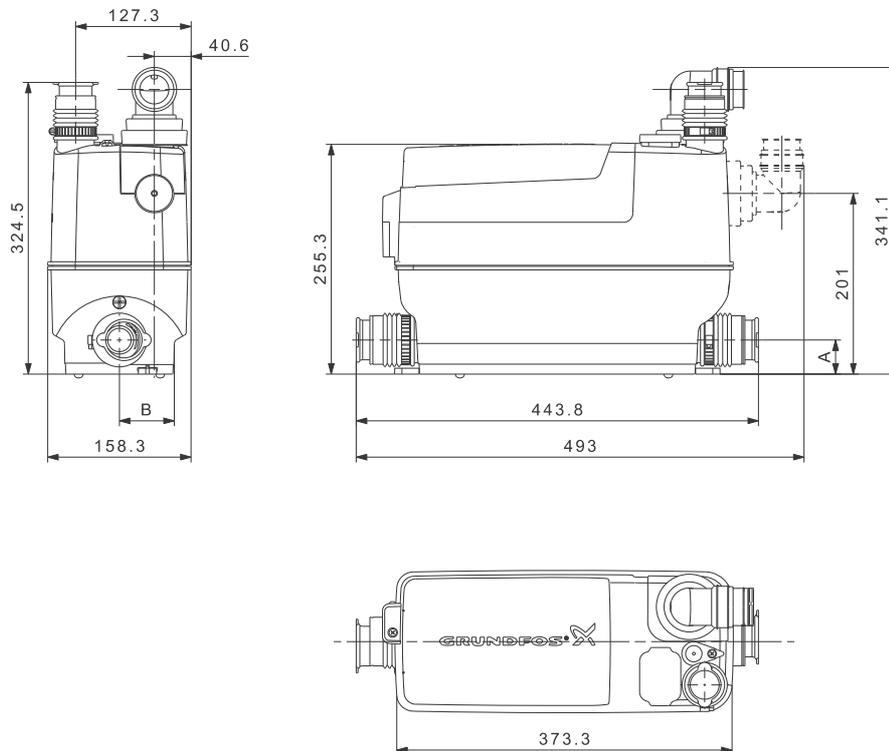


Fig. 37 Dimensional drawings, Sololift2 C-3

Pipe diameter	Type	A [mm]		B [mm]	
		Min.	Max.	Min.	Max.
Ø40	Eccentric	33	43	56	66
Ø50	Centric	38		61	

Performance

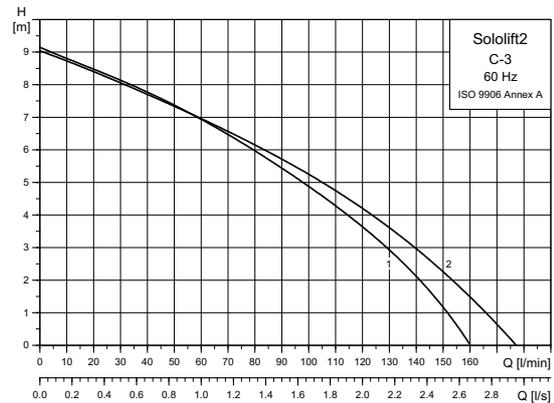


Fig. 36 Performance curves, Sololift2 C-3

Legend

Pos.	Description
1	Horizontal outlet
2	Vertical outlet

TM06 1749 2714

TM06 1390 2314

6. Sololift2 D-2

Sololift2 D-2 is a small, compact, ready-to-install automatic lifting station. It is suitable for pumping grey wastewater without faeces from any kind of building. The unit is designed according to EN 12050-2.



TM04 9732 5010

Fig. 38 Sololift2 D-2

Applications

Sololift2 D-2 is suitable for pumping grey wastewater from a washbasin, cabinet shower or bidet. The unit is designed for front-wall installation or installation in a cabinet under a sink.

Typical applications:

- Basement installations below sewer level.
- In connection with the renovation or modernisation of existing buildings where the location may be remote from the main soil pipe so that a natural slope cannot be established, for example attics.



TM05 0400 0911

Fig. 39 Example of application

Features and benefits

Robustness and operational reliability

- The powerful motor, crankcase and shaft in contact with wastewater are made of stainless steel.

Easy installation and replacement

- Slim design for installation in confined spaces.

Easy maintenance and service

- The removable, compact pump-motor unit makes any service job a fast and clean matter.
- No need to disconnect discharge and inlet pipes or to remove the unit for service.

Sizing guide

As Sololift2 D-2 is used with several combinations of units, it is necessary to consider the maximum performance of the unit in relation to different discharge pipe diameters at a minimum self-cleaning velocity of 0.7 m/s.



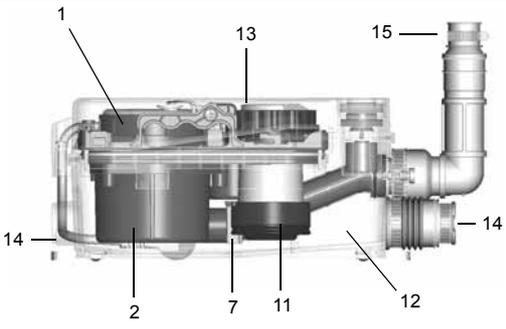
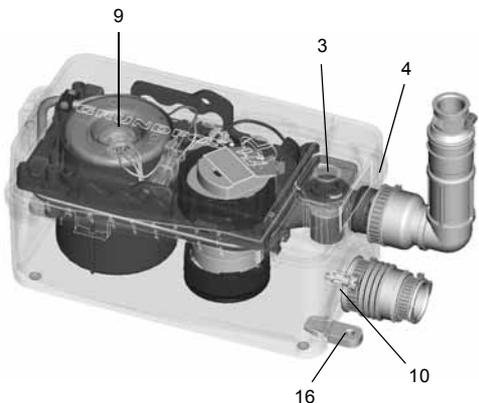
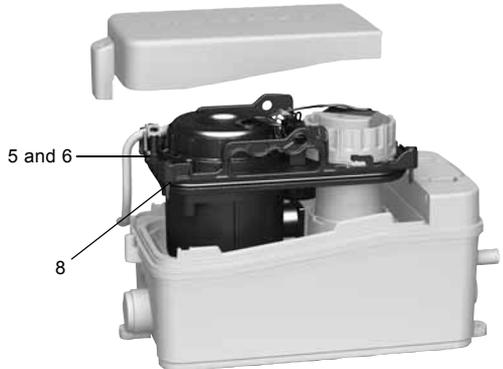
4 m					Ø28.4 mm
3 m	6				Ø20 mm
2 m	22	0.1			Ø20 mm
1 m	37	4.5	3		Ø28.4 mm
	52	9.5	10		Ø20 mm
	0.25 l/s	0.5 l/s	1 l/s	1.5 l/s	

Fig. 40 Pipe length and height in relation to inner pipe diameter and required discharge capacity

Figure 40 shows the maximum lengths and heights of discharge pipes in metres in relation to inner pipe diameter and discharge capacity of the unit. To ensure optimum operation, the total inflow must not exceed the discharge capacity stated in the table, depending on pipe diameter, height and length. Four bends, a non-return valve and an isolating valve have already been taken into account.

TM05 0527 1211


Construction features

Sololift2 D-2	Description
	<p>Pos. Operational reliability</p> <p>1 Motor The powerful motor enables pumping of grey wastewater. Motor protection by thermal switch with automatic restart. Three shaft seals ensure long operational life.</p> <p>2 Free passage Pump with a free passage of 10 mm and internal self-venting valve for stable start.</p> <p>3 Venting valve Venting valve with carbon filter and overflow protection. Possibility of connecting a vent pipe, for example over roof.</p> <p>4 Tank Welded tank design which is pressure-tight up to 2.5 m water column.</p>
	<p>Pos. Easy maintenance and service</p> <p>5 Access to components Design with dry motor for easy and clean service.</p> <p>6 Compact block unit Pump, motor and controller form a compact block unit which is easy to remove for service and replacement. Other components can be replaced as single parts.</p> <p>7 Auto coupling Self-adjusting auto coupling eases assembly.</p> <p>8 Screws All important screws are captive screws, which facilitates service work.</p> <p>9 Anti-blocking Manual anti-blocking function for deblocking of the motor. No dismantling required.</p> <p>10 Drain connection Separate tank drain function is available by connecting a drain hose.</p>
	<p>11 Level switch Level switch with low start level which is suitable for modern flat shower trays. The level switch can be removed without getting into contact with the inside of the tank. All electrical parts are positioned outside the tank.</p> <p>12 Bottom Bottom design with strong chamfer to prevent sedimentation in corners.</p>
	<p>Pos. Easy installation and replacement</p> <p>13 Slim design Very slim design that fits into the smallest cabinets/cupboards, for example under a washbasin.</p> <p>14 Connecting pieces Two connecting pieces for side inlets.</p> <p>15 Discharge Vertical, turnable discharge incorporating a non-return valve.</p>
	<p>16 Feet for floor-mounting Feet for floor-mounting are easy to install.</p>
	

Installation requirements

This section shows an installation example and describes the installation requirements. Installation is done quickly and easily by using flexible hose connectors with two adapter options to the pipe diameters.


The start/stop levels are made for the modern flat shower trays.

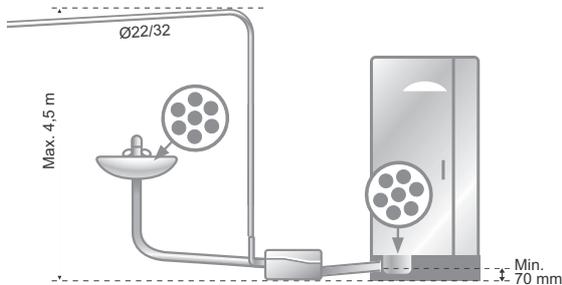

TM05 0404 0911

Fig. 41 Example of installation

Note: The first part of the discharge pipe should preferably be vertical. All horizontal pipes must have a fall of minimum 1 % to the main soil pipe. The measurements in figs 41 and 42 must be observed.

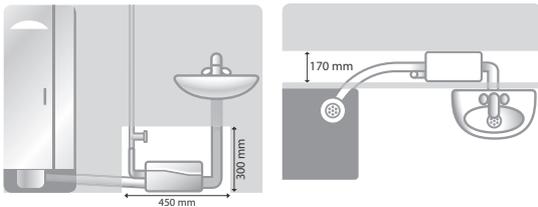

TM05 0508 1111

Fig. 42 Measurements to be observed

When the unit is located inside a wall or in a floor unit, observe the minimum measurements to ensure that the unit can be inspected and is accessible for service.

Connections

The turnable discharge adapter incorporates a non-return valve.

The discharge and inlet connections can be adapted to the following pipe diameters:


Connection	Outer diameter					
	Ø22	Ø25	Ø28	Ø32	Ø40	Ø50
Discharge	•	-	-	•	-	-
Inlet from side	-	-	-	-	•	-

Product numbers

Product	Plug	Sales region	Prod. no.
Sololift2 D-2	No plug	Saudi Arabia	98622990

Accessories

Product	Description	Prod. no.
Adapter kit, inlet		



TM05 0408 0911

Kit, second inlet
Ø40/40/32

97775334

Technical data

Mechanical data

Net weight	4.3 kg
Tank volume	2.0 litres
Flexible discharge elbow	Ø22/32
Dimensions of possible inlet	2 x Ø32/40 in the side
Start and stop levels	Start level: 58 mm above floor level Stop level: 35 mm above floor level
pH value of the pumped liquid	4-10
Maximum liquid temperature	50 °C
Ambient temperature	5-35 °C
Noise level	< 70 dB(A)
Duty class	S3-50 % - 1 min. (30 sec. on; 30 sec. off)

Electrical data

Supply voltage	1 x 220 V - 10 %/+ 6 %, 60 Hz
Power consumption, P1	Max. 290 W
Rated current	1.3 A
Power factor, cos φ	0.98
Speed	3400 min ⁻¹
Enclosure class	IP44
Insulation class	F
Connecting cable	1.2 m, 0.75 mm ² (H05VV-F-3G)

Dimensions

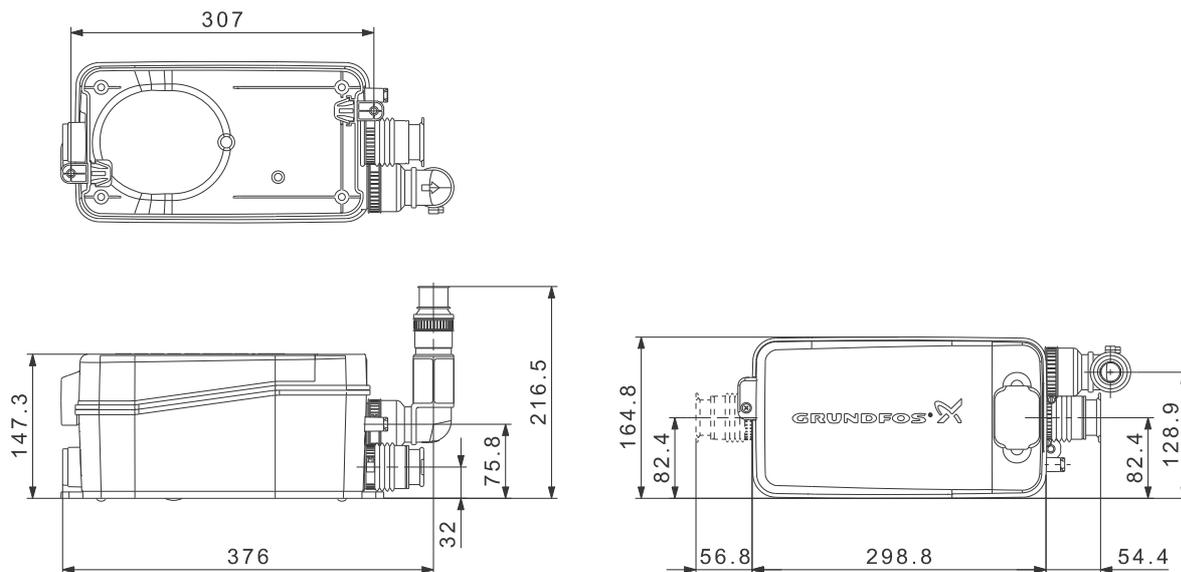


Fig. 44 Dimensional drawings, Sololift2 D-2

Performance

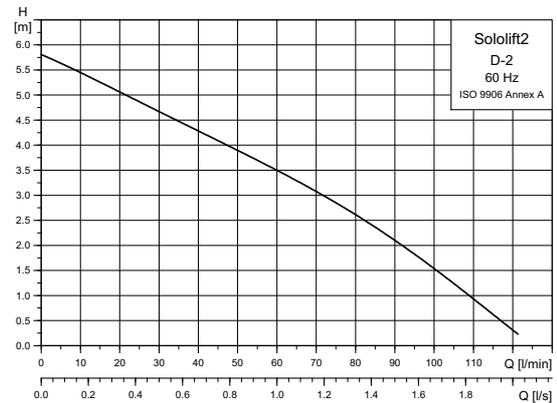


Fig. 43 Performance curves, Sololift2 D-2

TM06 1748 2714

TM06 1391 2314

7. Product range, overview

Product numbers

Overview of available products:

Product	Mains supply	Plug	Sales region	Discharge port	Cable length	Weights		Shipping volume	Product number
						Net	Gross		
					[m]	[kg]	[kg]	[m ³]	
Sololift2 WC-1		No plug	Saudi Arabia	Ø22/25/28/32/36/40		7.3	9.2	0.052	98622960
Sololift2 WC-3		No plug	Saudi Arabia	Ø22/25/28/32/36/40		7.3	9.3	0.052	98622986
Sololift2 CWC-3	1 x 220 V - 10 %/+ 6 %, 60 Hz	No plug	Saudi Arabia	Ø22/25/28/32/36/40	1.2	7.1	9.0	0.046	98622987
Sololift2 C-3		No plug	Saudi Arabia	Ø22/25/28/32/36/40		6.5	8.1	0.036	98622989
Sololift2 D-2		No plug	Saudi Arabia	Ø22/32/36		4.2	4.8	0.022	98622990

Accessories

Product	Description	Applicable to	Product number
Alarm device	Acoustic alarm in case of malfunction. Printed-circuit board to be pushed into an internal slot.	Sololift2 WC-1 Sololift2 WC-3 Sololift2 CWC-3	97772315
Replacement hose	Flexible PVC hose with two clamps and an adapter for the discharge of Sololift2. • Length: 500 mm. • Inner diameter: Ø32. • Outer diameter: Ø38.	Sololift2 WC-1 Sololift2 WC-3 Sololift2 CWC-3 Sololift2 C-3	97772316
Level switch	Magnetic float switch Cable length: 10 m.	Sololift2 C-3	97775337
Adapter kit, inlet	Kit, second inlet Ø40/40/32	Sololift2 D-2	97775334
Adapter kit, inlet	Kit, second inlet Ø50/50/40	Sololift2 WC-3 Sololift2 CWC-3 Sololift2 C-3	97775335
Drain hose	Flexible PVC hose with two clamps and a plug. Applicable when the Sololift2 tank is to be drained for service. • Length: 500 mm. • Inner diameter: Ø12. • Outer diameter: Ø14.4.	Sololift2 WC-1 Sololift2 WC-3	97789093
Extension pipe	Connecting a Sololift2 WC-1 or WC-3 to some toilet variants, such as Ifö, can be a challenge. These toilets have a ceramic frame around the outlet connection at the back preventing (fast) connection to Sololift2. An extension pipe can help the installer speed up installation in those cases.	Sololift2 WC1 Sololift2 WC-3	98162129 (250 mm) 98162133 (160 mm)

Technical data

Product	Rated current	Power (P1)	Cos φ	Enclosure class	Insulation class	Speed	Motor protection	Cable
	[A]	[W]				[min ⁻¹]		
Sololift2 WC-1	3.0	650	0.93					
Sololift2 WC-3	3.0	650	0.93					
Sololift2 CWC-3	3.0	655	0.93	IP44	F	3400	Built-in thermal switch	0.75 mm ² (H05VV-F-3G)
Sololift2 C-3	3.1	630	0.95					
Sololift2 D-2	1.3	290	0.98					


Scope of delivery

Overview of the included fittings:

Product	Fittings included on delivery
 Sololift2 WC-1	TM05 0866 1711 <ul style="list-style-type: none"> • 1 elbow (Ø40 to Ø40-32) • 1 adapter with built-in non-return valve • 1 pipe joint (Ø40 to Ø40-32) • 1 cover valve • 1 adapter (Ø22/32) • 1 adapter (Ø25/32) • 1 adapter (Ø28/32) • Hose clamps (1 x Ø90, 4 x Ø32-50) • 2 feet for floor-mounting • Screws and wall plugs
 Sololift2 WC-3	TM04 9729 5010 <ul style="list-style-type: none"> • 1 elbow (Ø40 to Ø40-32) • 1 adapter with built-in non-return valve • 1 pipe joint (Ø40 to Ø40-32) • 1 pipe joint (Ø50 to Ø50-40) • 1 cover valve • 1 adapter (Ø22/32) • 1 adapter (Ø25/32) • 1 adapter (Ø28/32) • Hose clamps (1 x Ø90, 4 x Ø32-50, 2 x Ø40-60) • 2 feet for floor-mounting • Screws and wall plugs
 Sololift2 CWC-3	TM04 9730 5010 <ul style="list-style-type: none"> • 1 elbow (Ø40 to Ø40-32) • 1 pipe joint (Ø40 to Ø40-32) • 1 pipe joint (Ø50 to Ø50-40) • 1 adapter (Ø22/32) • 1 adapter (Ø25/32) • 1 adapter (Ø28/32) • 1 drain hose • 1 plug for drain hose • Hose clamps (1 x Ø90, 4 x Ø32-50, 2 x Ø40-60, 2 x Ø8-16) • 2 feet for floor-mounting • Screws and wall plugs
 Sololift2 C-3	TM04 9731 5010 <ul style="list-style-type: none"> • 1 elbow (Ø40 to Ø40-32) • 1 pipe joint (Ø40 to Ø40-32) • 1 pipe joint (Ø50 to Ø50-40) • 1 non-return valve • 1 cover valve • 1 adapter (Ø22/32) • 1 adapter (Ø25/32) • 1 adapter (Ø28/32) • 1 drain hose • 1 plug for drain hose • Hose clamps (4 x Ø32-50, 2 x Ø40-60, 2 x Ø8-16) • 2 feet for floor-mounting • Screws and wall plugs
 Sololift2 D-2	TM04 9732 5011 <ul style="list-style-type: none"> • 1 pipe joint (Ø40 to Ø40-32) • 1 outlet fitting (elbow) • 1 adapter (Ø25/32) • 1 adapter (Ø28/32) • 1 drain hose • 1 plug for drain hose • Hose clamps (4 x Ø32-50, 2 x Ø40-60, 2 x Ø8-16) • 2 feet for floor-mounting • Screws and wall plugs

8. Further product information

WebCAPS

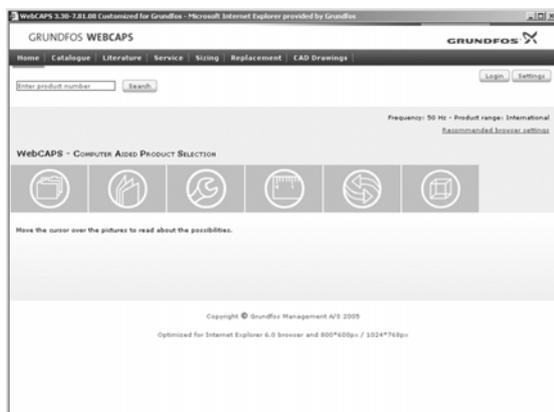

WebCAPS is a **Web-based Computer Aided Product Selection** program available on www.grundfos.com.

WebCAPS contains detailed information on more than 220,000 Grundfos products in more than 30 languages.

Information in WebCAPS is divided into six sections:


- Catalogue
- Literature
- Service
- Sizing
- Replacement
- CAD drawings.



Catalogue

Based on fields of application and pump types, this section contains the following:


- technical data
- curves (QH, Eta, P1, P2, etc.) which can be adapted to the density and viscosity of the pumped liquid and show the number of pumps in operation
- product photos
- dimensional drawings
- wiring diagrams
- quotation texts, etc.

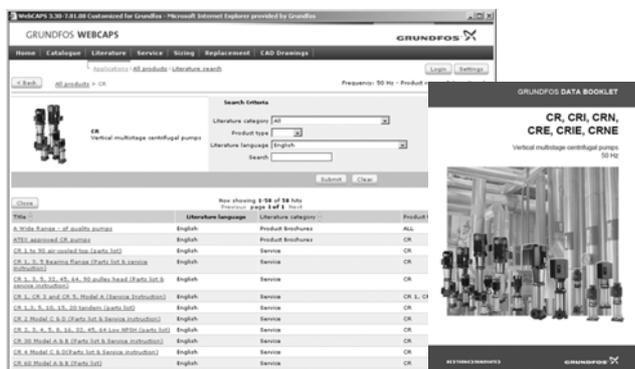

Literature

This section contains all the latest documents of a given pump, such as

- data booklets
- installation and operating instructions
- service documentation, such as Service kit catalogue and Service kit instructions
- quick guides
- product brochures.

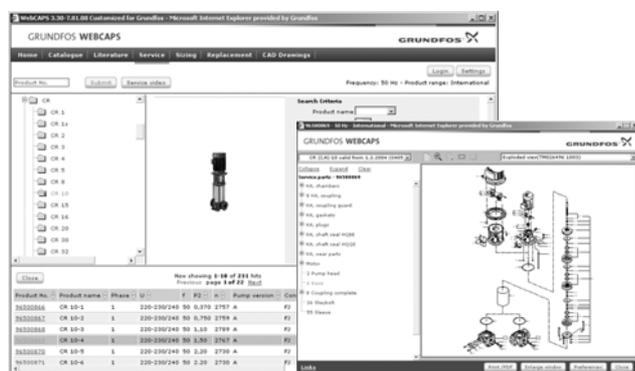

Service

This section contains an easy-to-use interactive service catalogue. Here you can find and identify service parts of both existing and discontinued Grundfos pumps.

Furthermore, the section contains service videos showing you how to replace service parts.



Sizing

This section is based on different fields of application and installation examples and gives easy step-by-step instructions in how to size a product:

- Select the most suitable and efficient pump for your installation.
- Carry out advanced calculations based on energy, consumption, payback periods, load profiles, life cycle costs, etc.
- Analyse your selected pump via the built-in life cycle cost tool.
- Determine the flow velocity in wastewater applications, etc.



Replacement

In this section you find a guide to selecting and comparing replacement data of an installed pump in order to replace the pump with a more efficient Grundfos pump.

The section contains replacement data of a wide range of pumps produced by other manufacturers than Grundfos.

Based on an easy step-by-step guide, you can compare Grundfos pumps with the one you have installed on your site. When you have specified the installed pump, the guide will suggest a number of Grundfos pumps which can improve both comfort and efficiency.



CAD drawings

In this section, it is possible to download 2-dimensional (2D) and 3-dimensional (3D) CAD drawings of most Grundfos pumps.

These formats are available in WebCAPS:

- 2-dimensional drawings:
- .dxf, wireframe drawings
 - .dwg, wireframe drawings.
- 3-dimensional drawings:
- .dwg, wireframe drawings (without surfaces)
 - .stp, solid drawings (with surfaces)
 - .eprt, E-drawings.



WinCAPS



Fig. 45 WinCAPS DVD

WinCAPS is a **Windows-based Computer Aided Product Selection** program containing detailed information on more than 220,000 Grundfos products in more than 30 languages.

The program contains the same features and functions as WebCAPS, but is an ideal solution if no internet connection is available.

WinCAPS is available on DVD and updated once a year.

GO CAPS

Mobile solution for professionals on the GO!



CAPS functionality on the mobile workplace.



Subject to alterations.

be think innovate

98691948 0714

ECM: 1135985

GRUNDFOS A/S
DK-8850 Bjerringbro . Denmark
Telephone: +45 87 50 14 00
www.grundfos.com

GRUNDFOS 

The name Grundfos, the Grundfos logo, and be think innovate are registered trademarks owned by Grundfos Holding A/S or Grundfos A/S, Denmark. All rights reserved worldwide. © Copyright Grundfos Holding A/S