
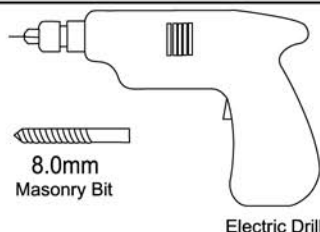
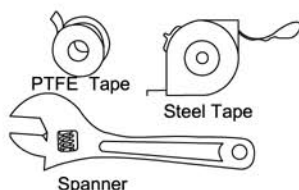




# Towel Rail Installation

- . review instructions carefully before installation
- . installation should be completed by a suitably qualified person
- . please dispose of packaging in a responsible manner

## tools required




## parts required

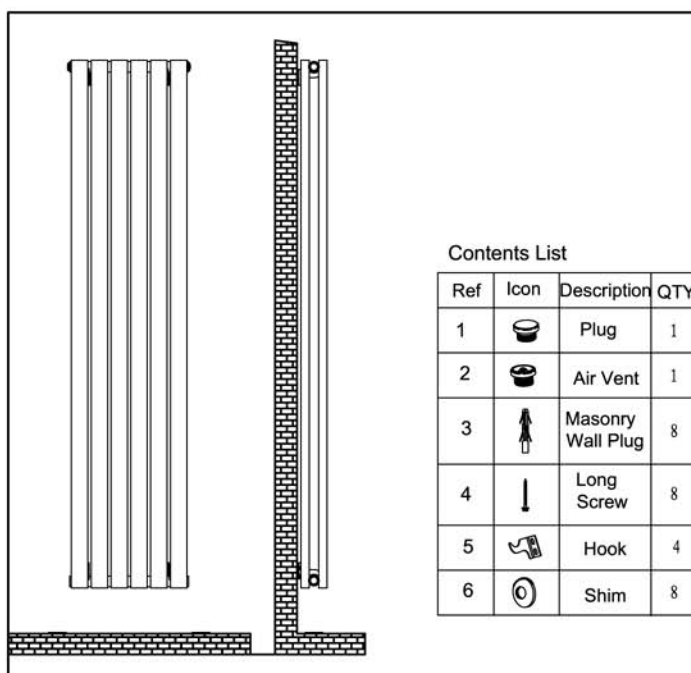

## A



1. Install 1 (plug) and 2 (air vent) in the right position. (figure I)

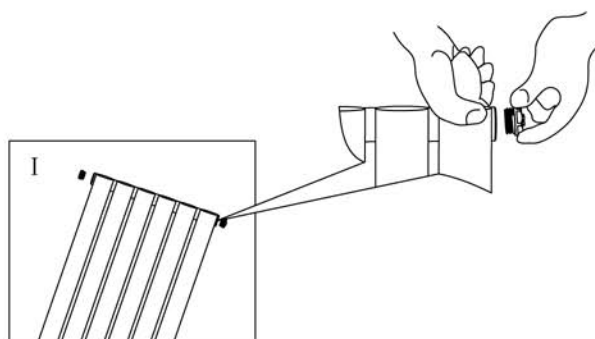

ATTENTION: To avoid accident, PLS fasten the thread exactly.




## B

1. Choose an appropriate position and mark the fixing points with a pencil.






## C

1. Drill a hole on the marked place by  $\varnothing 8\text{mm}$  electric drill. (Figure I)
2. Insert 3 (Wall Plug) into the  $\varnothing 8\text{mm}$  hole. (Figure II)
3. Place 4 (Long Screw) through 6 (Shim) and 5 (Hook), tighten it into the 3 (Wall plug). (Figure III)

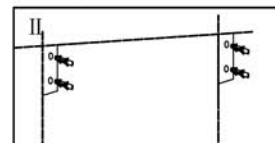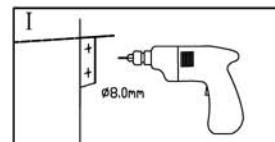

ATTENTION: Do not fix the bottom hooks completely because the position of towel warmer will be adjusted while installing.

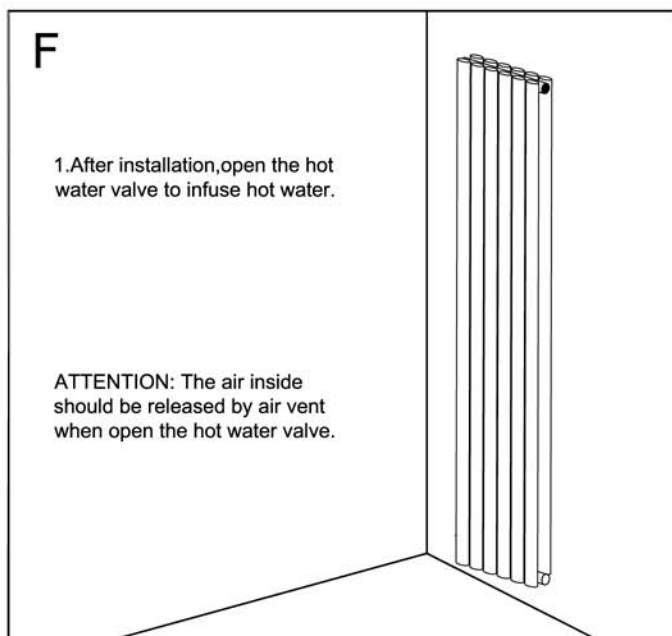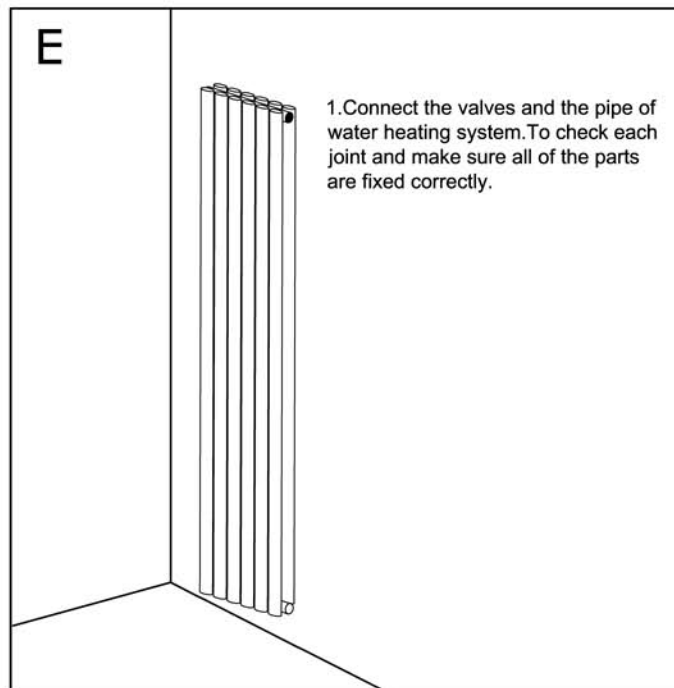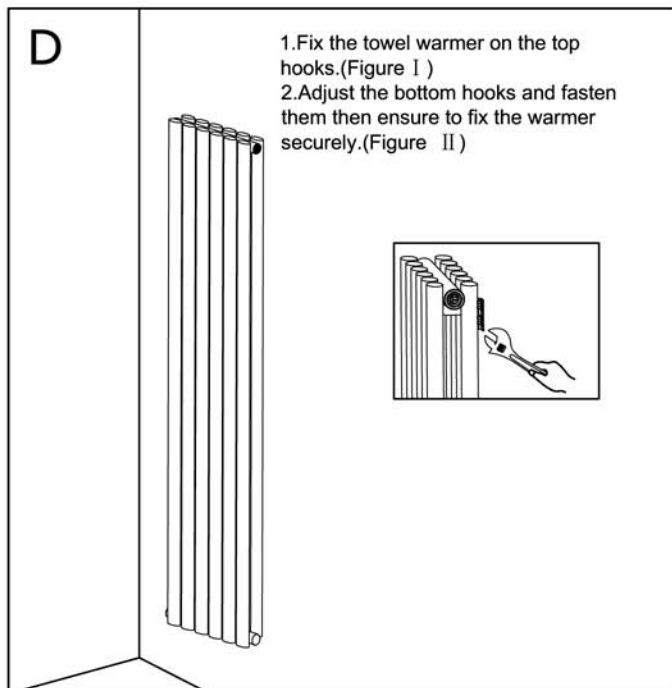

#### After installation . . .

- Use a screwdriver to open the air vent, open the valve and let the water rush into the towel warmer. Check all connections for leaks.
- Once water overflows from the air vent, there is no air in the tube.
- Use a screwdriver to close the air vent, turn on the valve and the towel warmer is ready for use.

#### After care . . .

- Classic towel warmers are made from steel with chrome plating, and should not be cleaned with corrosive or scouring cleaning agents.

#### Please note . . .

- This product can only be used at  $PN \leq 1\text{MPa}$  ( $10\text{g/cm}^2$ , 10 Bar), It should only be filled with water, and at a temperature below  $100^\circ\text{C}$  ( $212^\circ\text{F}$ ). See table below for installation requirements.
- If the temperature exceeds  $48^\circ\text{C}$  (or  $120^\circ\text{F}$ ), please show a warning sign near the product to avoid burning and scolding accidents.

Fill $\frac{3}{4}$ Full	Pressure	Temperature	Comments
water only	$PN \leq 1\text{Mpa}$	$0^\circ\text{C} < t \leq 100^\circ\text{C}$	If ambient temperature drops below $1^\circ\text{C}$ , drain out the water to prevent freezing.