

LEFT HAND VERSION

UNPACK THE BOX AND ENSURE ALL COMPONENTS ARE PRESENT.





NO REFUNDS OR REFITTING COST WILL BE GIVEN IF INCOMPLETE OR DAMAGED GOODS ARE FITTED.


THE TOUGHENED SAFETY GLASS SHOULD BE HANDLED WITH CARE AS IMPACTS WILL DAMAGE THE GLASS OR ENCLOSURE.







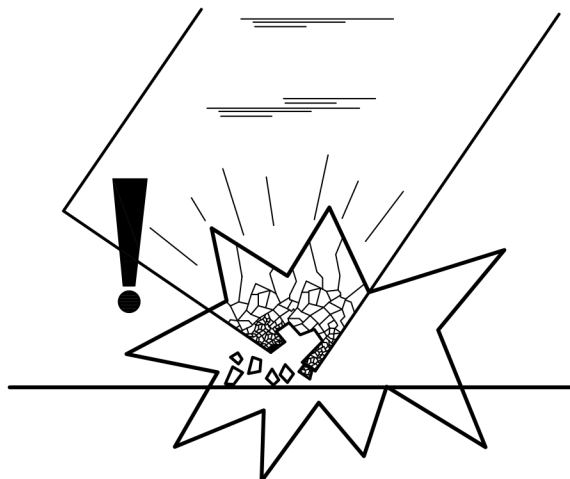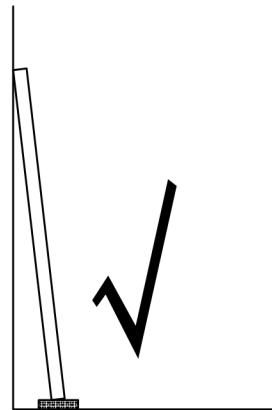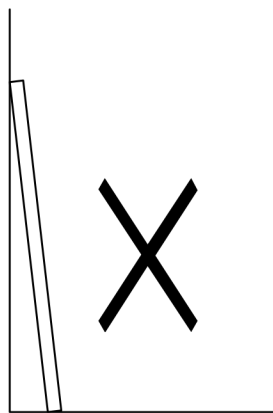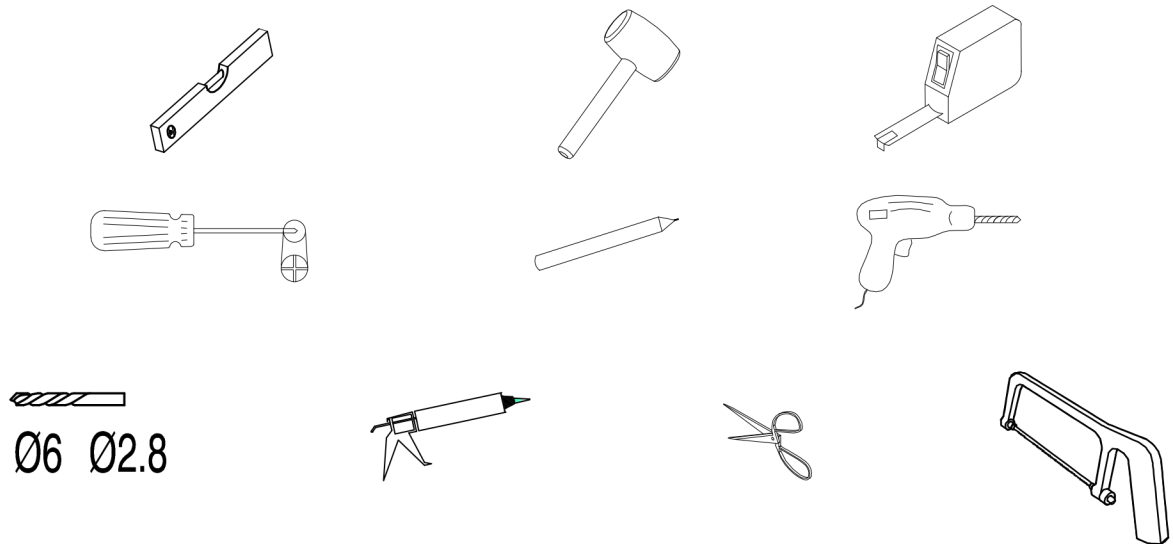

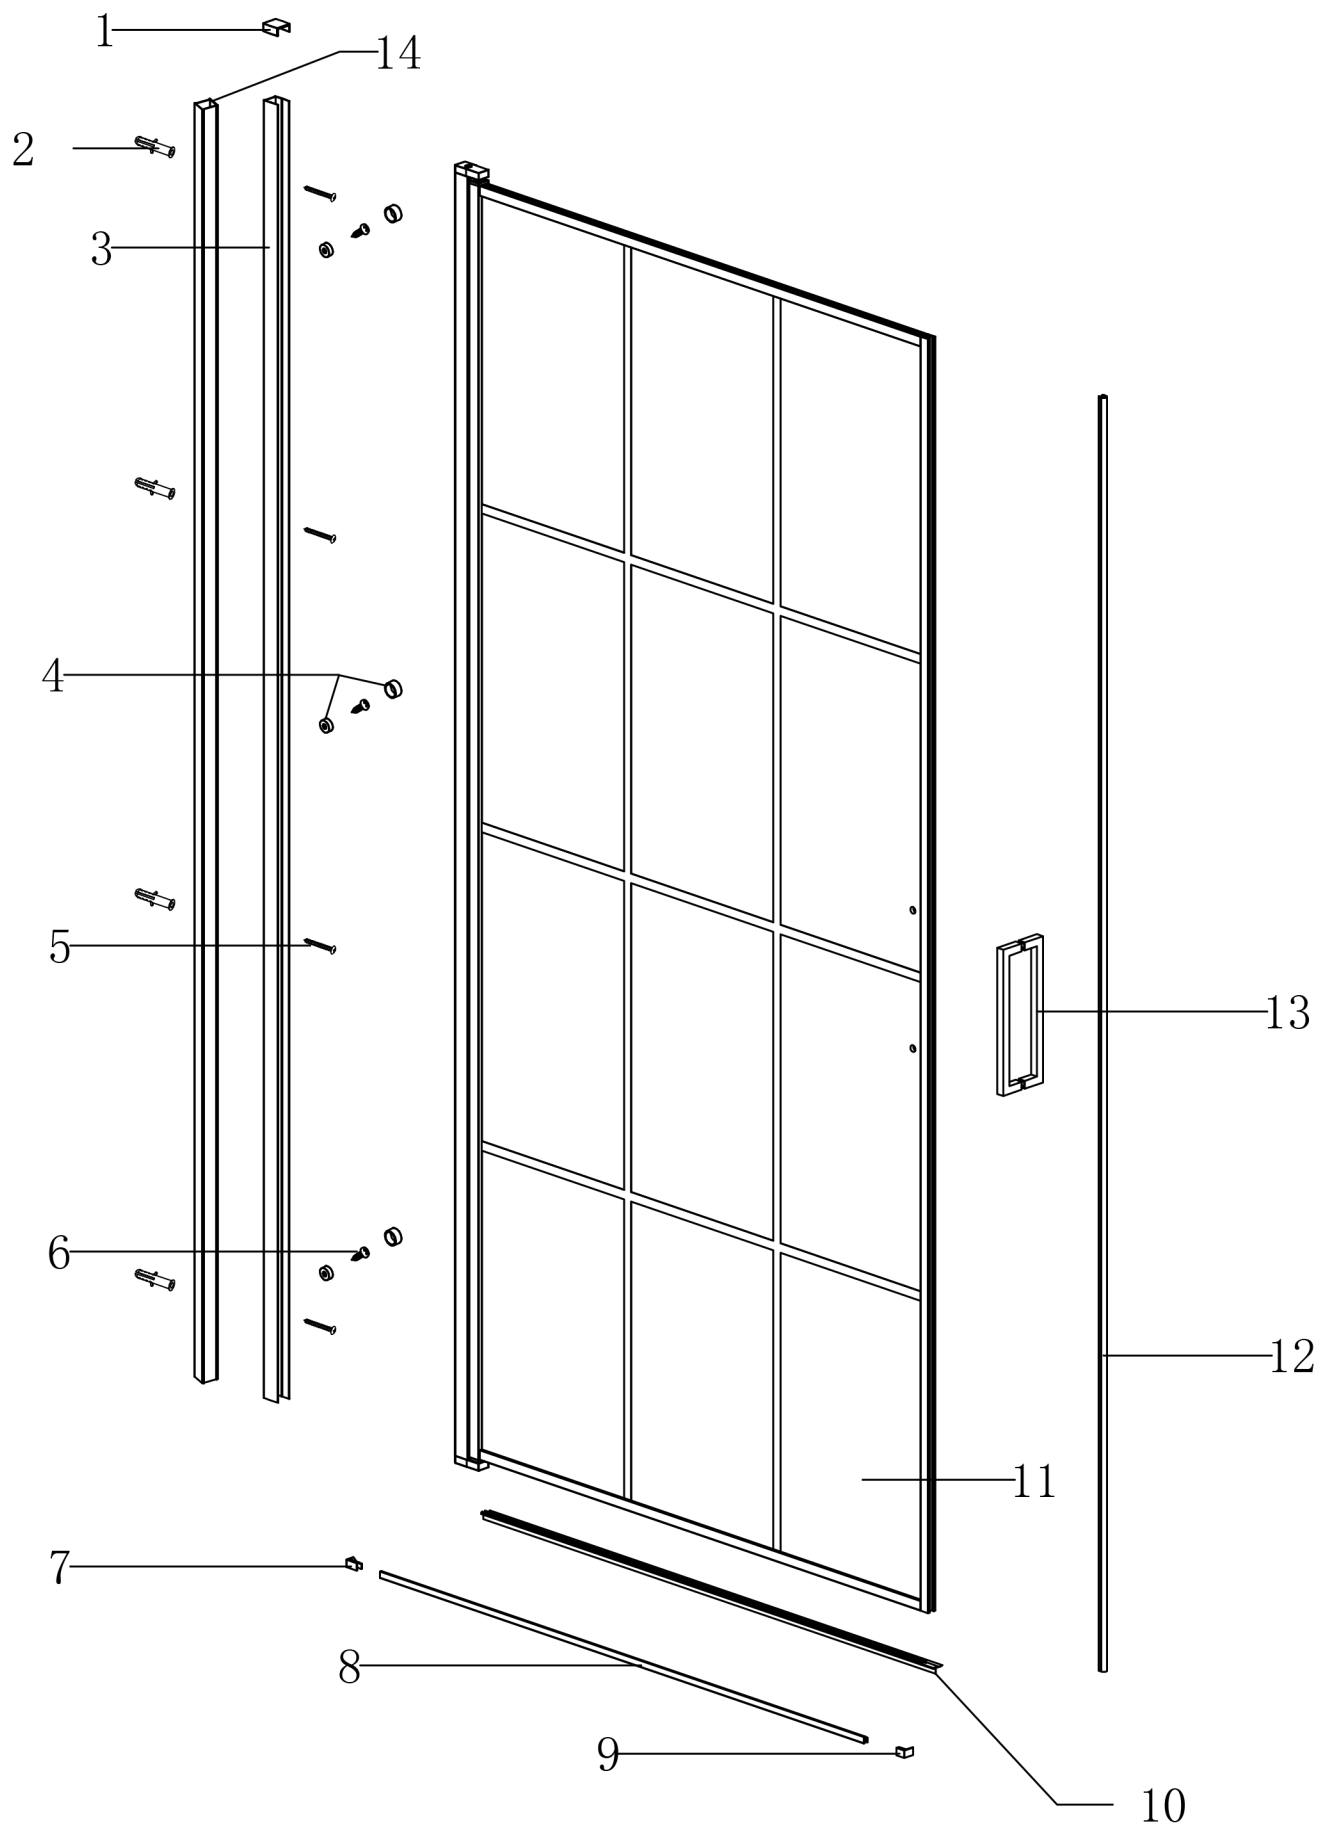







FIT THE SHOWER TRAY AS PER THE MANUFACTURERS INSTRUCTIONS. NOTE: IF THE TRAY ISN'T TRUE AND LEVEL, IT MUST BE RECTIFIED BEFORE SILICONING AROUND THE TOP EDGE OF THE TRAY WHERE IT MEETS THE TILES.

ALLOW THE SILICONE TO DRY BEFORE FITTING THE ENCLOSURE.


TOOLS REQUIRED POWER DRILL - 6mm
MASONARY DRILL BIT CROSS HEAD SCREW
DRIVER - TAPE MEASURE - PENCIL SILICONE
GUN WITH SANITARY GRADE SEALANT - SPIRIT
LEVEL.















serial number	graphical	name	quantity	remarks
1			1 PCS	
2		Ø6	4 PCS	
3			1 PCS	
4			3 PCS	
5		ST3.9X35	4 PCS	
6		ST3.5X9.5	3 PCS	
7			1 PCS	
8			1 PCS	
9			1 PCS	
10			1 PCS	
11			1 PCS	
12			1 PCS	
13			1 PCS	
14			1 PCS	
15		2.5mm	1 PCS	
16		ST3.9X55	4 PCS	

Type	Size (mm)	Installation size (mm)	Installation size (mm)	Installation size (mm)
MBPD+PDSPB		B	C	D
	700x1970	645-690	678-688	663-673
	800x1970	745-790	778-788	763-773
	900x1970	845-890	878-888	863-873
	1000x1970	945-990	978-988	963-973

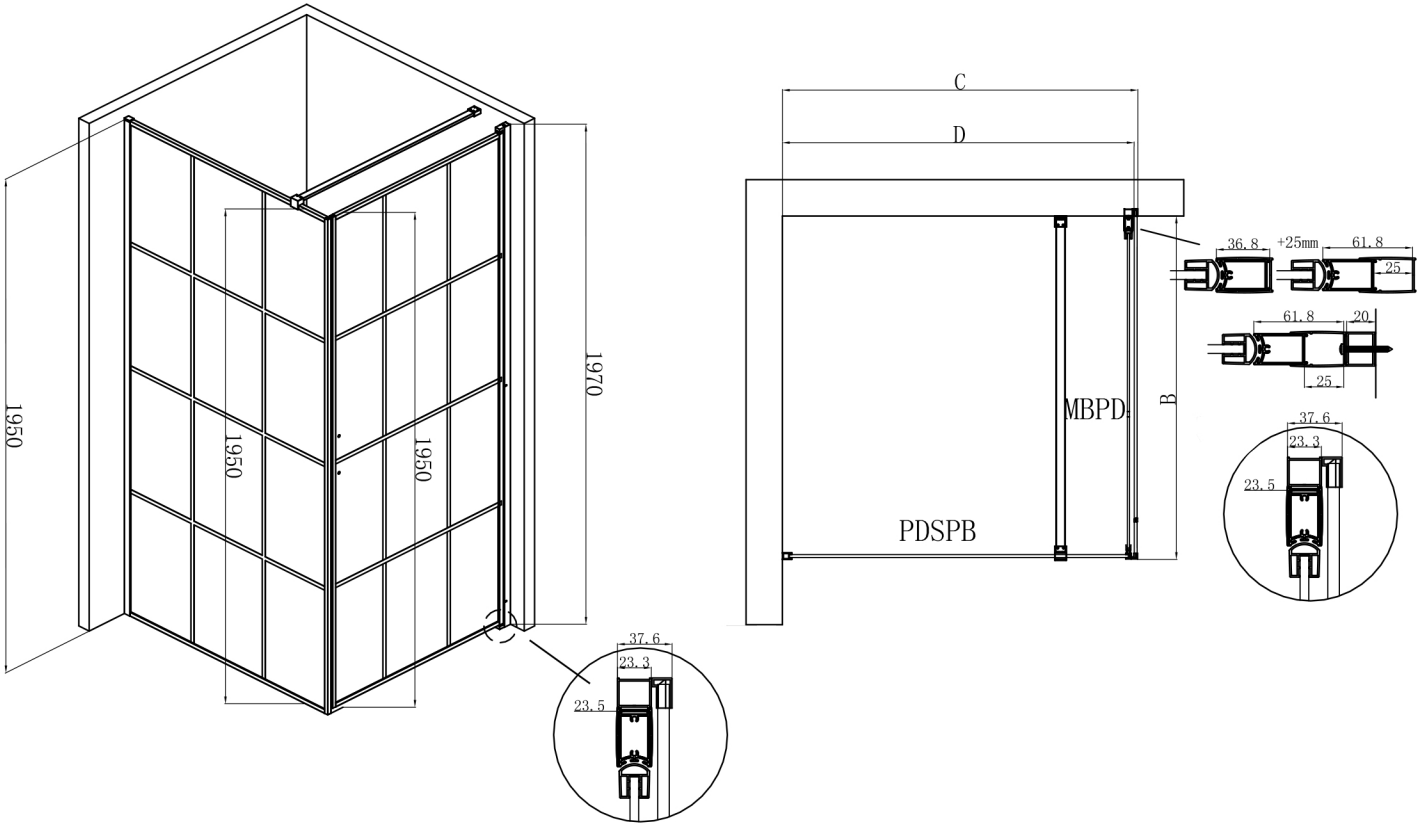



Type	Size (mm)	Installation size (mm)	Entrance size (mm)
MBPD		A	
	700x1970	660-700	575±10
	800x1970	760-800	675±10
	900x1970	860-900	775±10
	1000x1970	960-1000	875±10




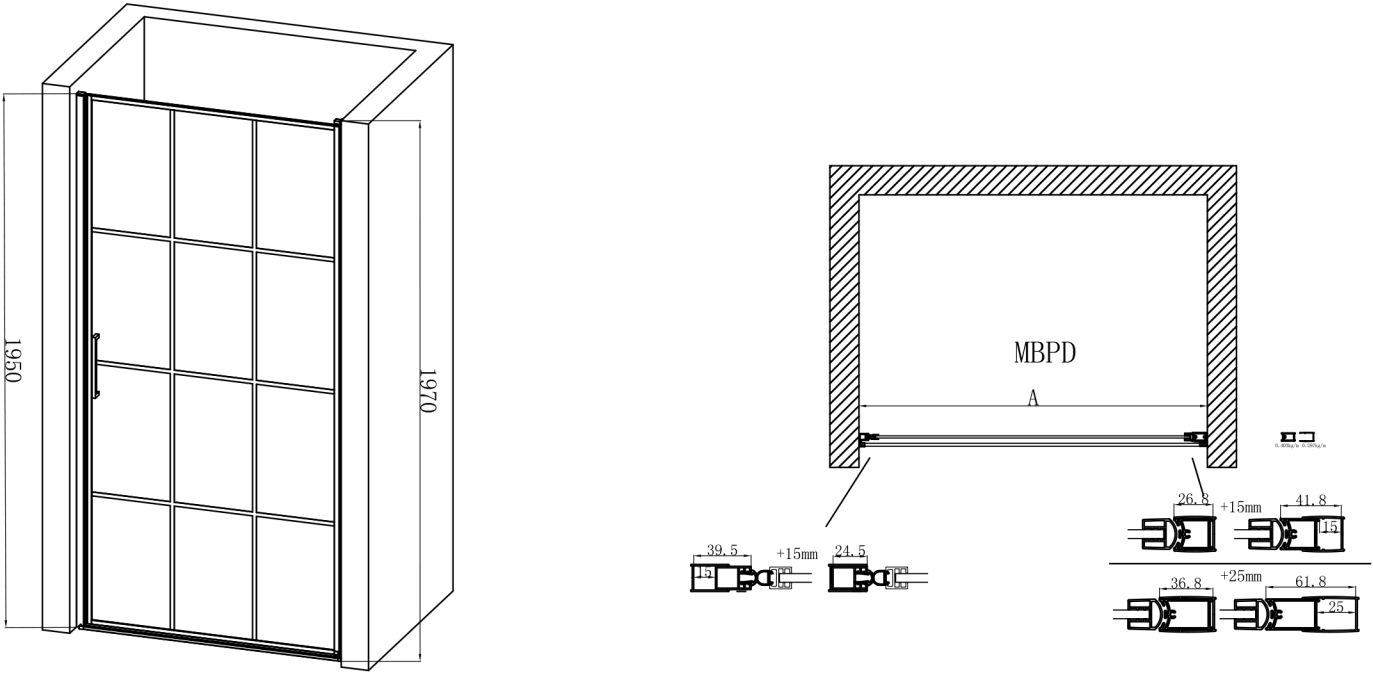





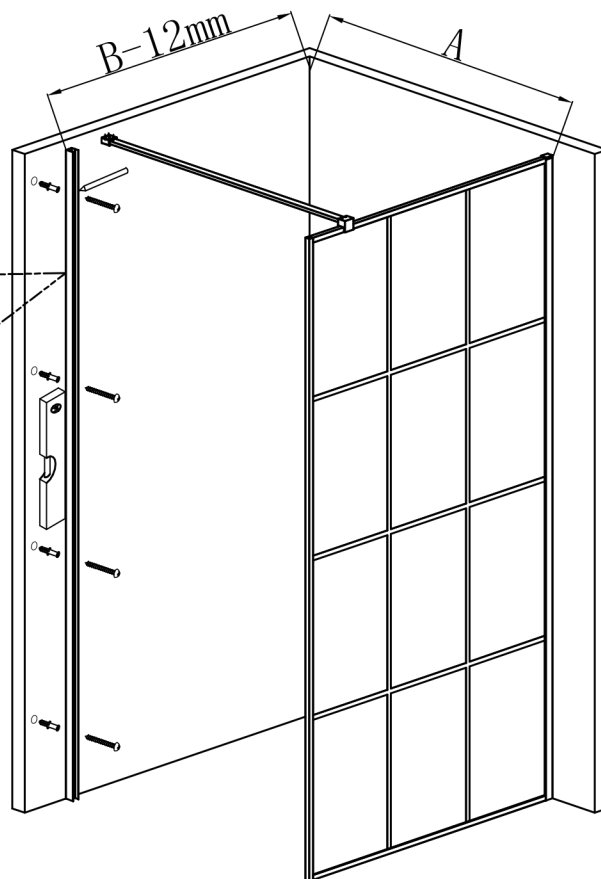
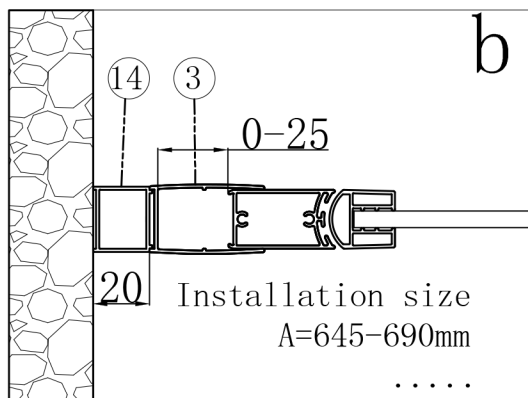
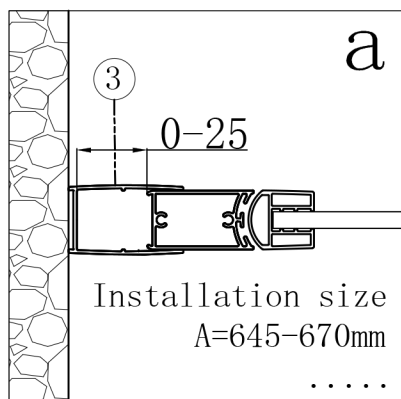





Installation size
A=645-670mm
.....

Installation size
A=645-690mm
.....

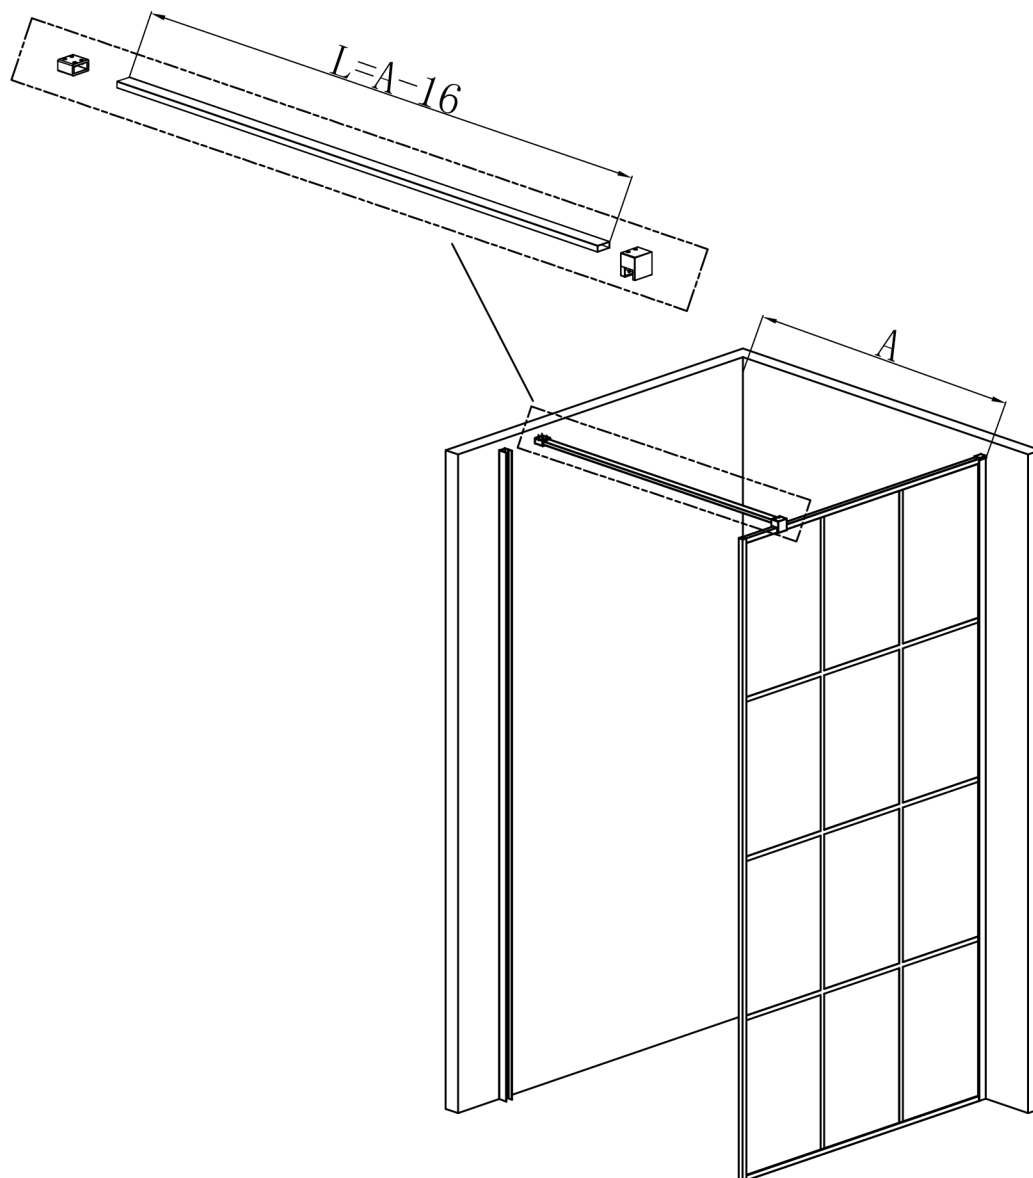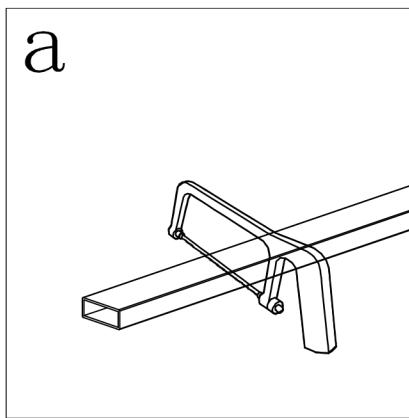

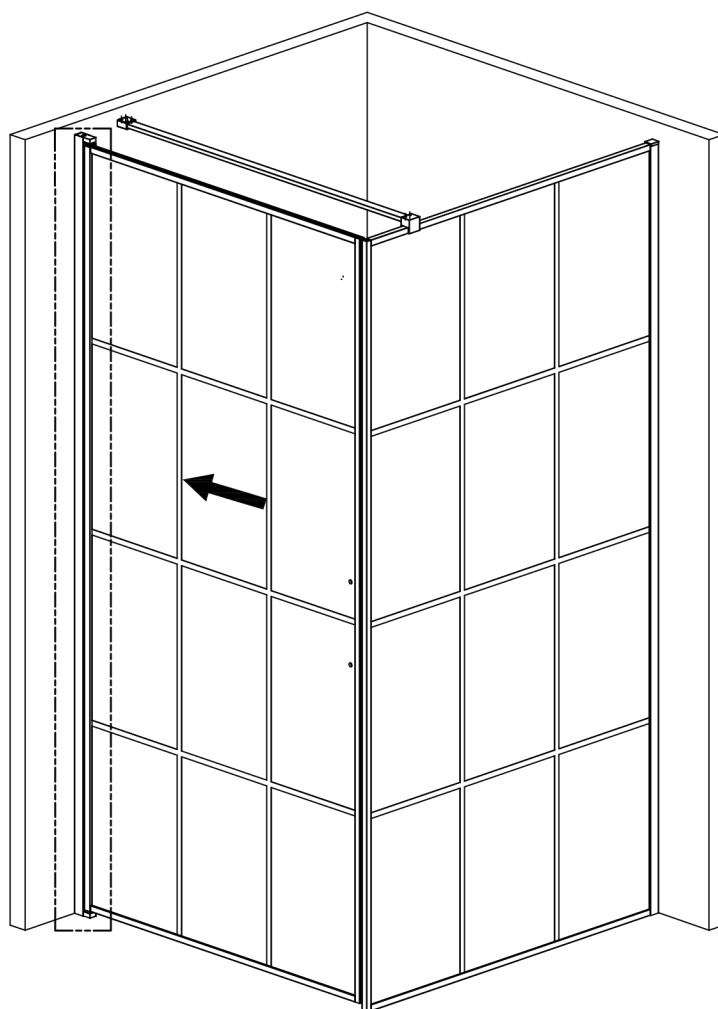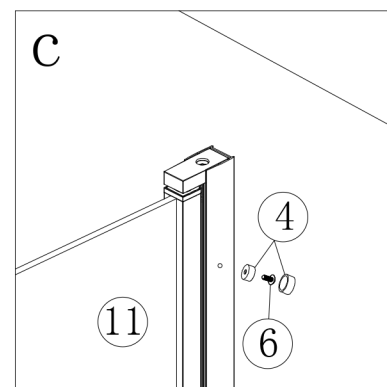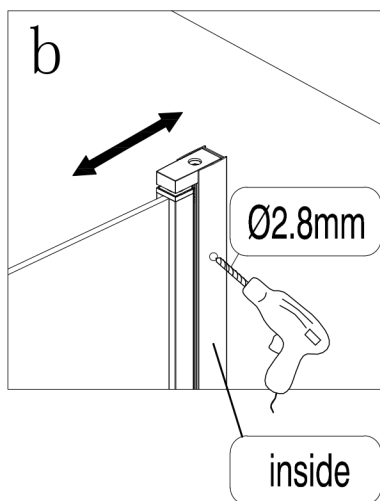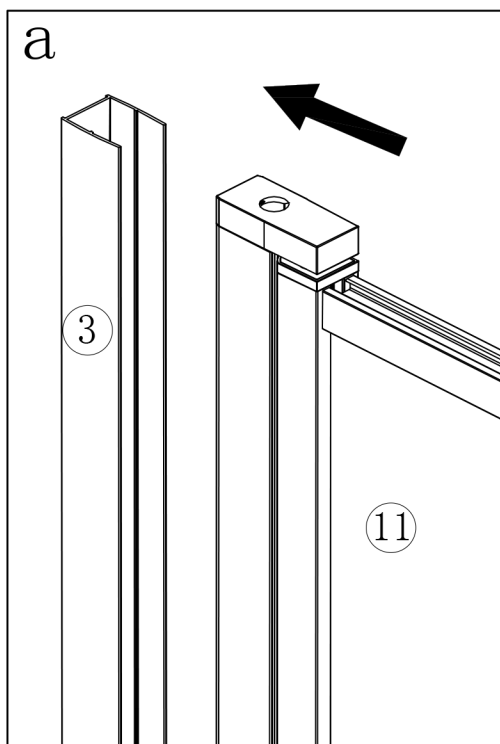

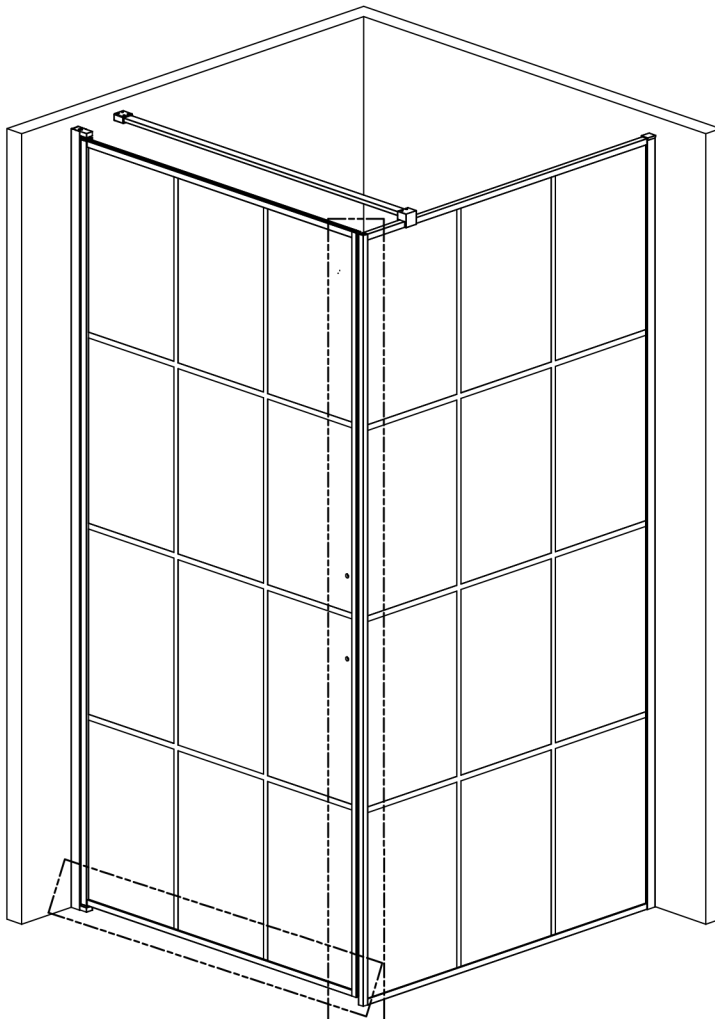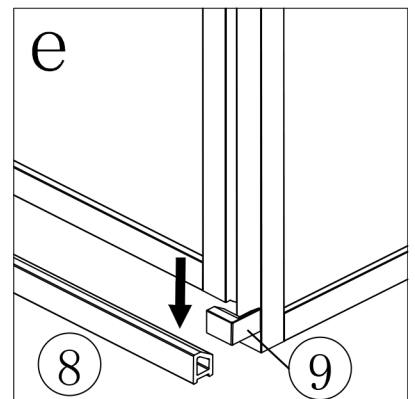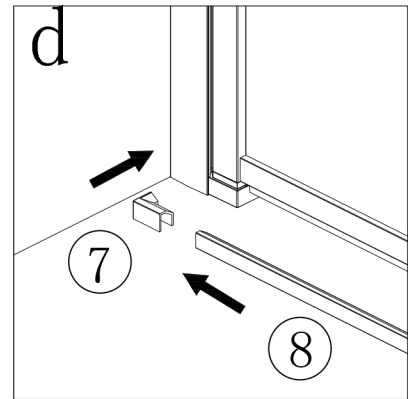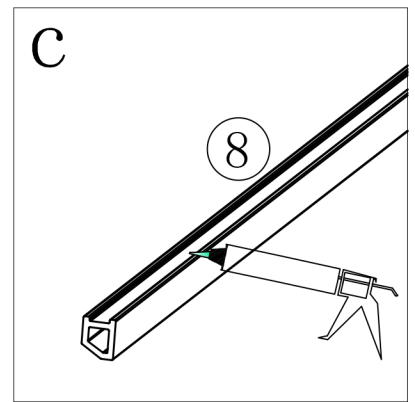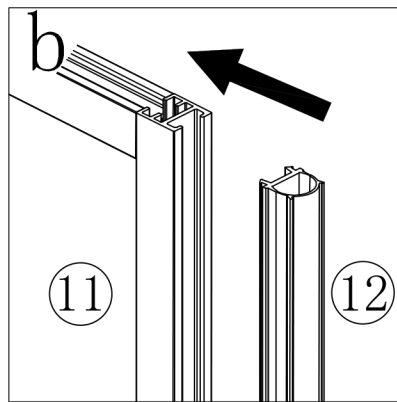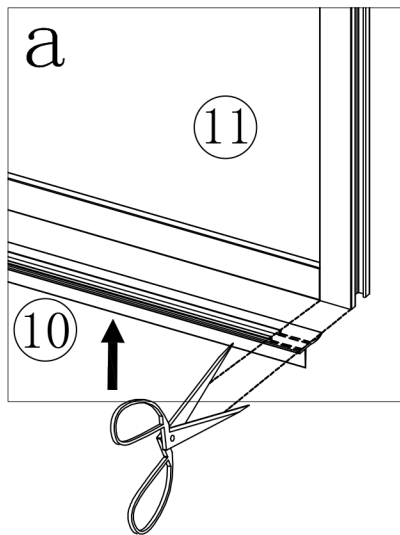

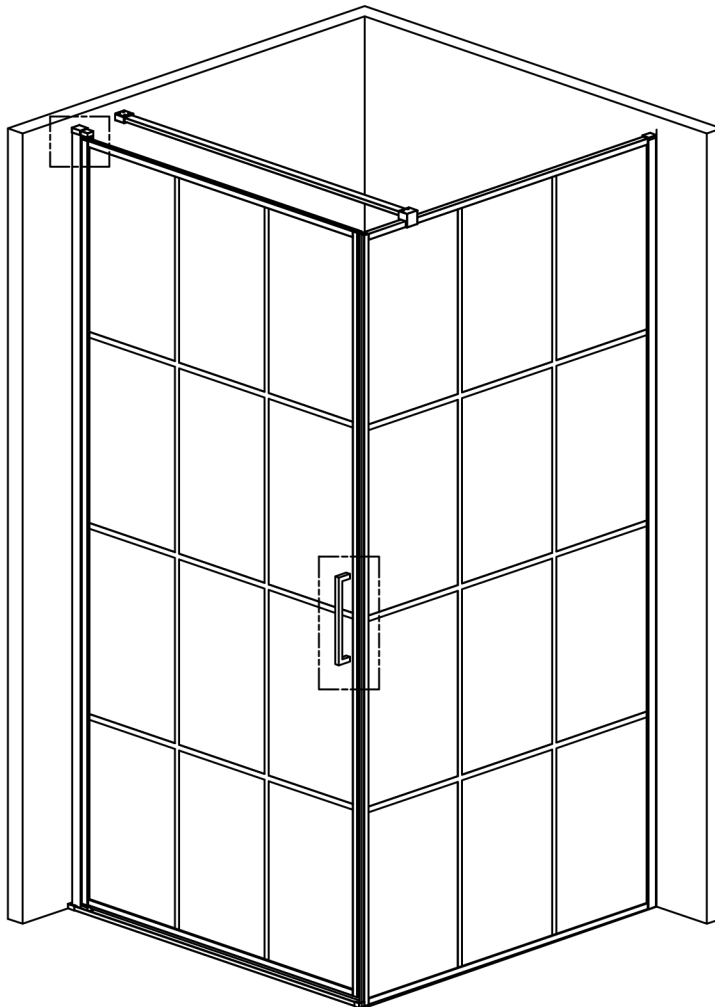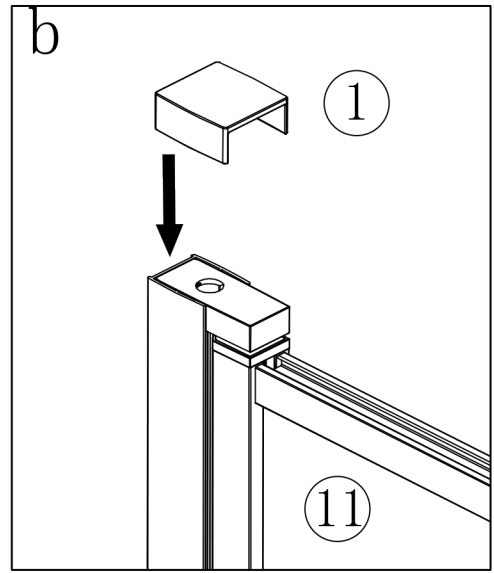
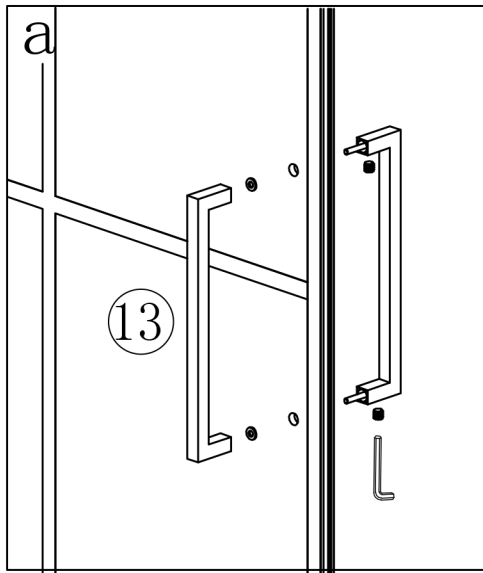



EXTERNALLY SILICONE SEAL THE WALL PROFILE WHERE IT MEETS THE WALL AND ALONG THE BOTTOM OF THE GLASS. ALL IN A CONTINUOUS BEAD. DO NOT SILICONE INSIDE THE ENCLOSURE


ALLOW THE SILICONE AT LEAST 24 HOURS TO FULLY CURE.






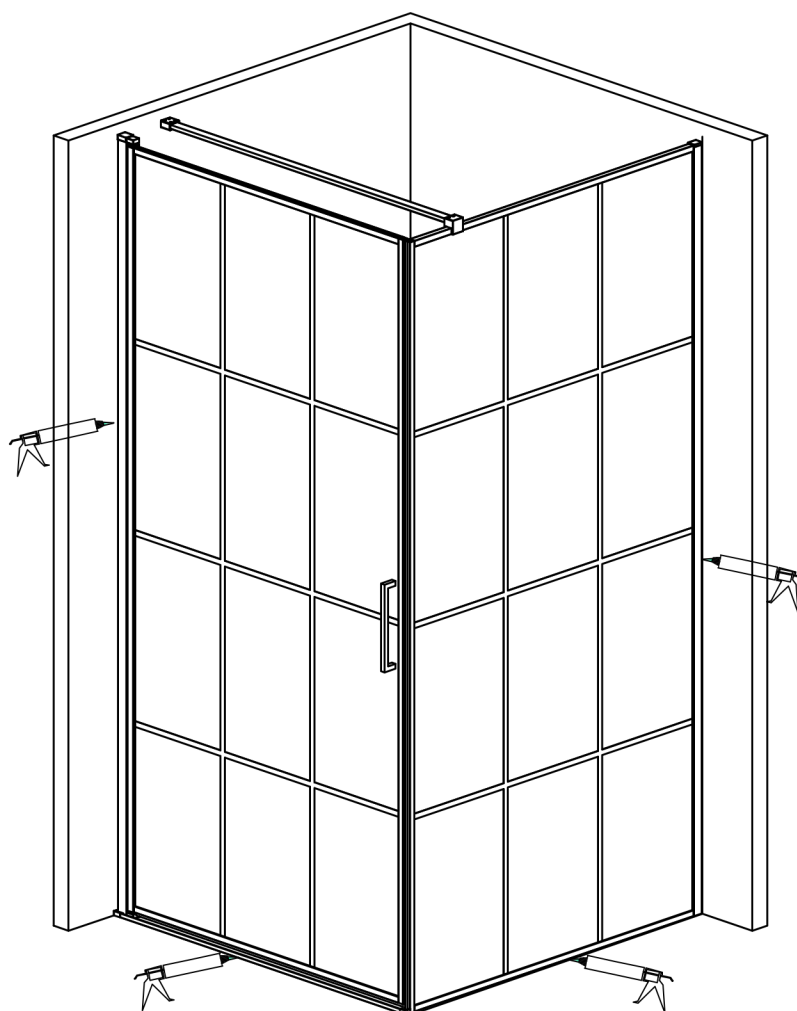

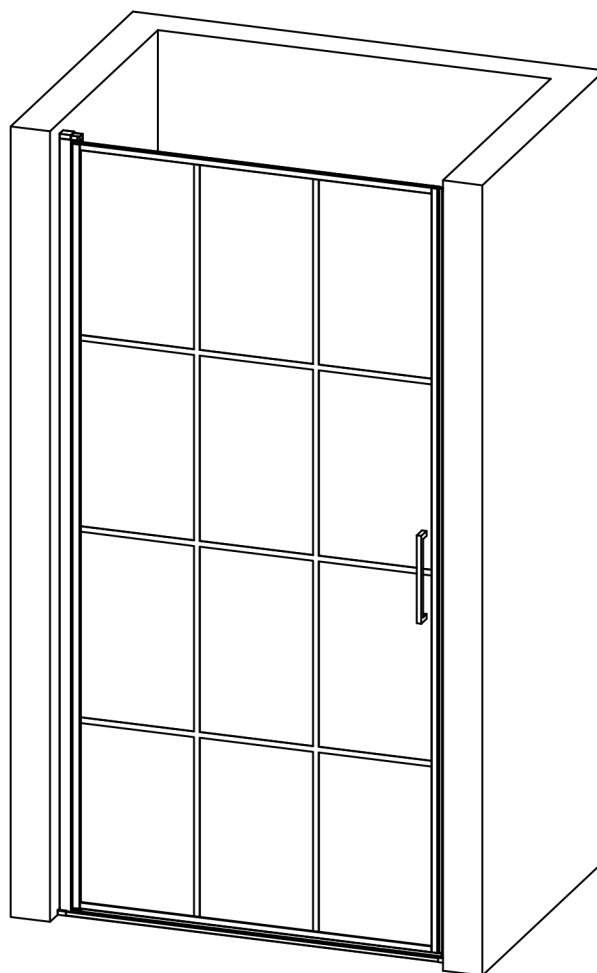

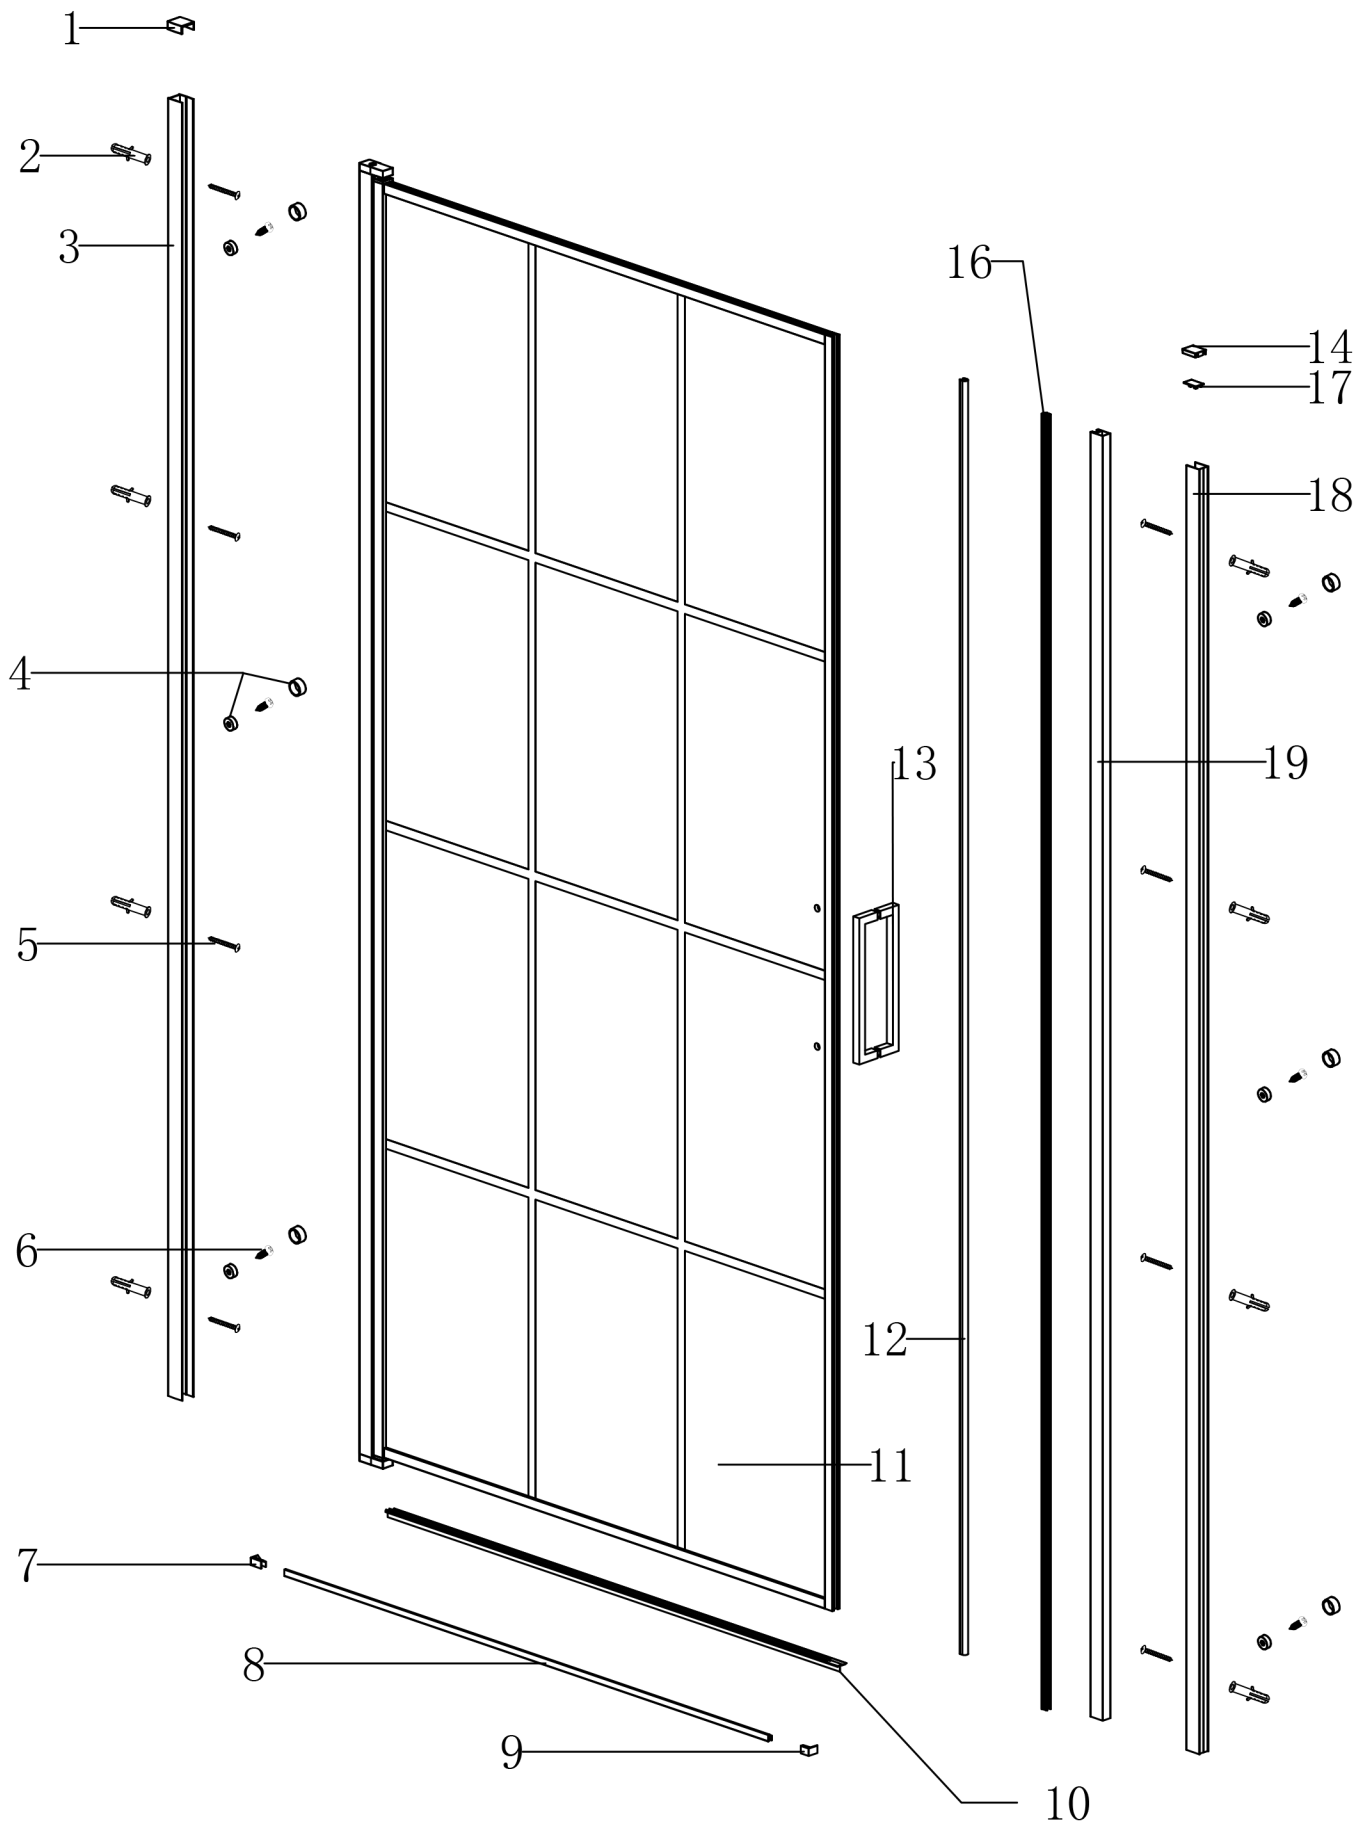






AFTERCARE - ENSURE YOU CLEAN YOUR PRODUCT USING A MILD DETERGENT DILUTED IN WATER, REMOVING ANY RESIDUE WITH A SOFT DAMP CLOTH.




MAINTENANCE - ENSURE MOVING PARTS ARE FREE FROM ANY DEBRIS OR SOAP BUILD UP




















serial number	graphical	name	quantity	remarks
1			1 PCS	
2		Ø6	8 PCS	
3			1 PCS	
4			6 PCS	
5		ST3.9X35	8 PCS	
6		ST3.5X9.5	6 PCS	
7			1 PCS	
8			1 PCS	
9			1 PCS	
10			1 PCS	
11			1 PCS	
12			1 PCS	
13			1 PCS	
14			1 PCS	
15		2.5mm	1 PCS	
16			1 PCS	




serial number	graphical	name	quantity	remarks
17			1 PCS	
18			1 PCS	
19			1 PCS	






Type	Size(mm)	Installation size(mm)	Entrance size(mm)
		A	
MBPD	700x1970	660-700	575±10
	800x1970	760-800	675±10
	900x1970	860-900	775±10
	1000x1970	960-1000	875±10


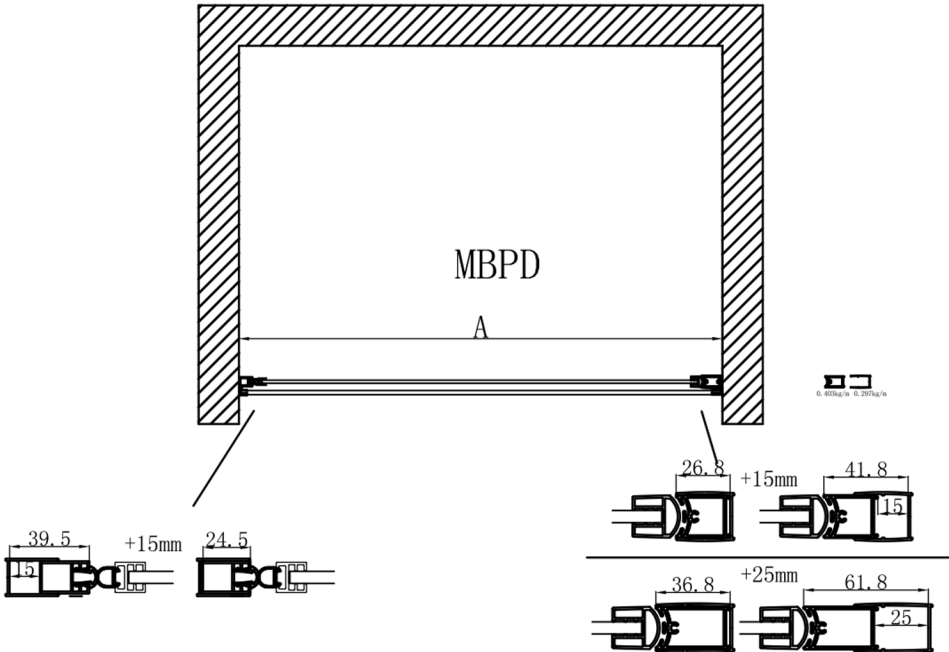
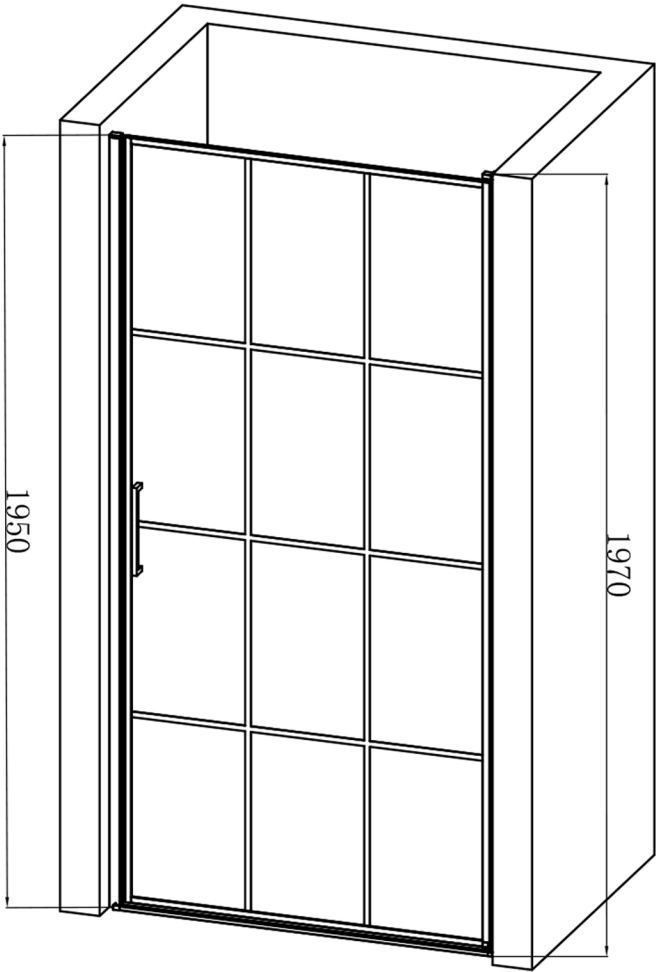


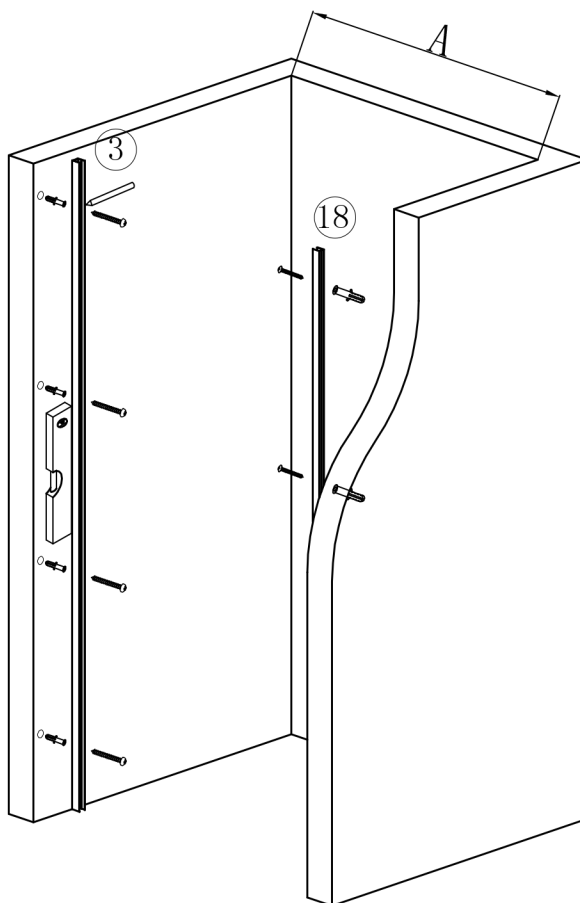

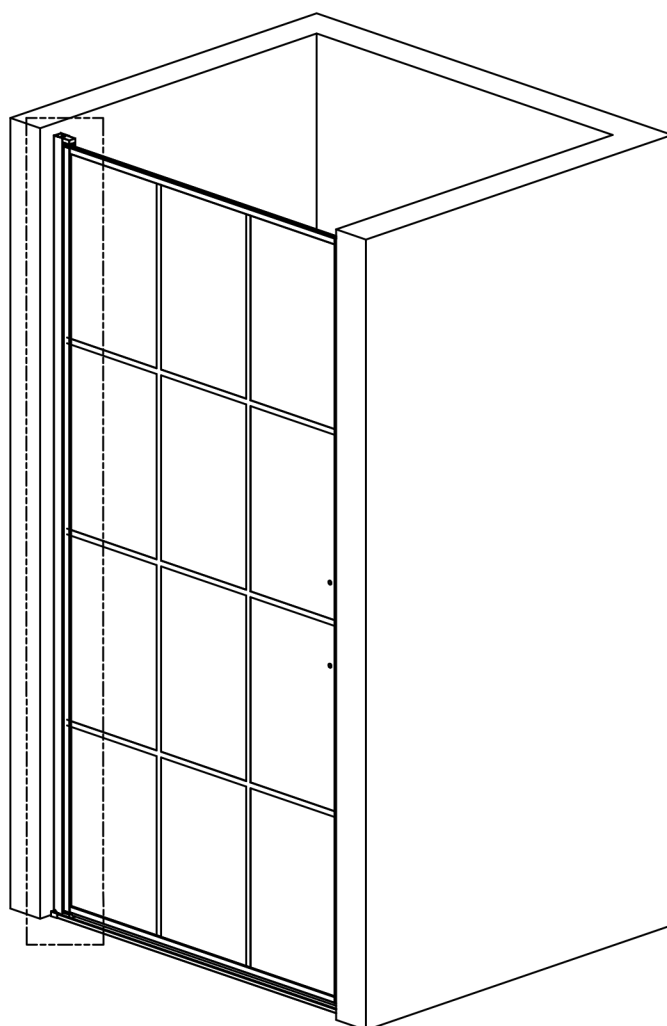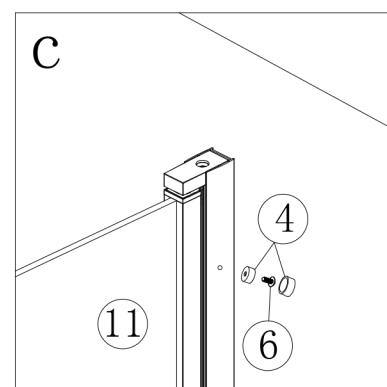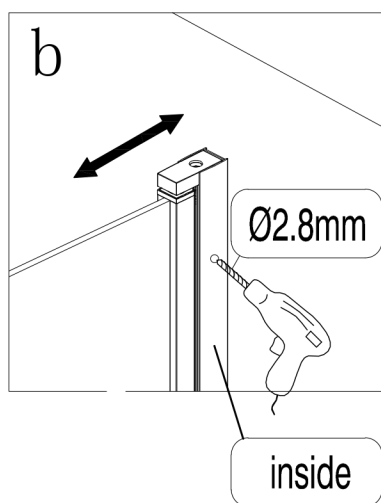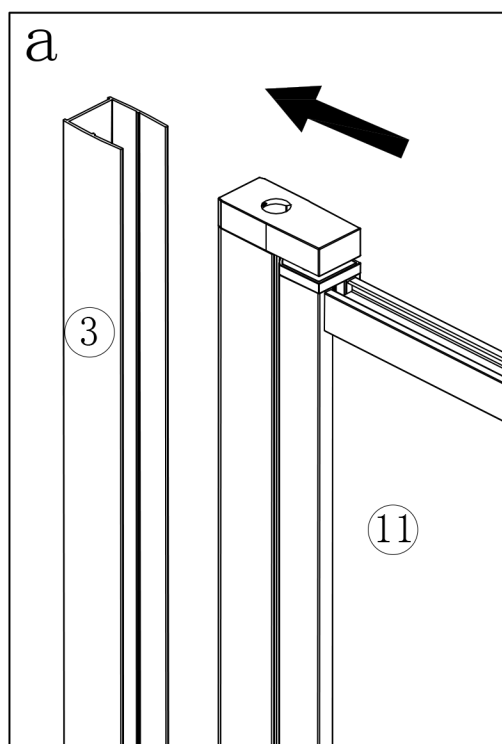






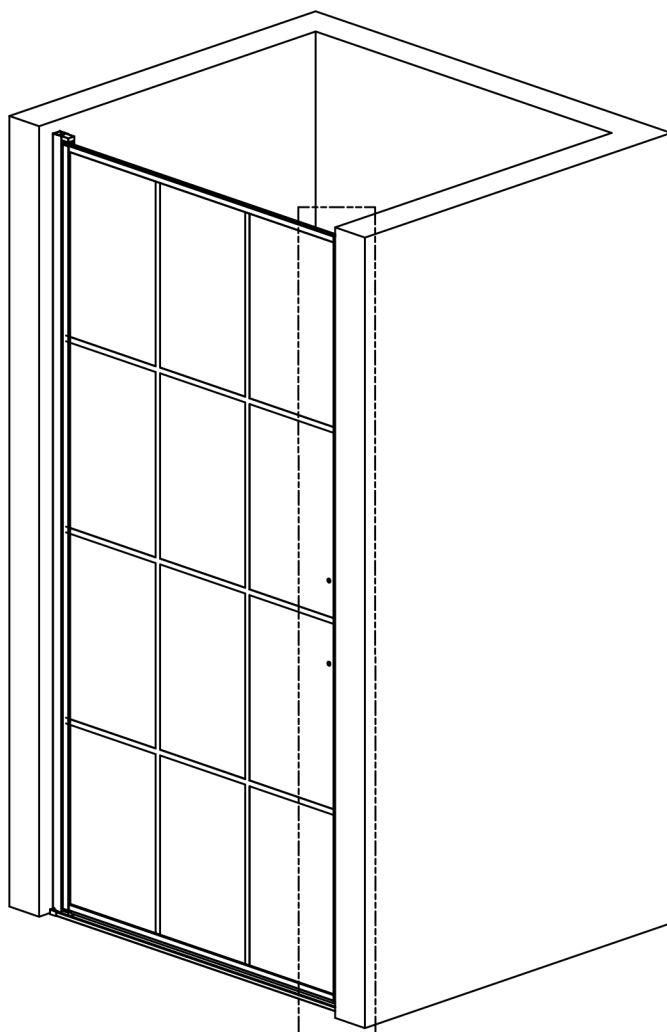
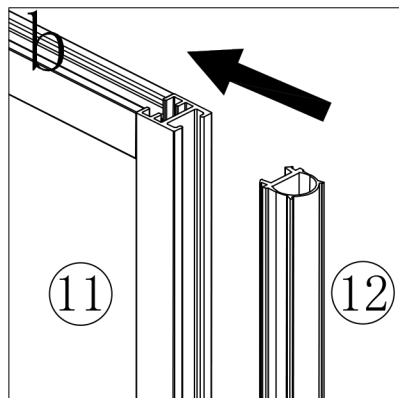
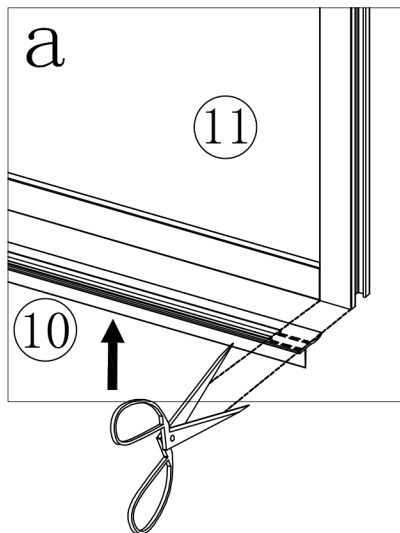


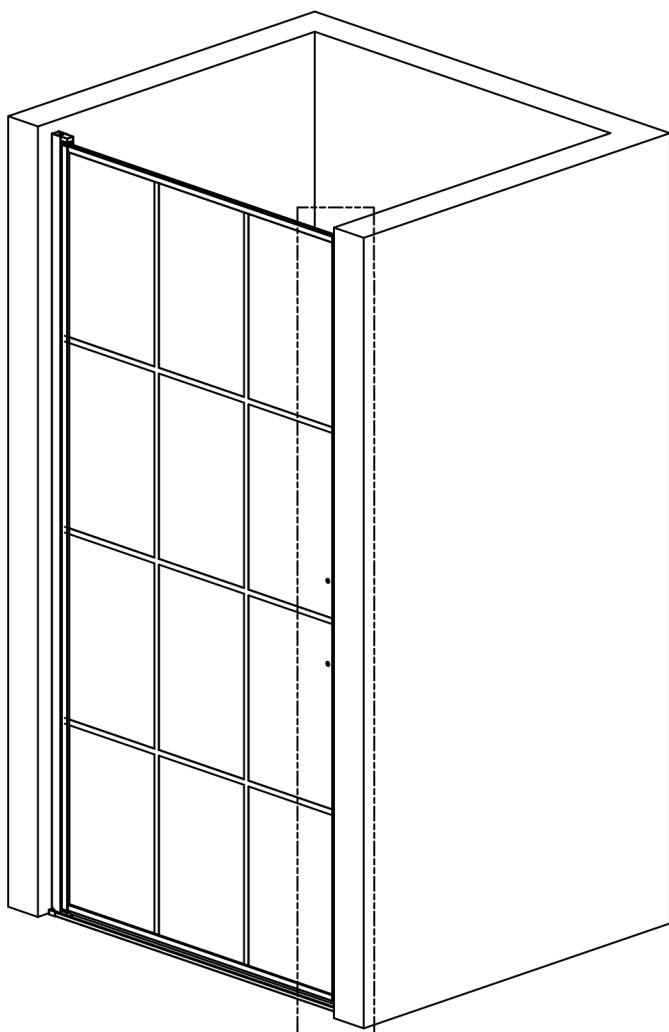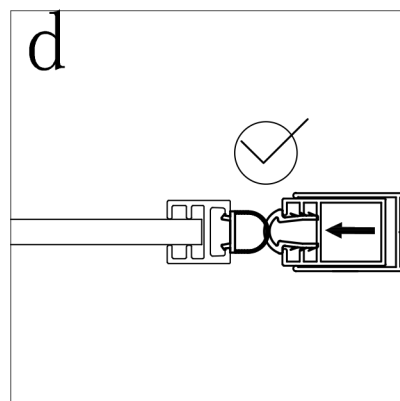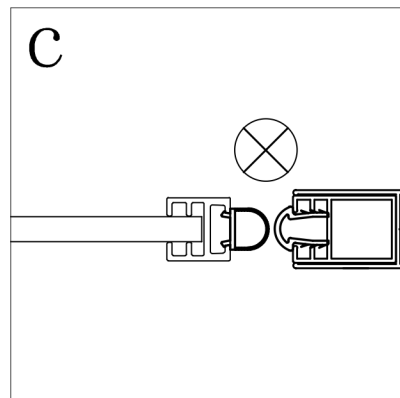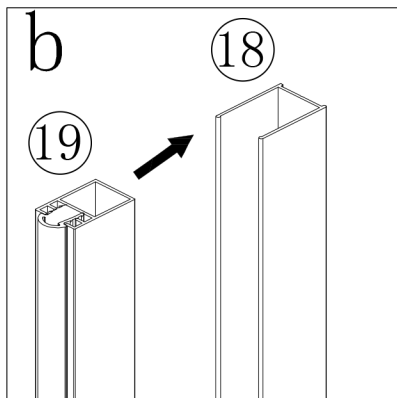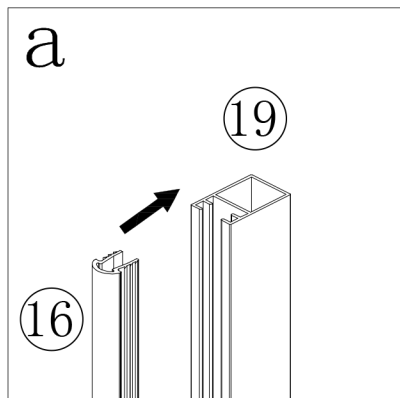

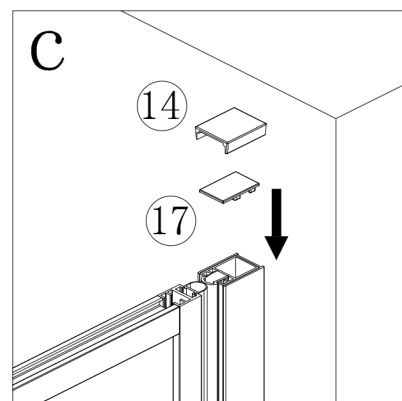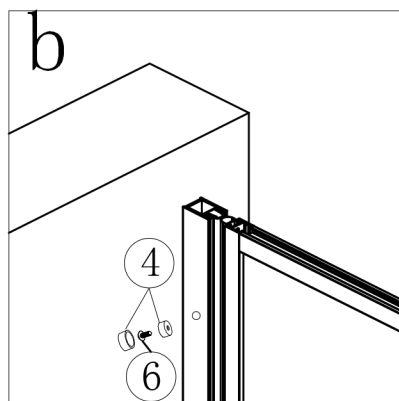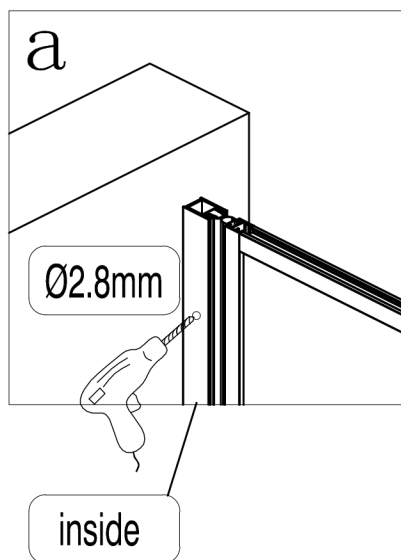

:

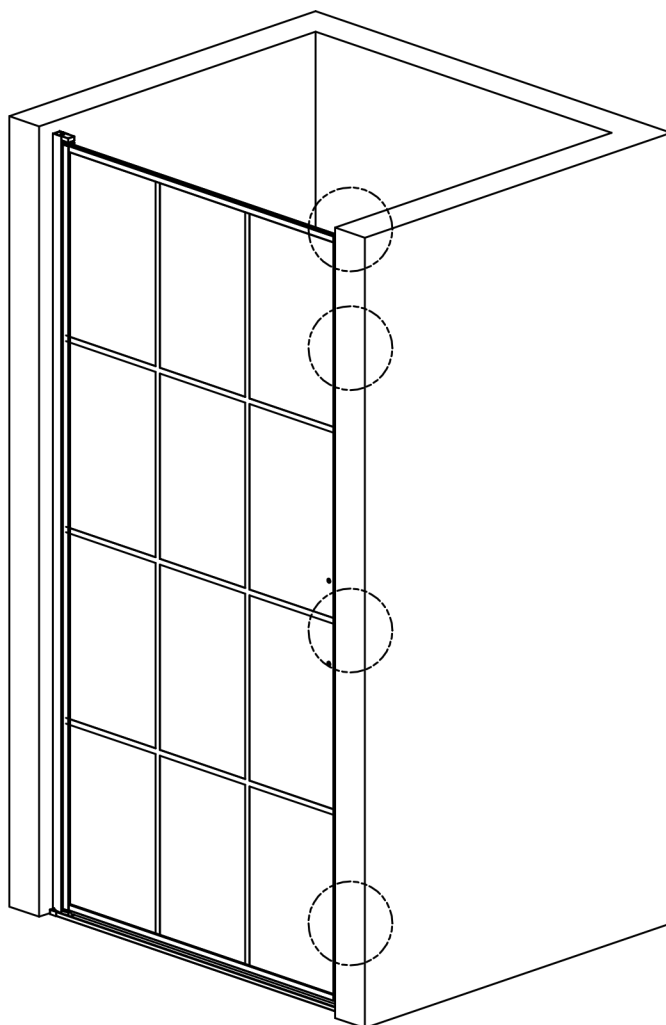

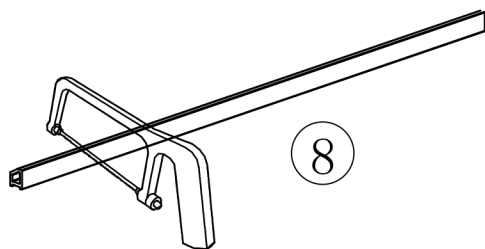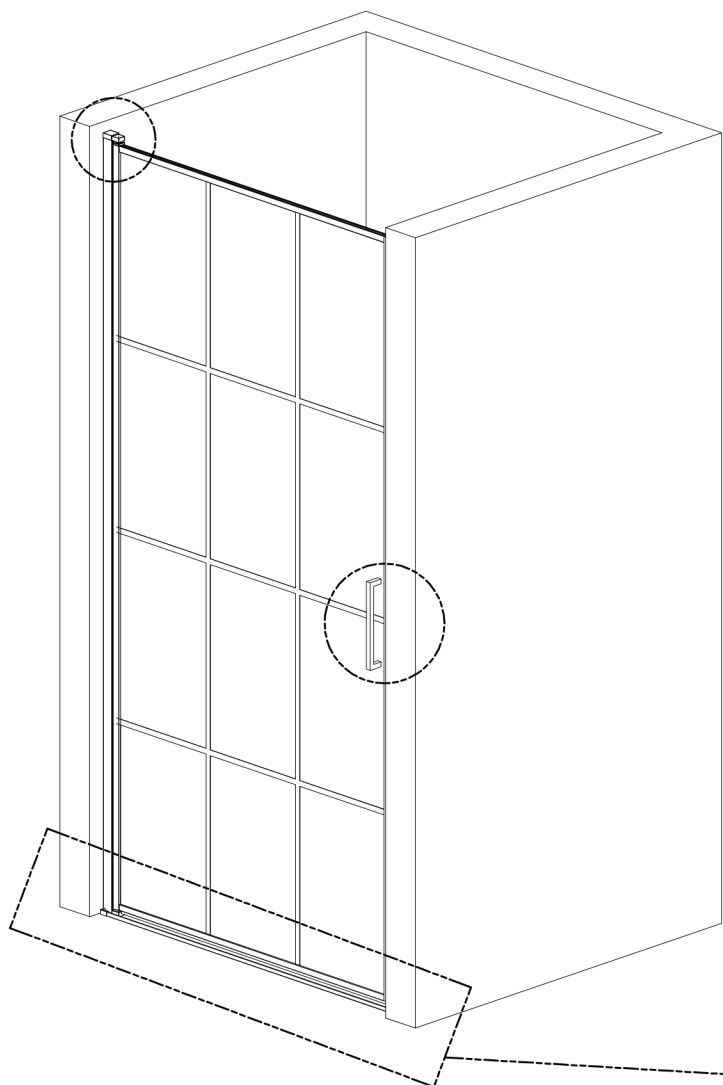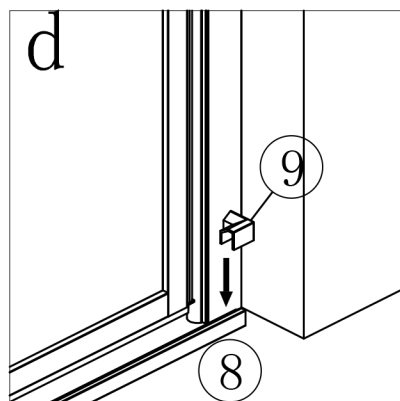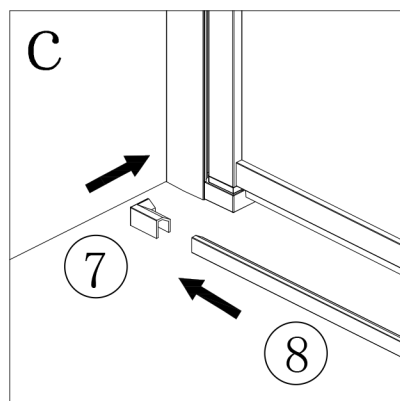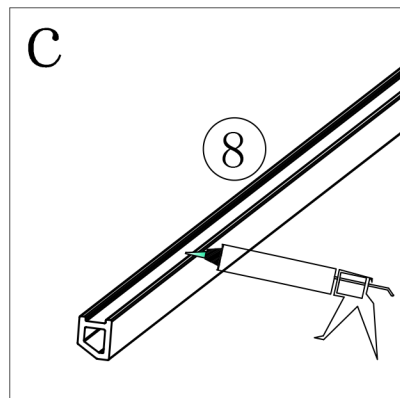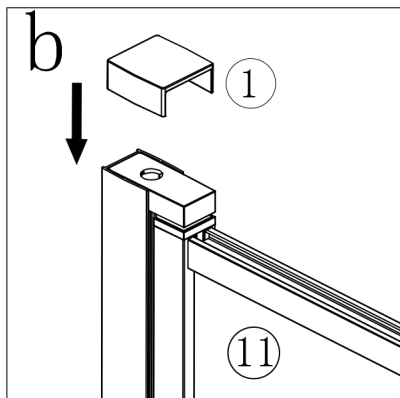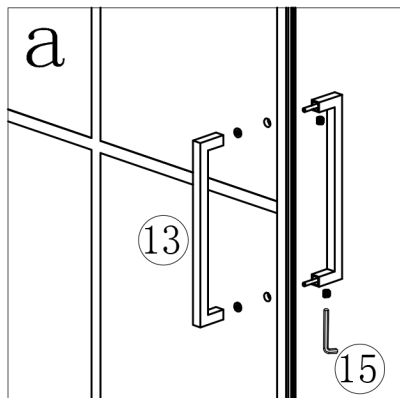

EXTERNALLY SILICONE SEAL THE WALL PROFILE WHERE IT MEETS THE WALL AND ALONG THE BOTTOM OF THE GLASS. ALL IN A CONTINUOUS BEAD. DO NOT SILICONE INSIDE THE ENCLOSURE

ALLOW THE SILICONE AT LEAST 24 HOURS TO FULLY CURE.

AFTERCARE - ENSURE YOU CLEAN YOUR PRODUCT USING A MILD DETERGENT DILUTED IN WATER, REMOVING ANY RESIDUE WITH A SOFT DAMP CLOTH.

MAINTENANCE - ENSURE MOVING PARTS ARE FREE FROM ANY DEBRIS OR SOAP BUILD UP

