




**Tools required:**

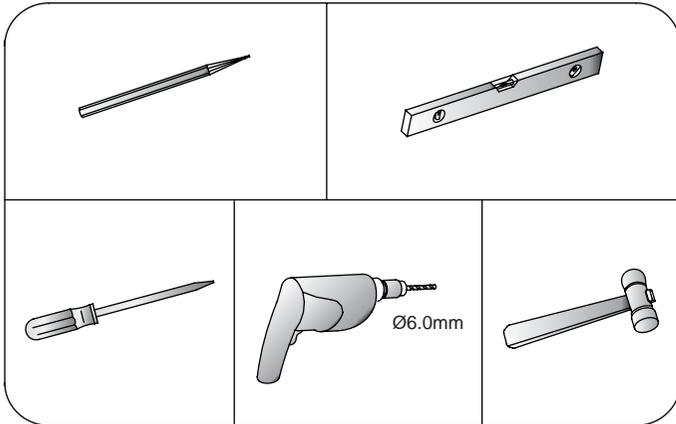


**Parts supplied:**

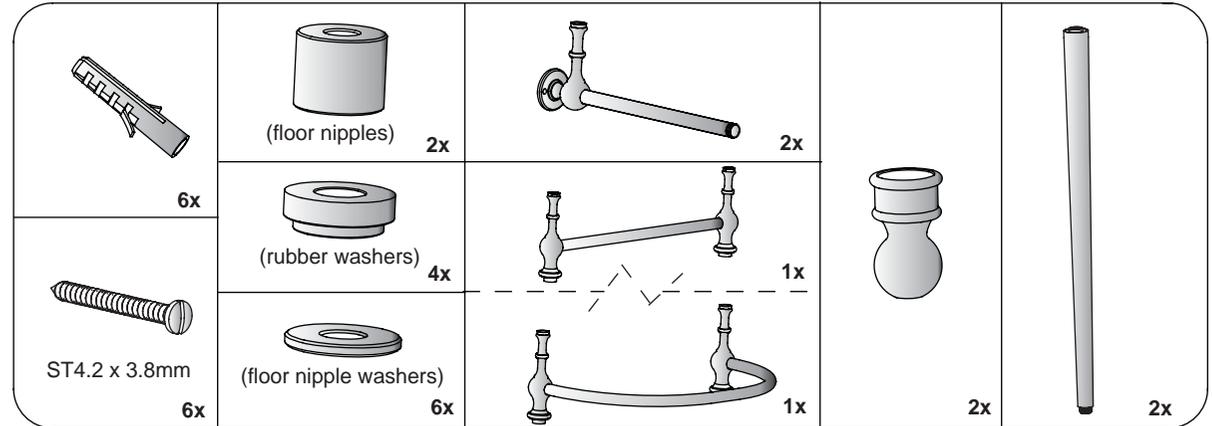


**1** Attach the two horizontal rails to the front rail.

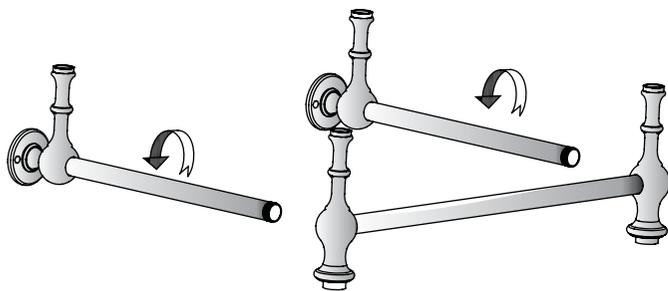

**2**




**3** Screw the legs into the rail.

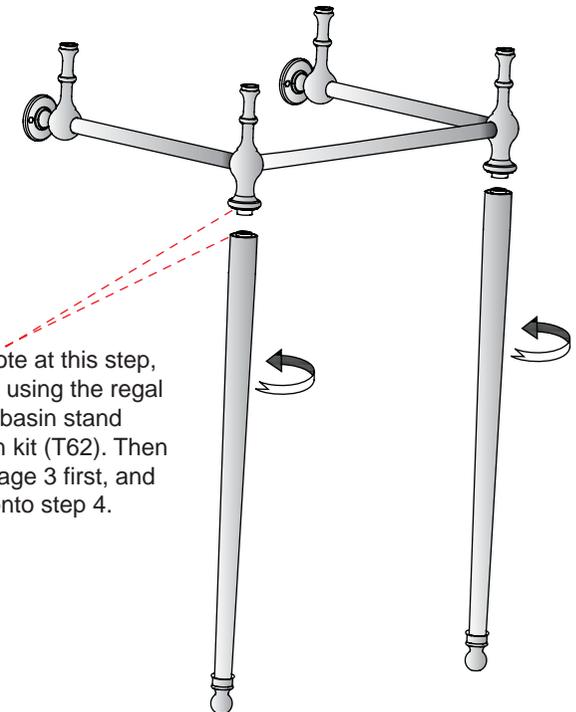


Please note at this step, if you are using the regal designer basin stand Extension kit (T62). Then refer to page 3 first, and then go onto step 4.


- 4** Check that the horizontal bracket bar is vertical using a spirit level.

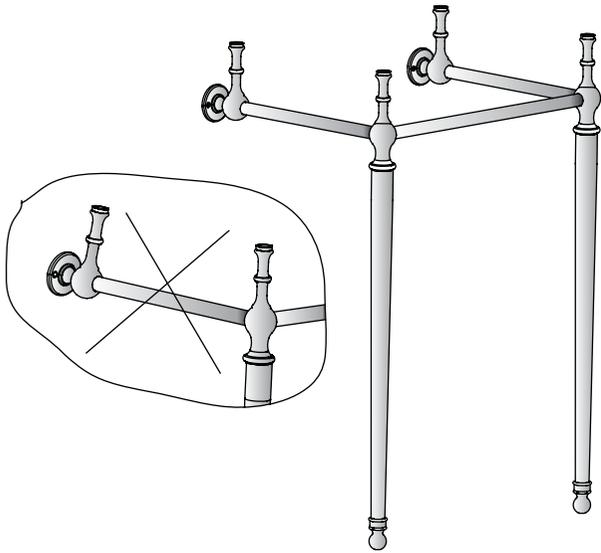


- 5** Determine the final installation position and mark the 4 wall and two floor fixing hole positions in pencil. Please make sure to include the floor nipples (and washers if necessary) when determine the installation position because the stand may elevate after the floor nipples are fitted.

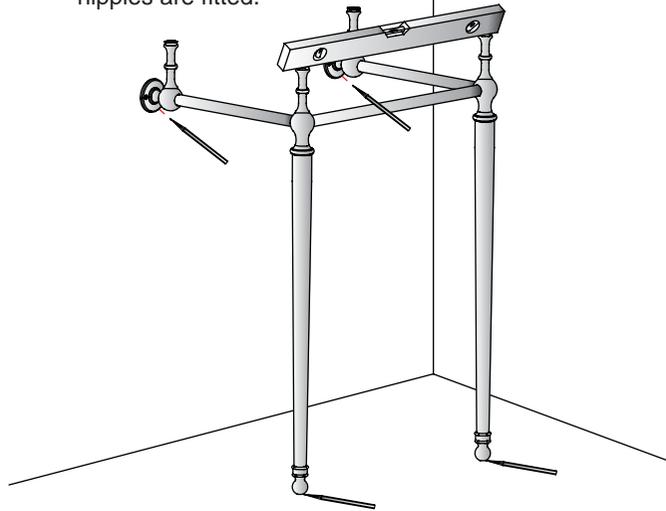


- 6** Using a 6mm drill bit drill the six holes on the marked positions (note: In the event that the wall / floor fixings supplied being inappropriate for the wall / floor, please source alternatives).

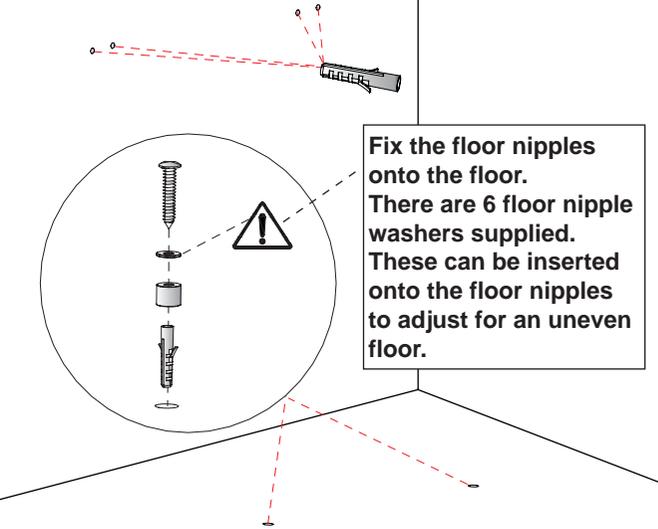


- 7** Fit the two legs over the floor nipples.

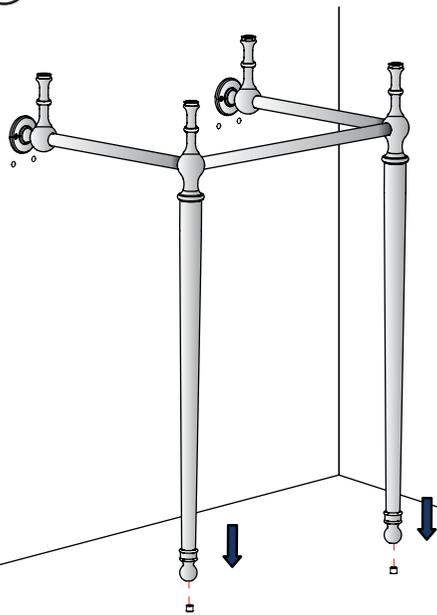


- 8** Fix each of the two brackets onto the wall using the 4 screws provided. Ensure that the screw heads are parallel to the floor. Place the 4 rubber washers into the 4 recesses as shown.

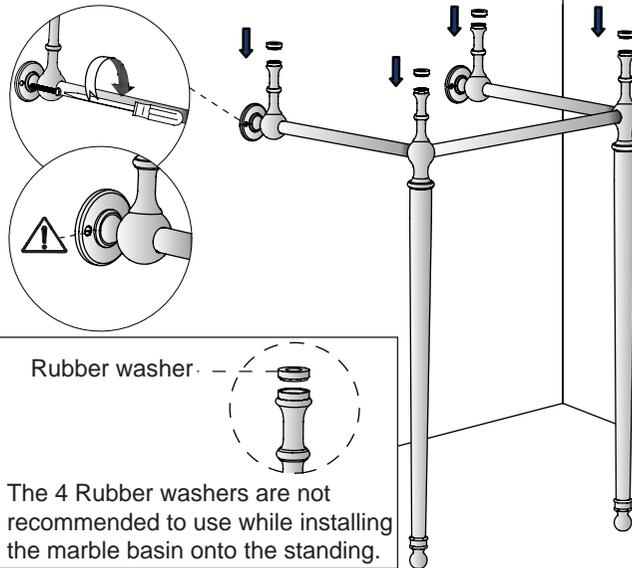


- 9a** For marble basin, please refer to the BASIN INSTALLATION INSTRUCTION.

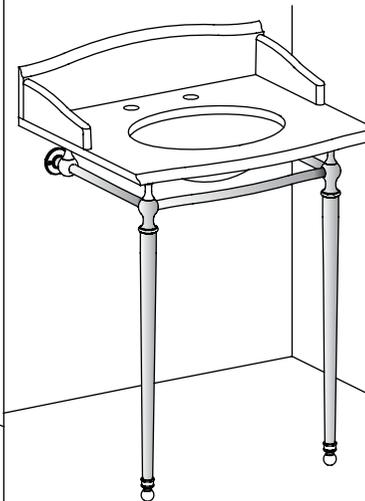


- 9b** For ceramic basin, place the basin in position ensuring that it is level. The basin must be fixed to the wall at the rear using appropriate wall screws.

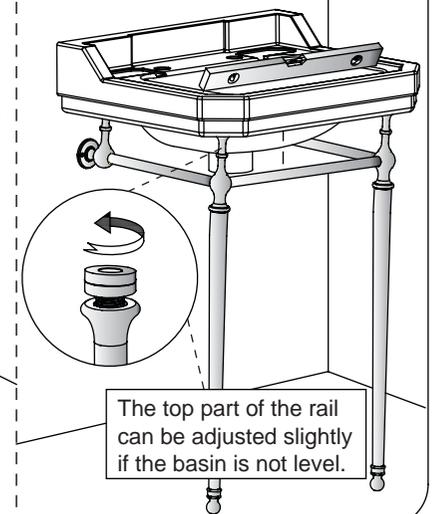


**Parts supplied:**

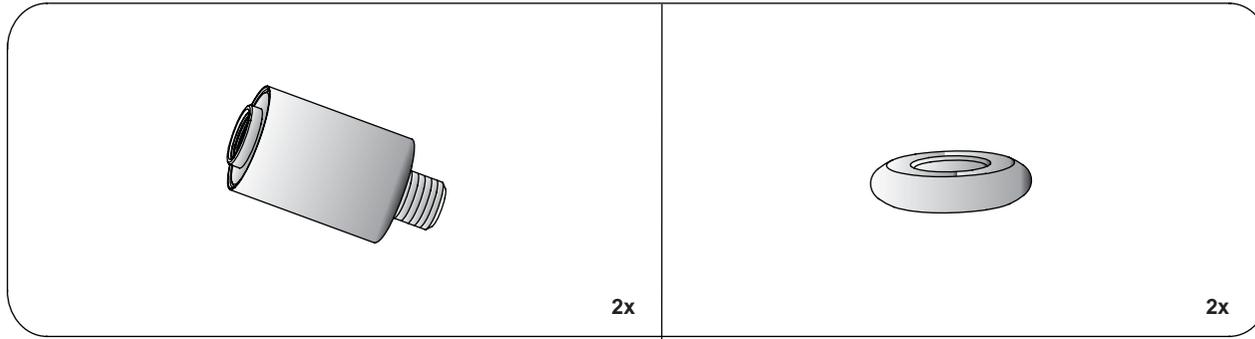


Please refer to the basin stand instruction for the more detail basin stand installation.

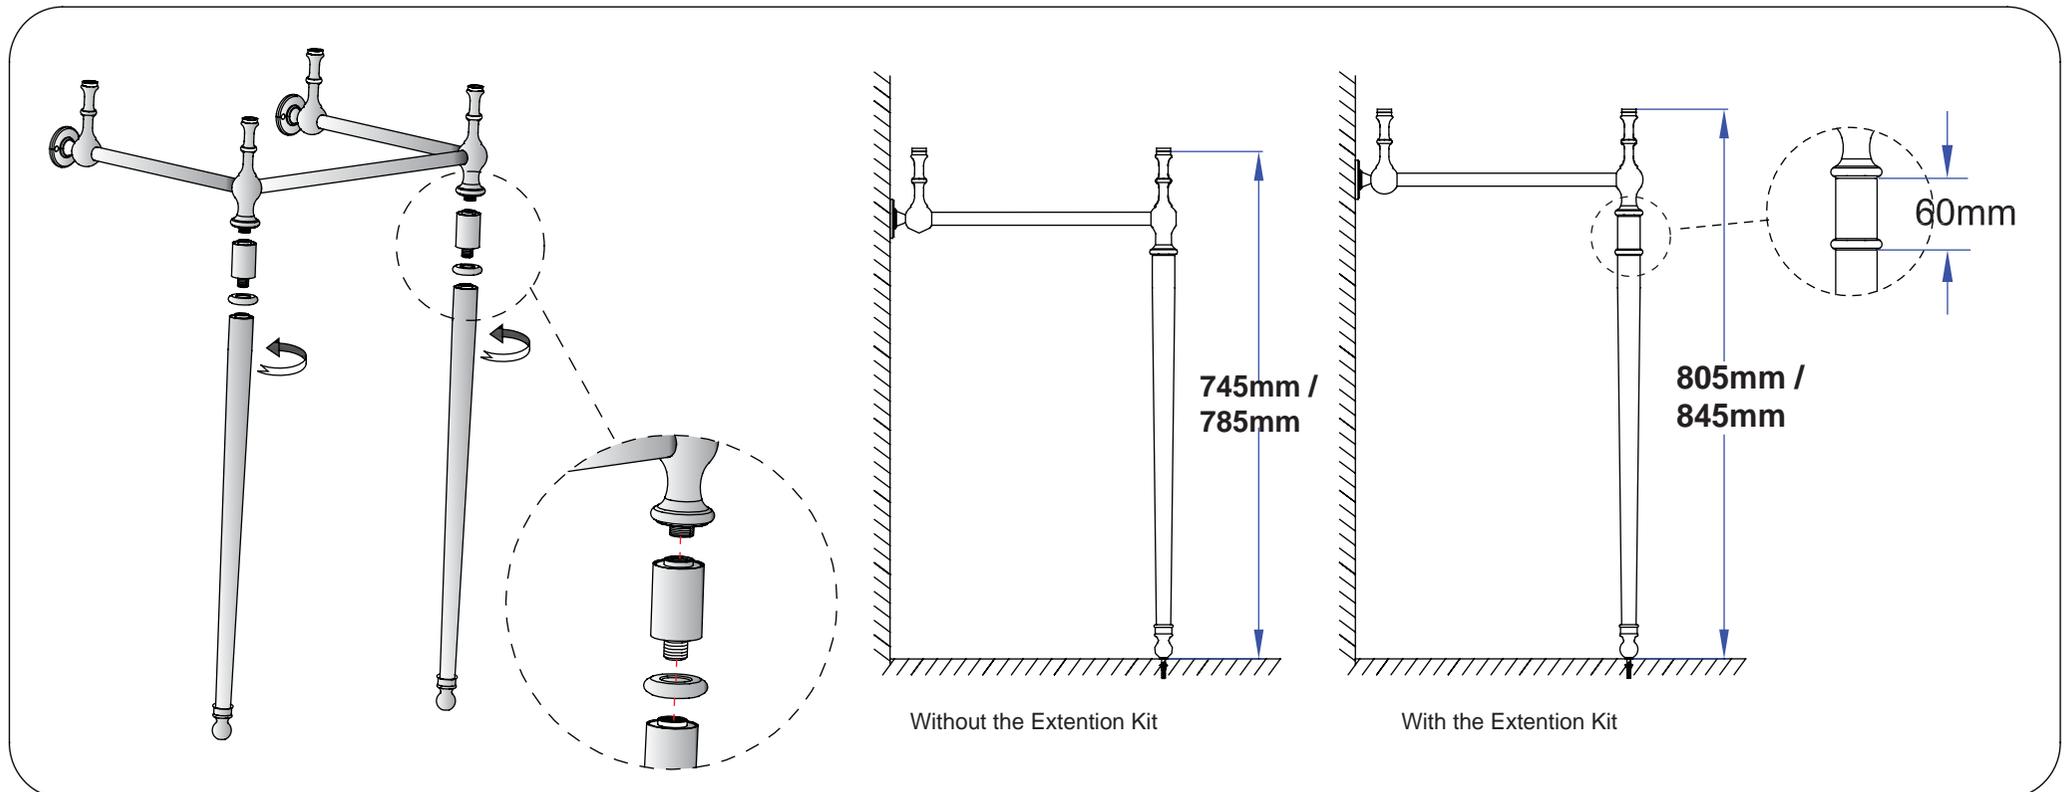


**Parts supplied:**

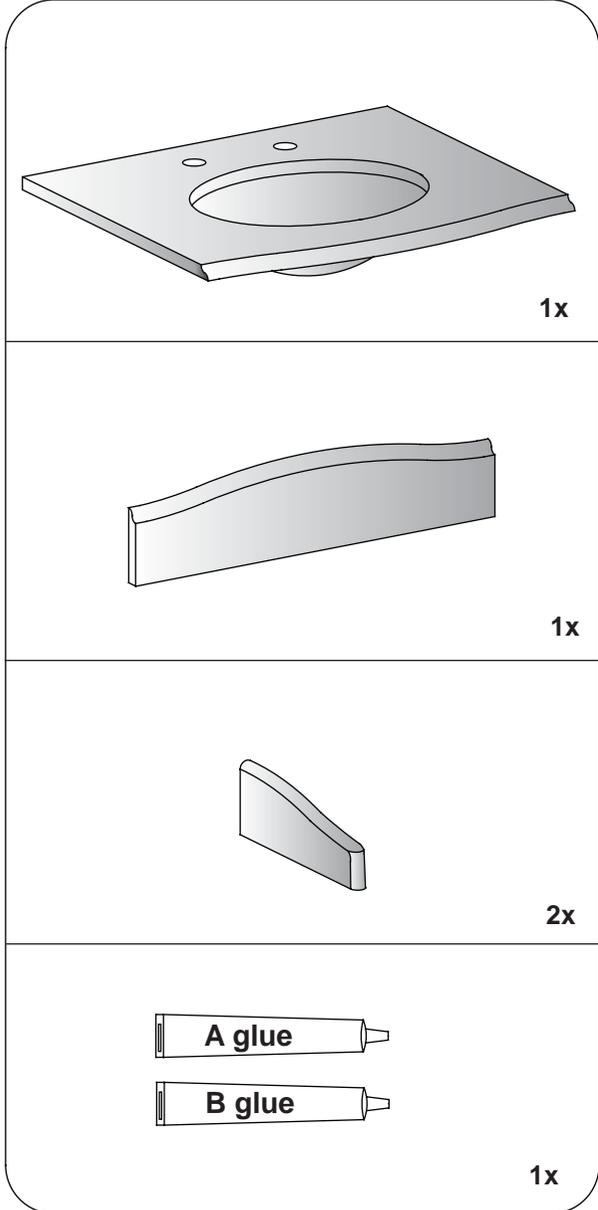


**1** Place the basin in position and use the adjustable brackets (1A) to level. Use a spirit level to ensure the worktop is level. Attach the AB glue into the 4 bracket heads (1B). Reposition the basin and apply gentle pressure with the base of your hand, final level the basin.

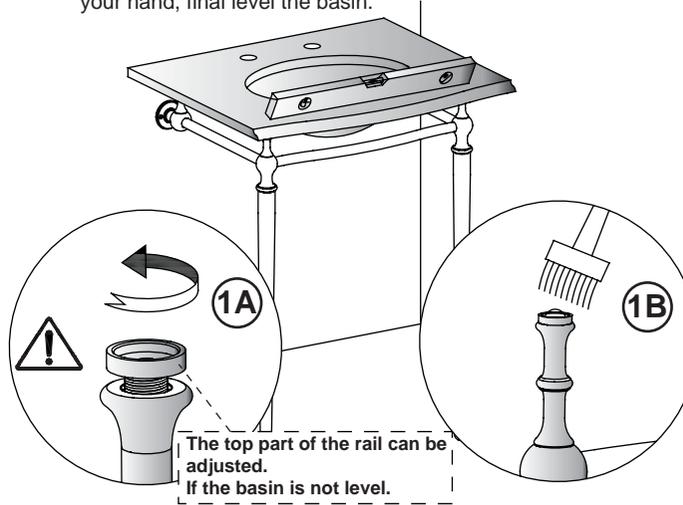


**2** Spread the AB glue on the bottom & back of the rear splash back (2A), push the rear splash back into position. Repeat, if necessary with the side splashes (2B).

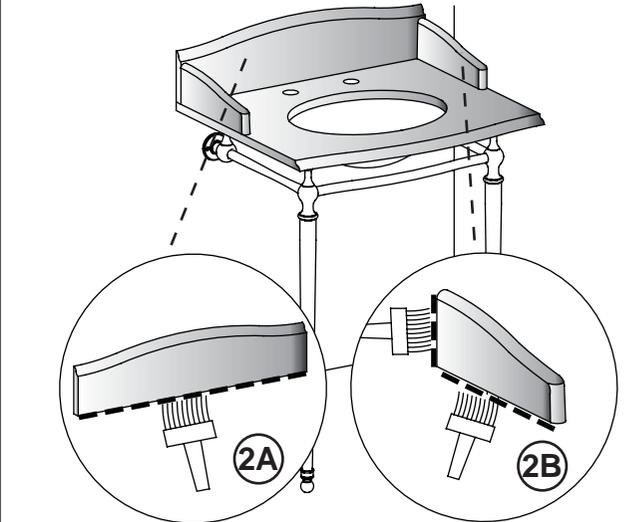

**1** Spread the AB glue on the top surface of the basin stand. Position the basin and apply gentle pressure with the base of your hand, final level the basin.

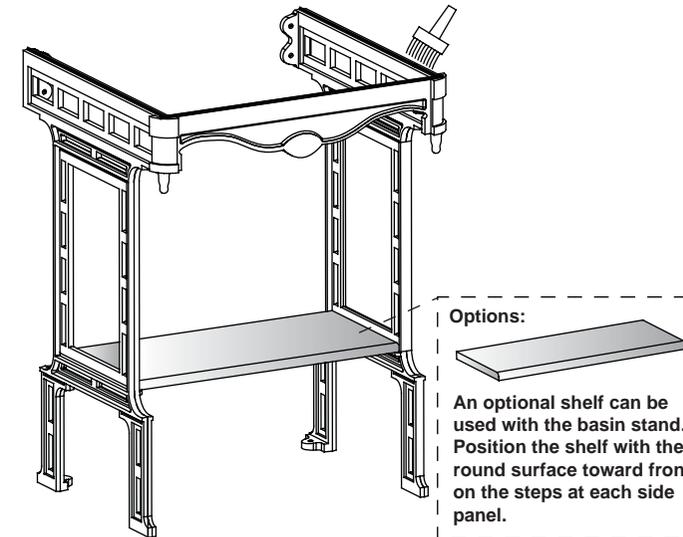

**2** Spread the AB glue on the bottom & back of the rear splash back (2A), push the rear splash back into position. Repeat, if necessary with the side splashes (2B).

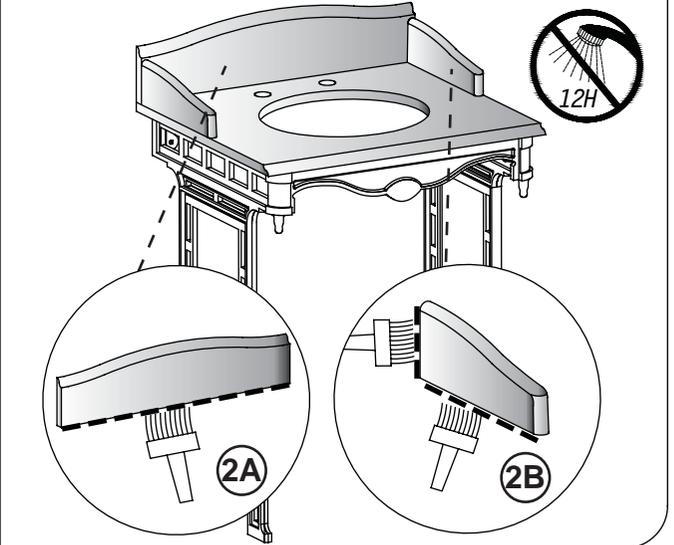

## GRANIT/MARBLE CARE & MAINTENANCE

**Your new granite/marble vessel top has been factory sealed and polished to a smooth glass finish. In order to maintain the surface and keep it looking fresh and natural, we recommend the following procedures:**



- For routine maintenance and cleaning, you should clean the granite/ marble at least once a week or more frequently with warm soapy water.
- Liquid spills, such as alcohol, medications, etc should be cleaned up promptly. Some liquids with high-acid content can etch granite/marble surfaces if left for any length of time.
- Popular products that should be promptly cleaned up are: shaving cream, toothpaste, perfume, cologne, nail polish remover, hair coloring and perm products, shampoo, drain opener, and toilet bowl cleaner.
- Place protective pads on the bottoms of any heavy objects, such as pottery, appliances, or other objects that may scratch the granite/marble surface.
- Avoid abrasive cleaners or rough cleaning pads. If necessary, a soft buffing pad can be used.
- Check the chemical content of your cleaning products to ensure that they contain no laquer removing chemicals.
- Use coasters under drinking glasses to prevent glass rings on the surface.
- Do not stand on the granite/marble top to fix overhead lights or other items. Do not place extremely heavy items on the top.