




CAPALLI - 500

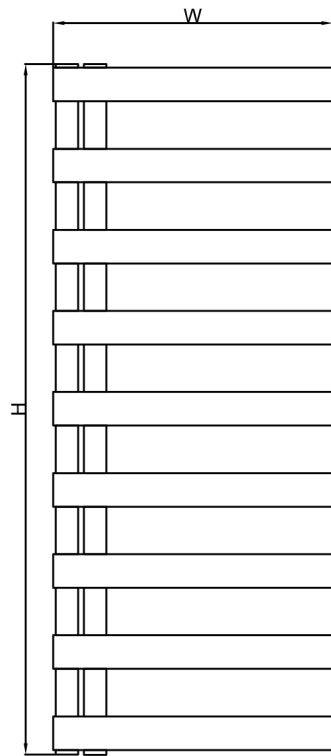


Front View

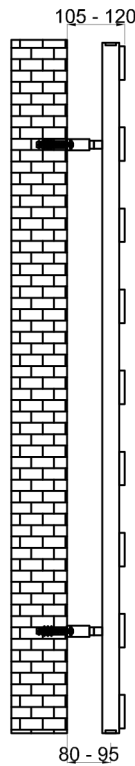

Side View

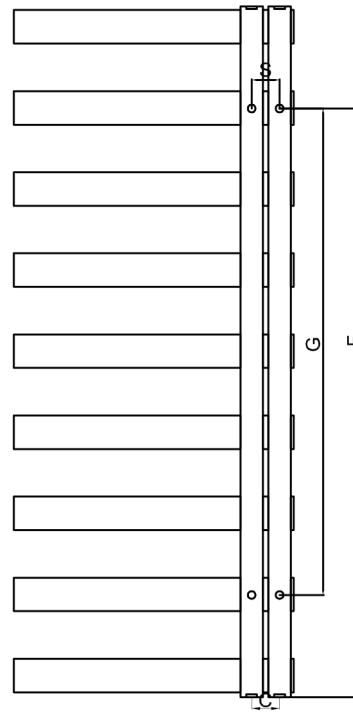

Back View

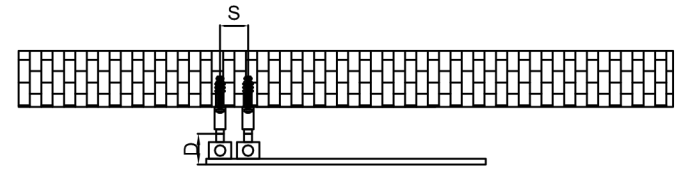

Top View

SUPPLIED INSTALLATION ACCESSORIES



SCREW 4 PCS



WALL PLUG 4 PCS



BRACKET 4 PCS




GRAB SCREW 4 PCS



ALIEN KEY 1 PCS

MATERIAL DETAILS



-Vertical Mounting
-Optional 304 QUALITY STAINLESS STEEL TOWEL RADIATOR: (RNS-CPL5123P : CAPALLI RADIATORS)
-POLISHED
-Max Operational Pressure: 10 Bar
-Inlet/Outlet: 1/2" Female Pipe Thread
-All Dimensions are in mm

Product Name	Product Code	Height	Width	Thickness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger to Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
		H	W	D	C	S	F	G	-	-	Watt - BTU/hr (Δ50°)
		mm	mm	mm	mm	mm	mm	mm	L	kg	
CAPALLI 800 X 500	RNS - CPL5080P	800	500	55	50	50	617.5	435	1.95	5.60	305 - 1040
CAPALLI 1235 X 500	RNS - CPL5123P	1235	500	55	50	50	1052.5	870	3.00	8.45	466 - 1589

REINA