

Tools & equipment needed: Drill, 8mm Suitable drill bit, Phillips screwdriver, Spirit level, Ruler/tape measure, Pencil, Silicone sealant (clear).

⚠ IMPORTANT - Advice and safety - Please read before installation

Please read these instructions carefully before starting installation and keep in a safe place for future reference. ENSURE the room is well heated and ventilated.

Check the contents of the pack carefully before installation. Bauhaus will not be held responsible for any de-fit / re-fit costs where faulty product has been fitted.

If any fault is found with materials or workmanship, it must be reported immediately to the manufacturer. Remedial action will be taken, based on information received, on condition that: 1. Full details are supplied to the manufacturer; 2. The product has not been modified or tampered with; 3. The manufacturer is informed of any damage/shortages prior to installation. 4. The product has not been installed, or attempts have been made to install.

We do not accept responsibility for any problems that may occur through incorrect installation.

⚠ Advice & Safety

This product should only be installed by a suitably qualified Plumber/installer. Should the installation be completed by a non-qualified person any product guarantee may be considered invalid. For a claim made under our warranty written certification of your installers qualifications can be required.

It is advised that all doors and drawers are removed prior to fitting to avoid unnecessary damage occurring.

It is recommended that the furniture and accessories are installed after tiling, ensuring that the product is installed flat to the tile face and allows product to be easily removed if required in the future.

These hints have been prepared for your guidance, you must exercise due care at all times.

Please note that some units are heavy. Always take care when lifting, and follow health and safety guidelines. It is recommended that 2 people carry out the installation of larger basin/vanity units.

Warning! Please check for any hidden pipes or electrical cables before drilling holes in the floor or walls.

When using power tools always follow the manufacturer's user instructions.

Always use the correct wall fixings for non-solid walls – not supplied.

Care & Cleaning

Clean furniture with warm clean water and microfibre cloth. Normal domestic cleaners that have no bleach or abrasive ingredients can be used to remove stubborn marks. Then wipe with fresh water, removing all traces of the cleaning agent, to prevent streaks forming and dry the surface with a clean microfibre cloth.

The manufacturer reserves the right to make technical modifications without prior notice.

Tower Unit Installation


Step 1

Remove door

Remove the door before installation.

a: Lift the tab (shown) on all hinges, to release.


b: Pull door back.

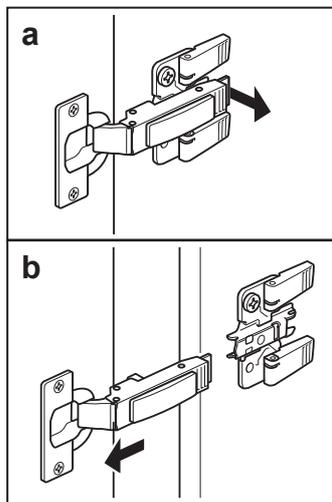

Step 2

Plan unit position


We suggest positioning the tower unit so it is level with any other units that have been installed.

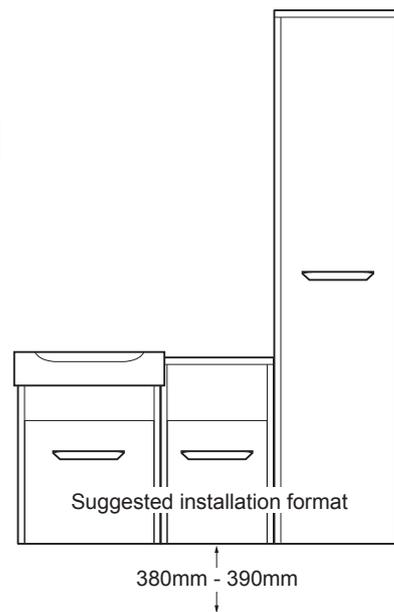

Step 3

Note: The Tower unit can be hung using one of two options, 'Hanging hooks' or 'Wall brackets' depending on your requirements and wall structure.

It is recommended to use the bracket option on non-solid walls.

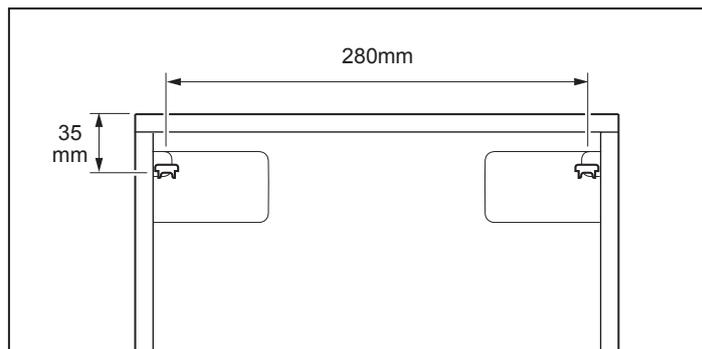


Option 1: 'Hanging hooks'

Use the measurements above, to position the 'hanging hooks'.

a: Mark the fixing hole positions onto the wall.

Drill \varnothing 8mm holes, insert the wall plugs and the 'hanging hooks'.

b: The 'hanging hooks' should protrude from the wall by 5-7mm. Position the unit on the hanging hooks.

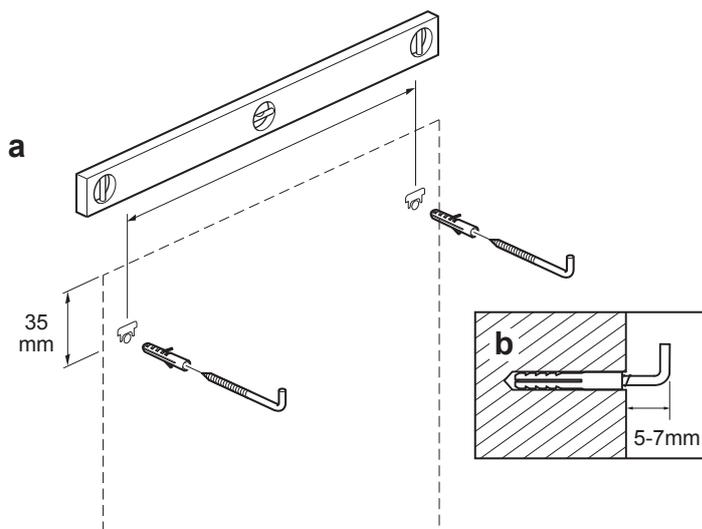

Option 2: 'Wall brackets'


Use the measurement in step 3, to position the 'wall brackets'.

a: Important: The measurement given in step 3 are the maximum the brackets can be spaced apart, the brackets must fit within that measurement.

b: Mark the bracket fixing holes onto the wall. Drill \varnothing 8mm holes, insert the wall plugs and attach the brackets.

c: Important: The brackets must be the correct way up, as shown.

Position the unit on the brackets.

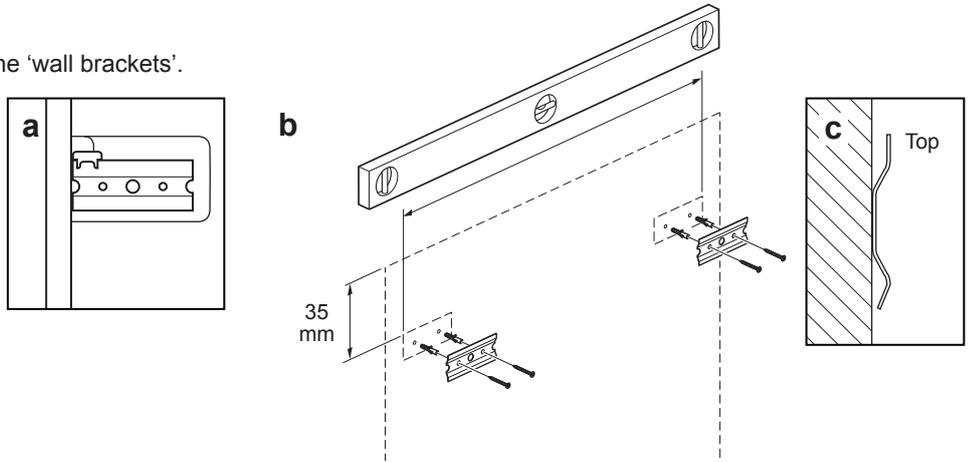


Step 4

a: Check the unit is level.

If leveling is required: inside the unit, use a screwdriver to adjust the hanging position.

b: To lift or lower the unit adjust the screw shown.


c: To move the unit closer or further from the wall adjust the screw shown.

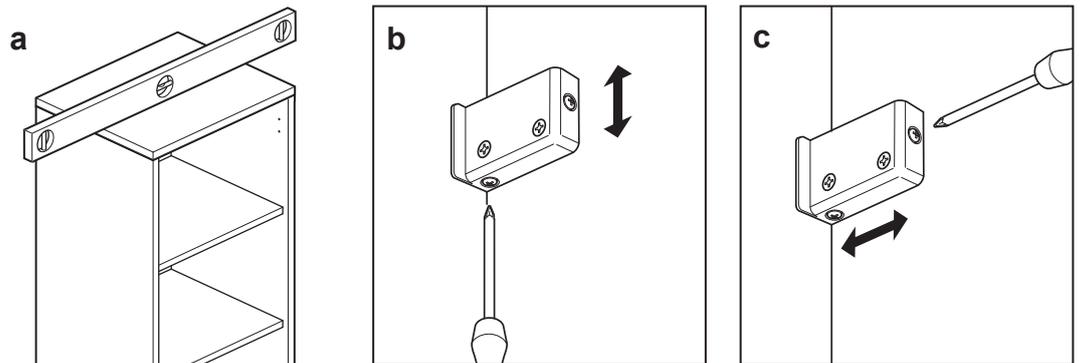


Step 5

Note: only attach the handle now if **not** changing the opening side (see next page).

Attach handle: Attach the handle (the correct way up) to the door front.

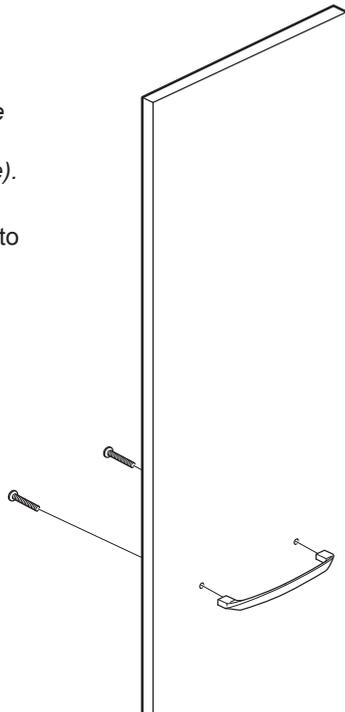

Step 6

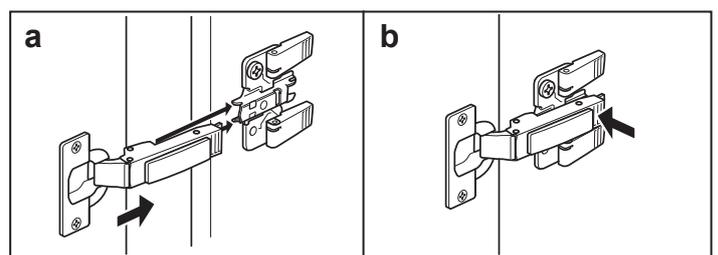


Note: Only re-fit door now if **not** changing the opening side (see next page).


Re-fit door: **a:** Reposition both hinges onto the hinge plates.
b: Push the front until the hinge 'clicks' into position.

If changing the door opening side or the door alignment needs adjusting, follow the instructions on the next page.

Changing door opening side

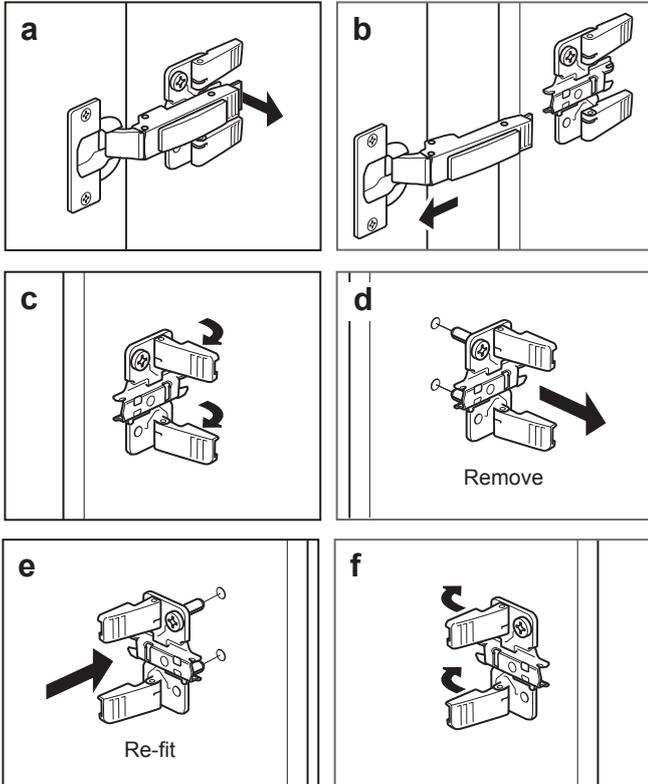


a: Lift tab (shown) on all hinges, to release.
b: Pull door back. **c:** Lift the hinge plate tabs. **d:** Remove the hinge plates. **e:** Re-fit hinge plates on the opposite side. **f:** Fold hinge plate tabs back.

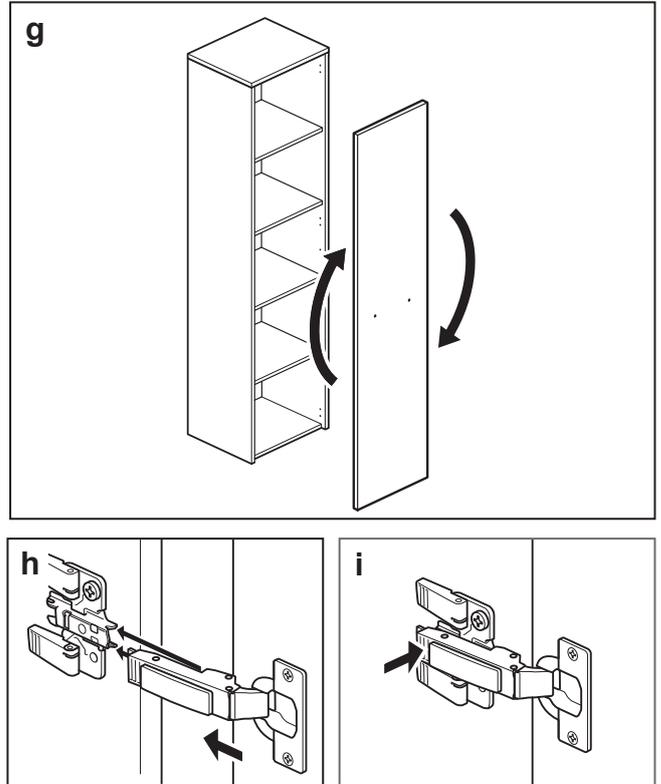

g: Rotate door.
h: Re-position all hinges onto the hinge plates.
i: Push the front until the hinge 'clicks' into position. Attach handle to door.

Hinge adjustment

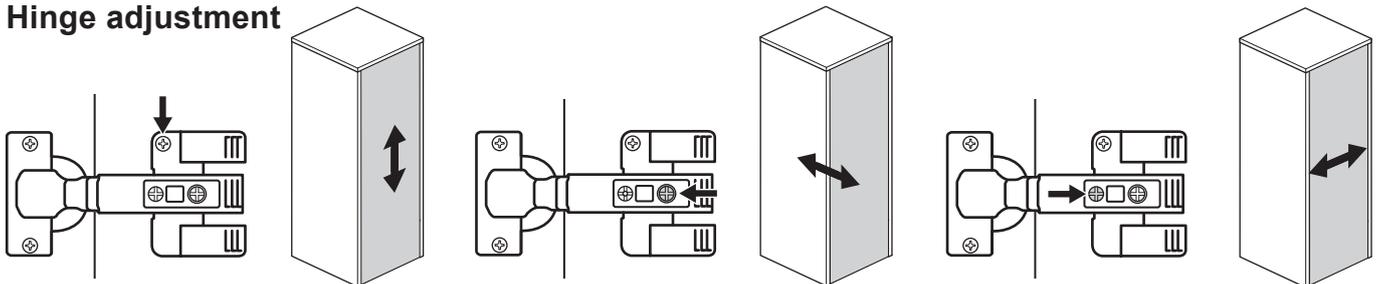

To move door up or down: Turn screw shown to move door up or down to suit.

To move door in or out: Turn screw shown to move door in or out to suit.

To move door left or right: Turn screw shown to move door left or right to suit.

bauhaus[✕]

For any further information please contact
 Bauhaus on: **0845 873 8840**

Or visit our web-site at:
www.bauhaus-bathrooms.co.uk

The manufacturer reserves the right to make technical
 modifications without prior notice.