


Product parameters:

Power	DC6V section No.5 alkaline battery
Power Consumption In Static	≤ 0.5 mW
Inductive Distance	10 ~ 14 cm
Suggest Water Pressure	0.5 ~ 5 Bar
Ambient Temperature	0.1 ~ 45°C
Water Temperature	0 ~ 70°C
Supply Pipe Size	G1/2"




Operation Notice:

1. The following situation may occur filter impurities accumulation.
2. The product is used between water pressure 0.5-5Bar, water temperature 0-70°.
3. Regularly clean the surface of faucet in neutral wash solution. then dry it with a piece of soft cotton cloth to keep it bright.
4. Alkaline battery 1.5V No.5 used.

Installing steps(Figure I).

- 1, The a side of inlet pipe 7 install into the inlet hole of tap body 1.
- 2, The two fixing bolts install into the M6 screw hole of tap body.
- 3, The inlet pipe 7 & Power output socket 9 pass through the rubber washer 2 and mounting hole of basin, then put the tap body over the basin mounting hole.
- 4, The parts 3 , 4 pass through the two fixing bolts 5 , then the tap body locked by the two copper nuts. (note the direction and position of the tap body).
- 5, Open the power box and load 4pcs Alkaline Batteries 13 (user prepare the battery).
- 6, The b side of G1/2" outlet pipe 7 connect with the outlet joint of controller box 12, Power output socket 9 connect with power outlet plug 10 (note the position of four holes). Then lock these two parts by plastic nut 11.
- 7, Two plastic expansion screw 14 installed into the wall, then firm the plastic fixed shelf 16 by two SS304 tapping screws 15. (not the position and height). Put the controller box 12 into plastic fixed shelf 16.
- 8, One side of G1/2" inlet pipe 8 connect with the inter joint of controller box 12, and other side connect with inter valve.
- 9, Turn on water to check, check all the joints to make sure there is no leaks.

● Figure I

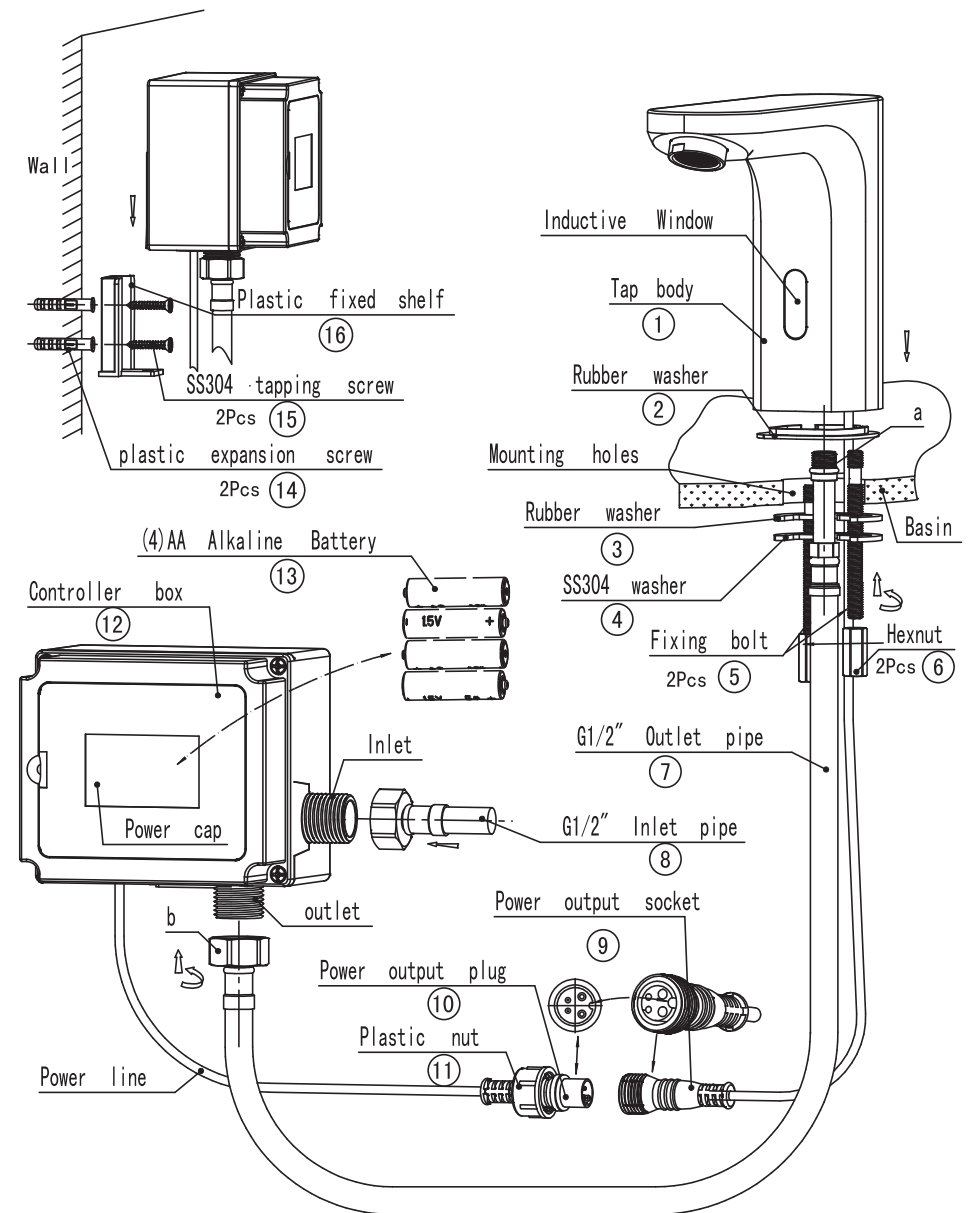

Victorian Plumbing

Diamond House.41, Stephenson Way. Formby Business Park Formby. England. L37 8EG

Tel: 0044 800 862 0878

Website: www.victorianplumbing.co.uk