


GENERAL FITTING GUIDE for BOTTLE TRAPS

PRODUCT SHOWN WILL VARY
DEPENDING ON MODEL

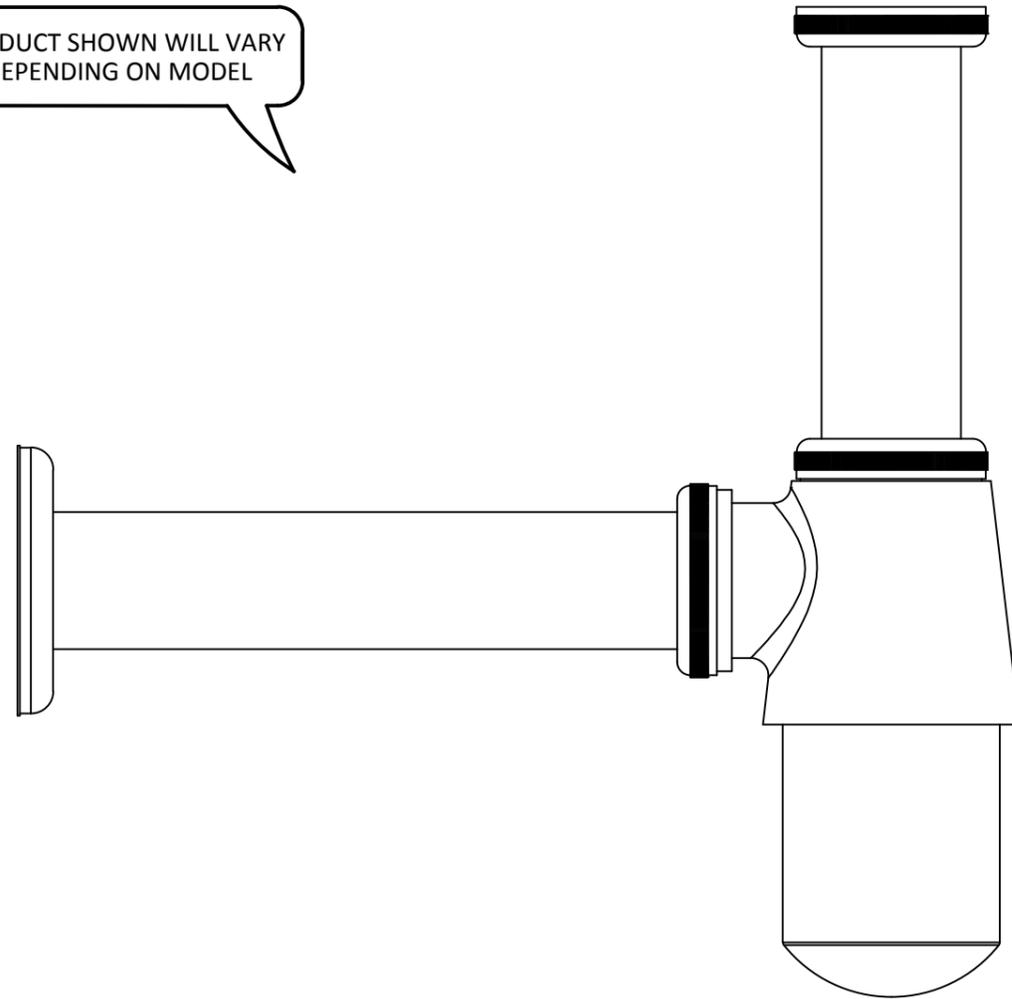

GUARANTEE & AFTERCARE

When installing or using tools, extra care must be taken to avoid damaging the finish or fitting. To maintain the appearance, please ensure it is cleaned regularly using a clean soft damp cloth only. Abrasive cleaners or detergents must not be used as they may cause surface deterioration. The company provides a guarantee against faulty material or manufacture excluding serviceable parts, providing they have been installed, cared for and used in accordance with our instructions.

The company reserves the right to continually evolve its product lines without notification. The company will not accept any liability regarding specification changes and their consequences unless previously quoted by the company in writing.

INSTALLATION PROCEDURE

1. Assemble knurled nut (B) onto the plated metal tube (C) under the top flange with the wide end facing upwards to receive the waste assembly. Slide the second knurled nut (D) onto the plated metal tube (C) ensuring the wide end is facing down.
2. Push the plastic sleeve (E) into the top of the bottle trap main body (F) ensuring the lip seats on the neck of the trap. Insert the metal tube (C) into the centre of the plastic sleeve and lock the knurled nut (D) firmly into position.
3. This trap is designed to connect to a standard 1.1/4" metal waste outlet pipe (I). Slide the knurled nut (H) and tapered washer (G) over the waste pipe and tighten the nut.
4. When fitted onto the basin waste outlet the washer (A) must be placed inside the knurled nut to form a seal between the trap and waste.

