


Installation instructions




Thank you for purchasing this Victorian Plumbing product. Please follow these care instructions to ensure your product retains its high quality finish - **and retain this leaflet for future reference.**

1. Identify all components are present prior to installation
2. Take the adjustable lever(5) and locking nut(3)out
3. Make the handle(1)across the hole of tank and then fit the washer(2)and locking nut(3), screw the locking nut (3)tightly
5. Put into the adjustable lever(5),and connect the hook with adjustable lever in a suitable hole
6. Tighten screw of the adjustable lever (6)

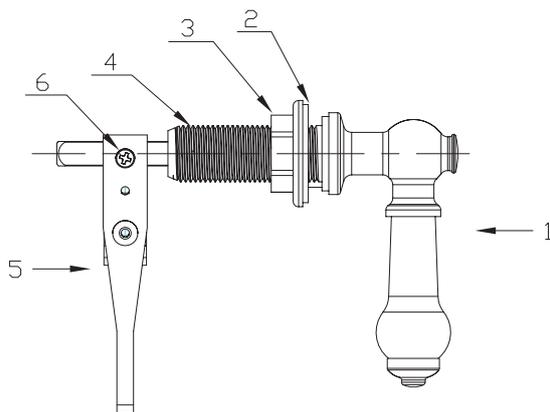

1. Handle
2. Silicon washer
3. Locking nut
4. Screw pipe
5. Adjustable lever
6. Screw

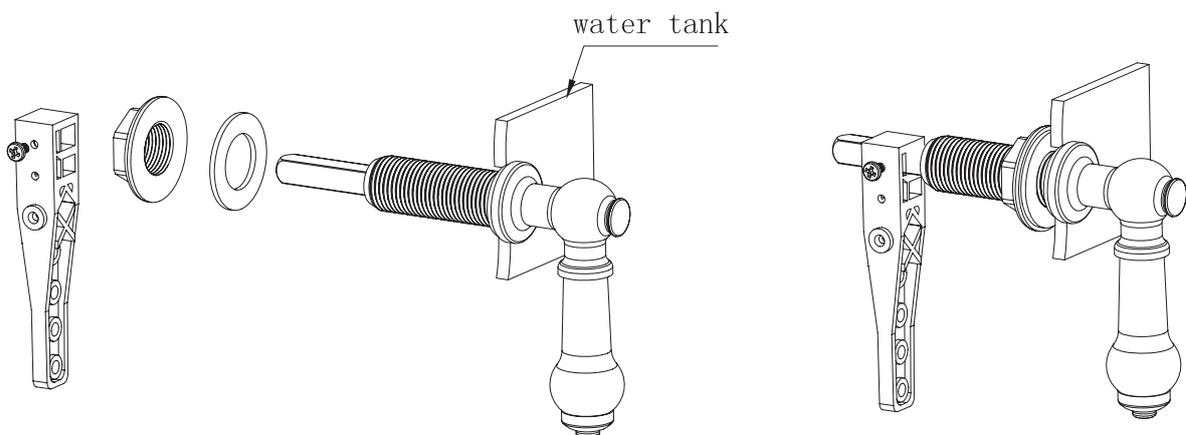

Victorian Plumbing

Diamond House. 41, Stephenson Way. Formby Business Park Formby. England. L37 8EG

Tel: 0044 800 862 0878

Website: www.victorianplumbing.co.uk