

NEW ENGLAND / VALENCIA

Base Unit Installation Instructions



Please make the Care Instructions available to the end user.

Installation Notes

*Base units can be secured to the wall if required using suitable angle brackets (not supplied).

*If you cut any part of the base unit during installation, it is essential that the cut surfaces are resealed with a suitable waterproof varnish, paint or sealant. Failure to adequately reseal may result in water damage for which the manufacturer cannot be held liable.

*Ceramic slab basins can be secured to the base units using silicone sealant (not supplied).

Hinge Adjustment

Hinges may require adjustment for both the doors to fit neatly together. This is achieved with the adjustable soft close hinges using the adjustment screws A and B (see Fig. 1). To access these you will first have to remove the screw cap cover. The hinges also feature a quick release mechanism to quickly and easily detach the door from the furniture frame, this is activated by pressing button C (see Fig. 1).

To make adjustment 1 (see Fig. 2) tighten/loosen adjustment screw A.

To make adjustment 2 (see Fig. 2) loosen adjustment screw B and then slide the hinge into the required position.

Fig. 1


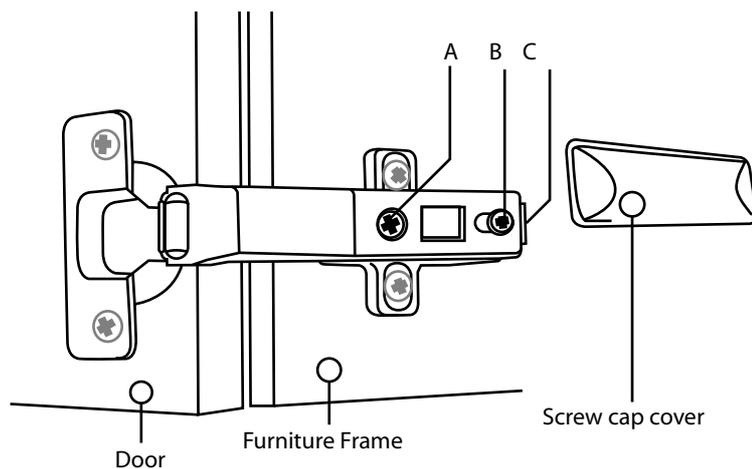


Fig. 2

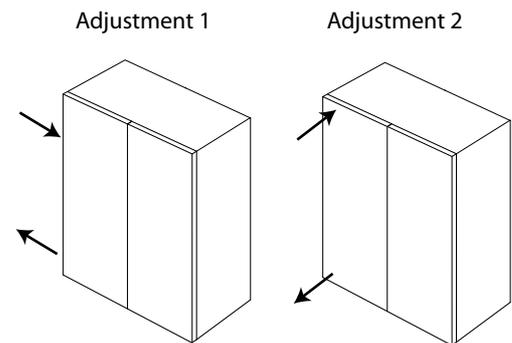

Care Instructions

As with all wooden furniture, this unit should be treated with care.

Any furniture will deteriorate through exposure to excessive water from spillage or condensation.

Mop up any water splashes after use.

It is recommended that all bathrooms be well ventilated with a suitable extractor fan.

Clean with a soft damp cloth only.

Do not use cream cleaners or cleaners containing bleach.

Do not scrub or scour.

Do not use abrasive cleaning agents.

If a polish must be used, we recommend a wax free polish.

Replacement components

Should you require any replacement components for this product please contact Roper Rhodes Ltd using the contact details below.