

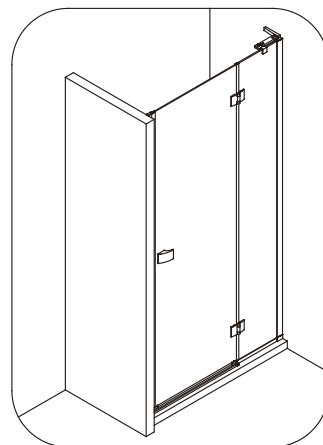


## HINGED DOOR

DHDSC0700+ DSPSC0700+  
DHDSC0760+ DSPSC0760+  
DHDSC0800+ DSPSC0800+  
DHDSC0900+ DSPSC0900+  
DHDSC1000+ DSPSC1000+  
DHDSC1100+ PRSPB0800  
DHDSC1200+ PRSPB0900  
PRDBC0800 PRSPB1000  
PRDBC0900  
PRDBC1000  
PRDBC1200

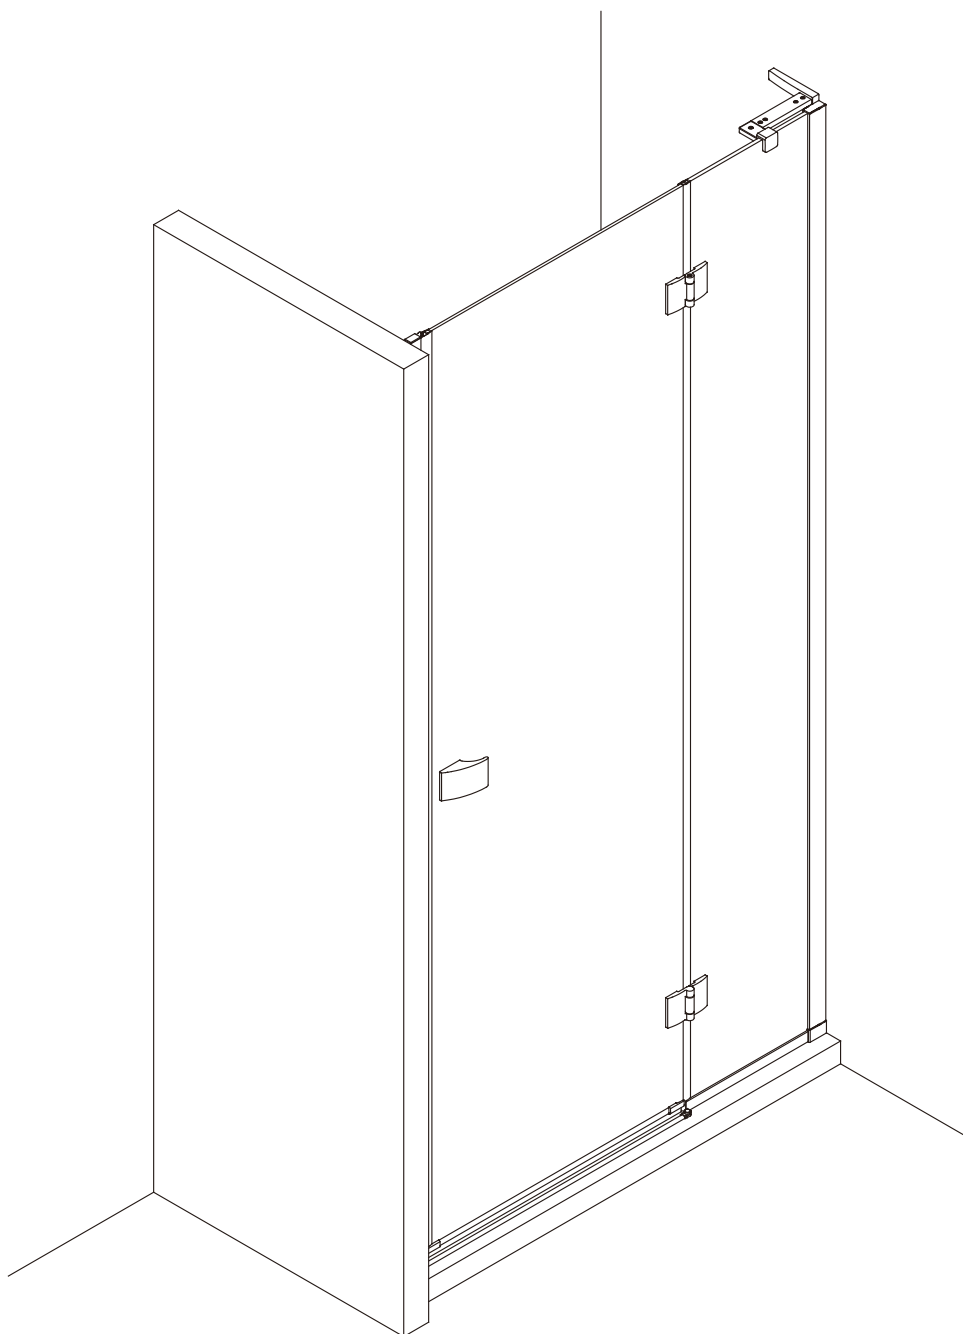

HINGED DOOR

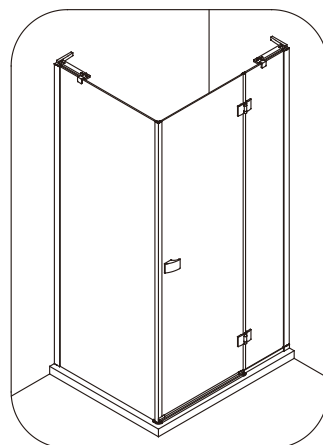

SIDE PANEL & HINGED DOOR

## INSTALLATION INSTRUCTIONS

crosswater<sup>®</sup>  
SHOWERING

## IMPORTANT - Please read before installation

**Please read these instructions carefully before starting installation and keep in a safe place for future reference.**

Check the contents of the pack carefully before installation. Simpsons will not be held responsible for any de-fit / re-fit costs where faulty product has been fitted.

If any fault is found with materials or workmanship, it must be reported immediately to the manufacturer. Remedial action will be taken, based on information received, on condition that:


1. Full details are supplied to the manufacturer;
2. The enclosure has not been modified or tampered with;
3. The manufacturer is informed of any damage/shortages prior to installation.

We do not accept responsibility for any problems that may occur through incorrect installation.

The success of the installation and operation of any shower enclosure is, of course, dependant on the squareness, alignment and construction of the walls to which fixing is to be carried out.

### VERY IMPORTANT

You must complete all tiling and grouting, and the shower tray **MUST** be level and fully sealed to the tiles before installation. If you do not fit the enclosure onto a tiled surface, or seal the tiles to the tray before installation, water may soak into the wall behind the wall profiles.

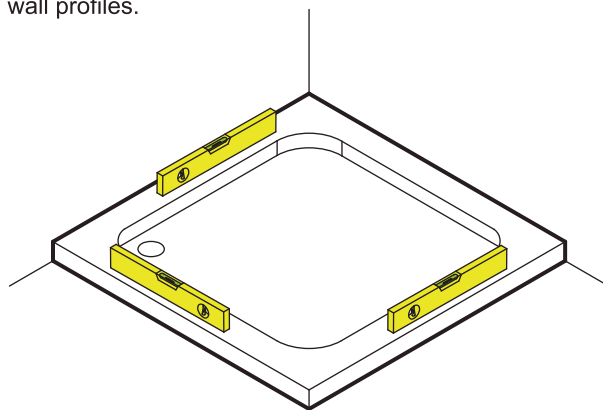

## INSTALLATION - Advice and safety

The installation instructions are based on typical use and conditions.

All doors are designed to open outwards only.

These hints have been prepared for your guidance, you must exercise due care at all times.

For Health and Safety 2 people must carry out the installation of this enclosure.

Handle glass with care. Although the glass supplied is toughened safety glass (EN12150), impacts can damage both the glass and the frame.

### Warning!

Please check for any hidden pipes or cables before drilling holes in the wall.

When using power tools always follow the manufacturers user instructions.

If the Framework is sealed to the tray on the inside, any water that may get into the framework will not be able to drain back into the tray, this may cause the enclosure to leak.





Leave the silicone sealant to dry for 24 hours before using the enclosure.

## CARE AND CLEANING

Do not use solvents or abrasive material or chemicals to clean the enclosure.

Only clean using soapy water and a soft cloth, rinse thoroughly afterwards.


## INSTALLATION

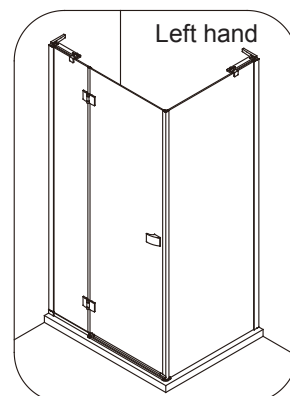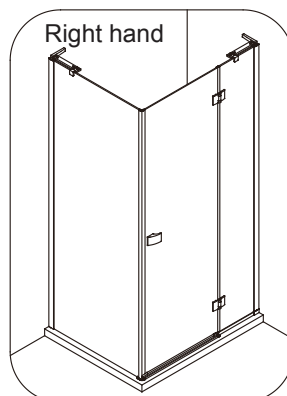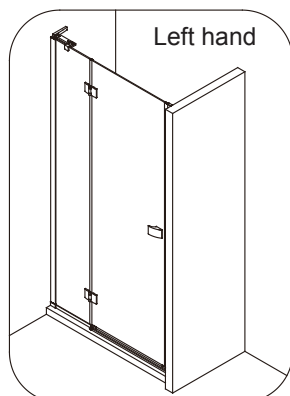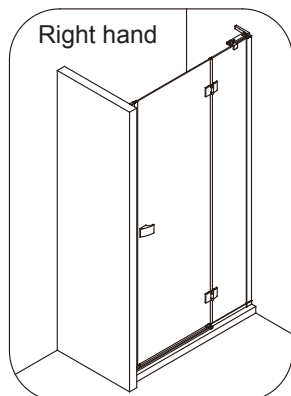

# CONTENTS


## DOOR IN ALCOVE

See pages 3 - 9

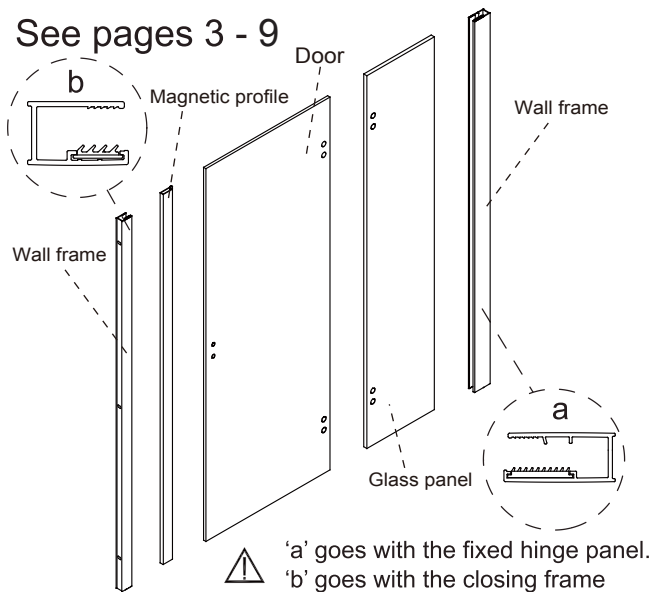

## SIDE PANEL

See pages 10 - 16

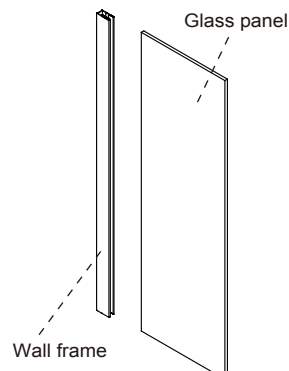

A		ST4 *40mm Screw x 5
B		ST4 *40mm Screw x 3
C		Wall Plug x 8
D		M4 *8mm Screw x 5
E		Wall Bracket x 1
F		Wall Bracket Cover I x 1
G		Support Bar x 1
H		Glass Clamp x 1
I		Cap I (LH) x 1
J		Cap I (RH) x 1
K		Cap II x 1
L		Cap III x 1
M		Fixed Part x 1
N		Cover for taper sleeve x 8

O		Hinge x 2
P		Handle x 1
Q		Breakwater Bar x 1
R		Waterproof Strip x 1
S		Magnetic Strip x 1
T		Wall frame sealing strip I x 1
U		Wall frame sealing strip II x 1
V		Allen Key 4mm x 1
W		Bottom Waterproof Strip x 1
X		Plastic Seal Strip x 1
Y		Water Channel Middle x 1
Z		End Part (RH) x 1
AA		End Part (LH) x 1
AB		End Part (RH) x 1

AC		End Part (LH) x 1
AD		Cover x 2
AE		Water Channel End (RH) x 1
AF		Water Channel End (LH) x 1
AG		Water Channel End (RH) x 1
AH		Water Channel End (LH) x 1
AI		Cover x 1
AJ		Cover (RH) x 1
AK		Cover (LH) x 1
AL		Cover x 1
AM		Bottom profile x 1
AN		Bottom seat (RH) x 1
AO		Bottom seat (LH) x 1


A		ST4 *40mm Screw x 2
B		ST4 *40mm Screw x 3
C		Wall Plug x 5
D		M4 *8mm Screw x 5
E		Wall Bracket x 1
F		Wall Bracket Cover I x 1
G		Support Bar x 1
H		Glass Clamp x 1
I		Cap I (LH) x 1
J		Cap I (RH) x 1
K		Cap II x 1
L		Cap III x 1
M		Fixed Part x 1
V		Allen Key 4mm x 1
AL		Cover x 1
AP		Magnetic Strip x 1
AQ		Magnetic Strip x 1
AR		Wall frame sealing strip I x 1
AS		End Part (RH) x 1
AT		End Part (LH) x 1

## Tools and equipment needed


Drill, 6mm Masonry drill bit, 3.2mm General drill bit, Philips screwdriver, Spirit level, Pencil, Scissors, Silicone sealant.

Step 1



Left hand

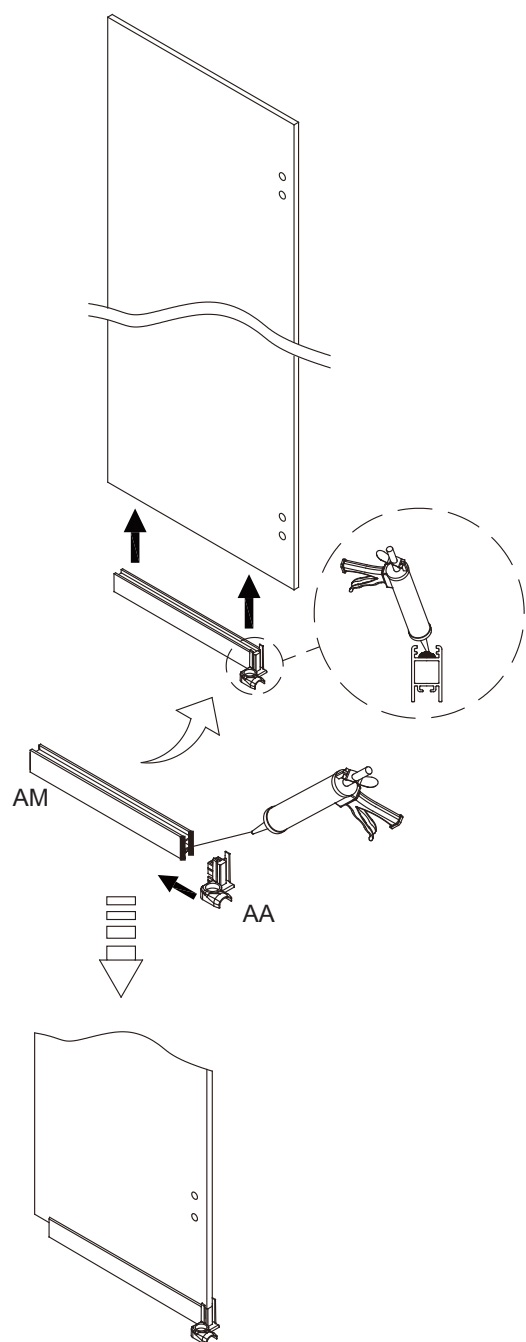



Right hand

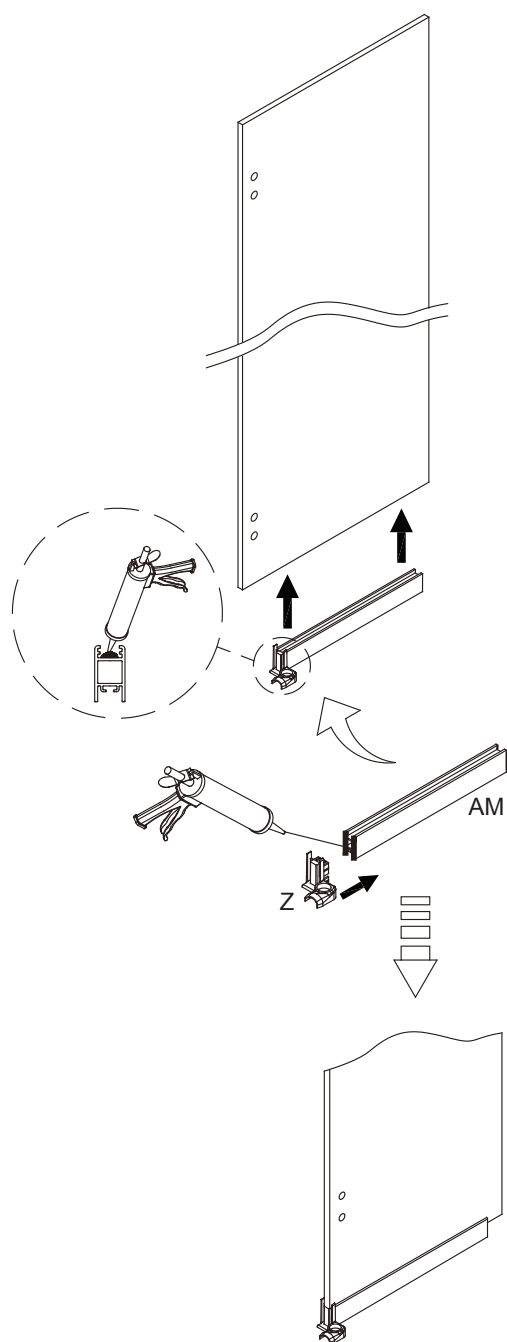














## Step 2

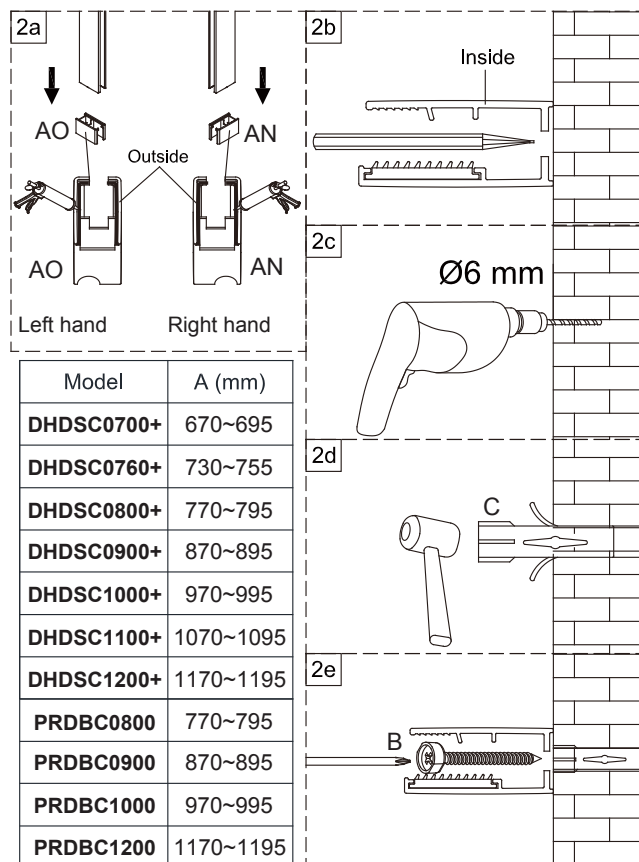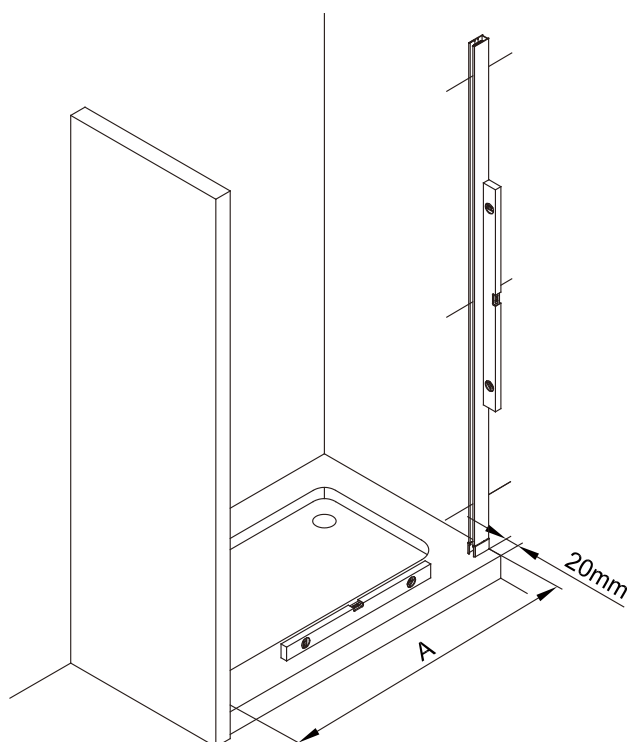



## Step 3

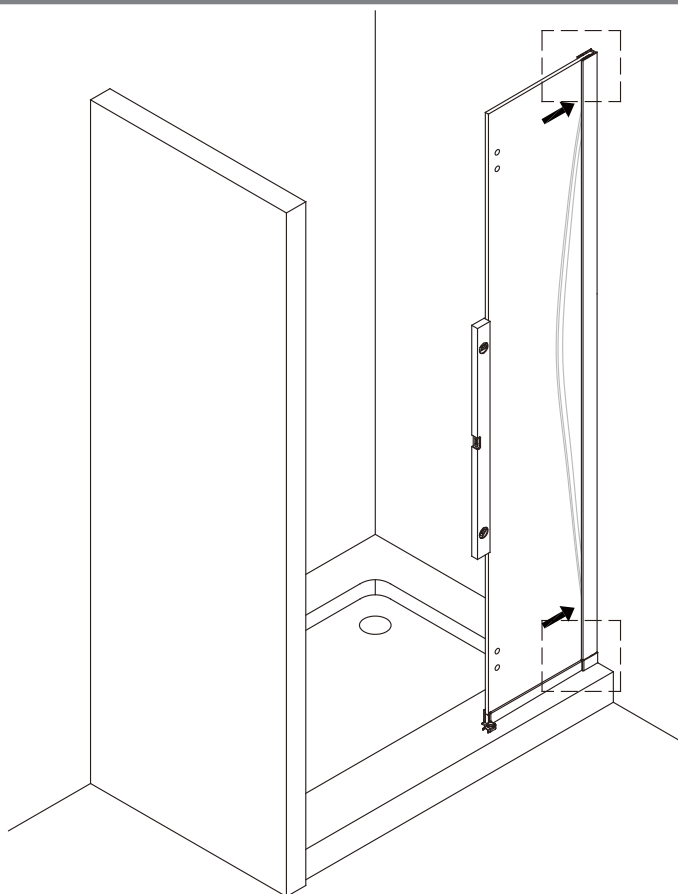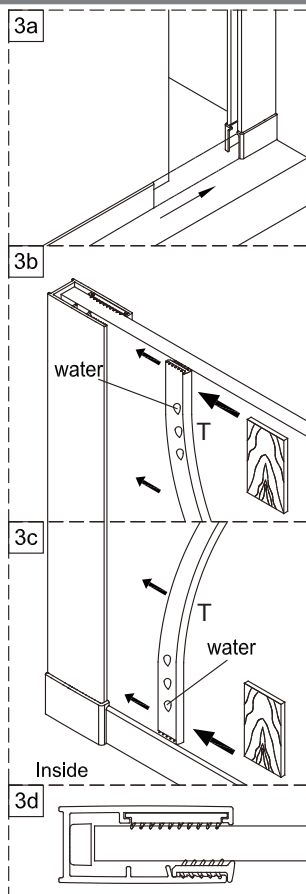

## Step 4

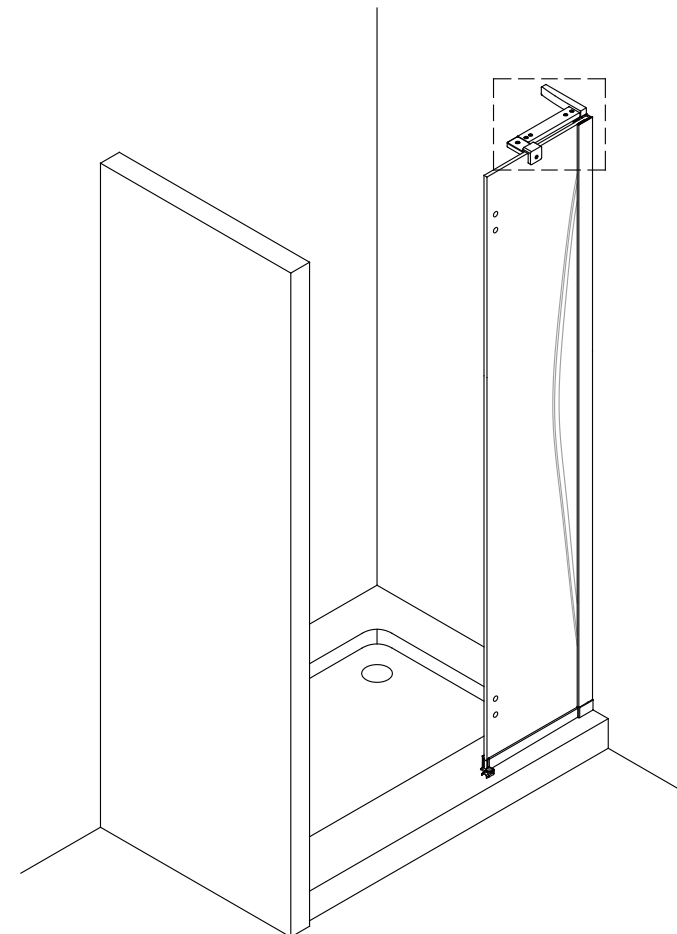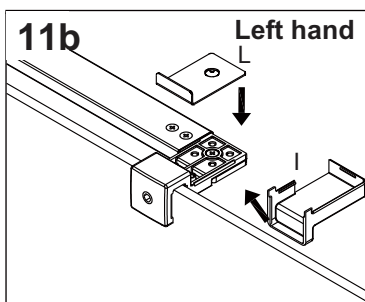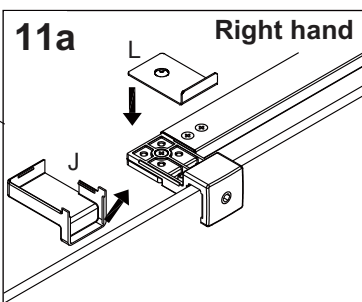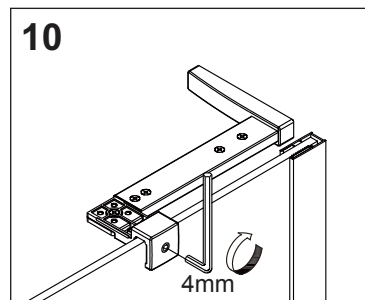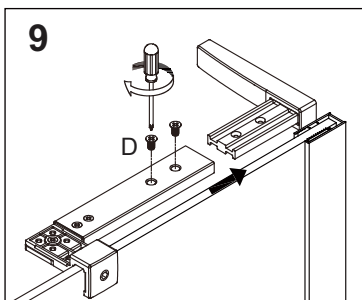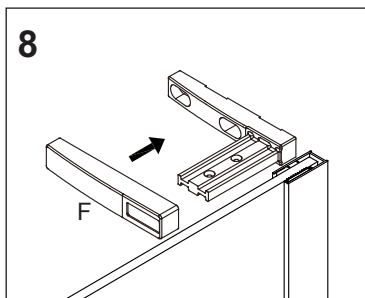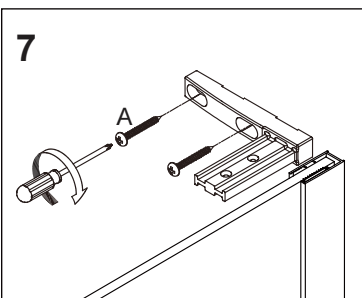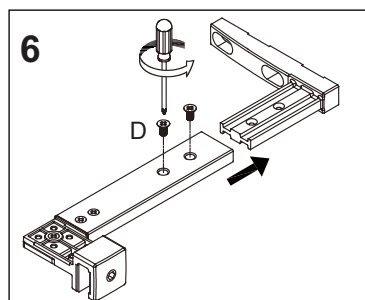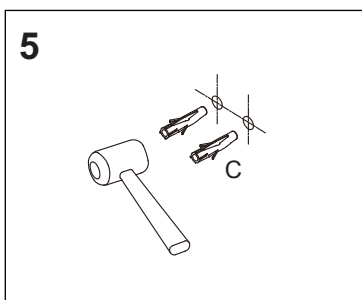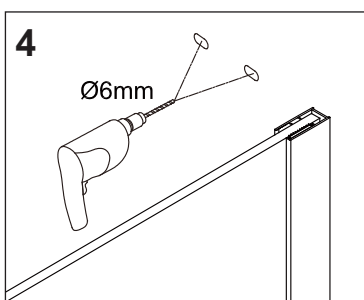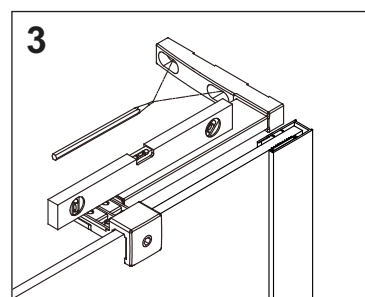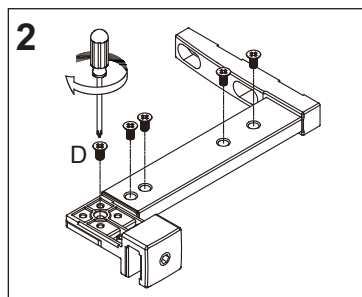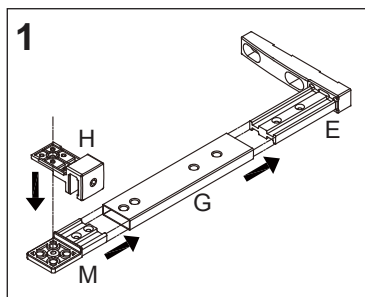


## Step 5

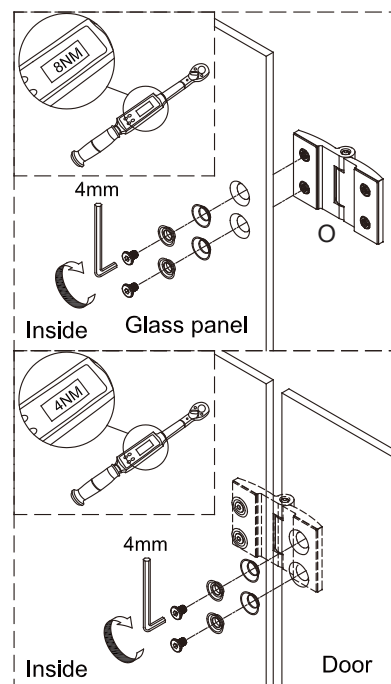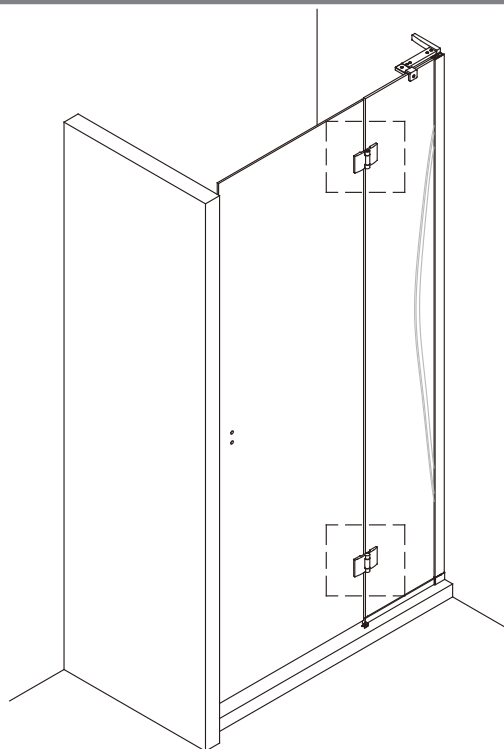


## Step 6

Depending on whether you have a right hand or left hand hinged door please select the correct diagram shown below for the fitting of the Water Channel, Water Channel Ends and Bottom Waterproof Strip.


1. Depending on left or right hand installation cut the redundant end of Bottom Waterproof Strip (W), cut off evenly the stepped section.
2. Insert Bottom Waterproof Strip (W) into Water Channel Middle (Y) with profile end to Non hinged side of door making sure it goes completely home into Water Channel End (AG) or (AH).
3. Slide Water Channel End (AE) or (AF) onto Bottom Waterproof Strip (W) and Water Channel Middle (Y) using silicone sealant on joint faces.
4. Slide Water Channel End (AG) or (AH) onto Bottom Waterproof Strip (W) and Water Channel Middle (Y) using silicone sealant on joint faces.
5. Insert completed assembly onto bottom of door and fit Plastic Seal Strip (X).

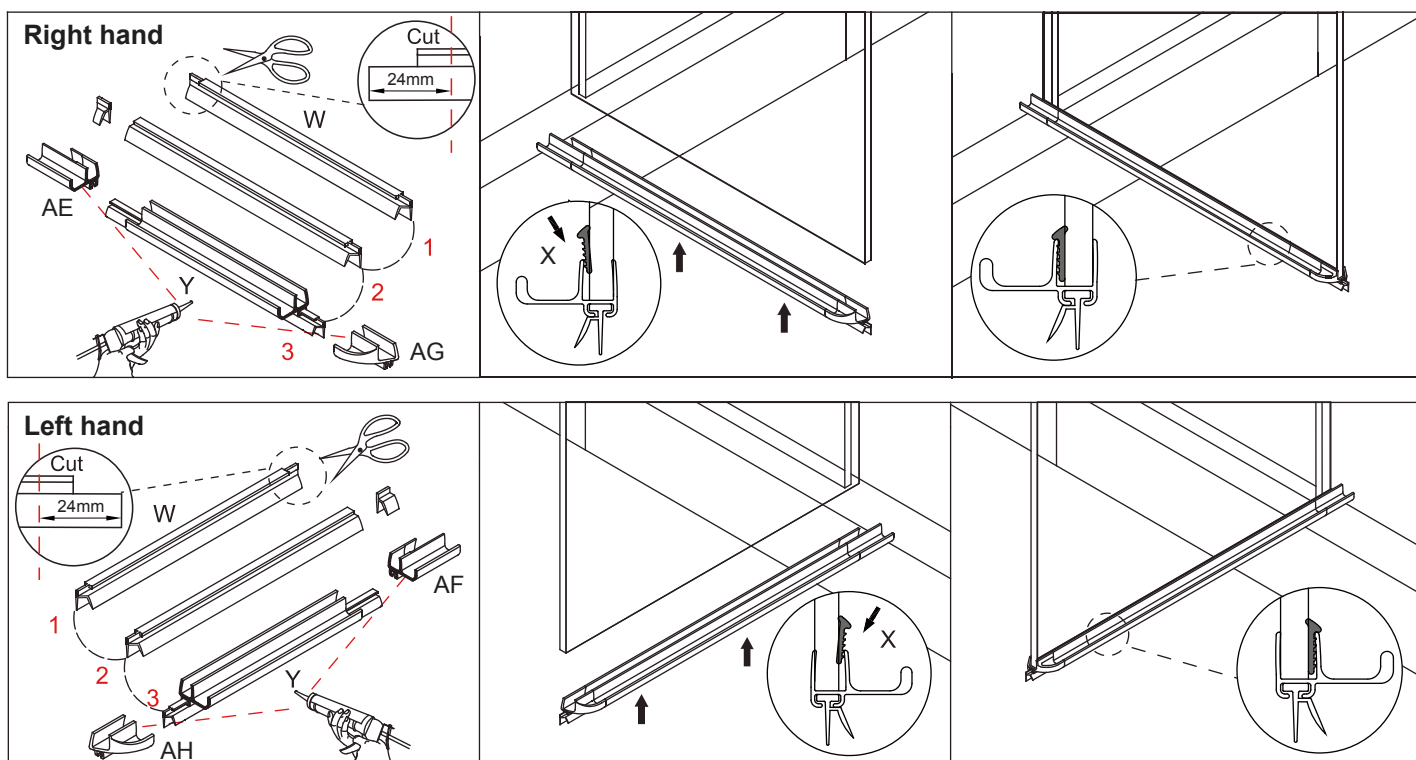

## Step 7



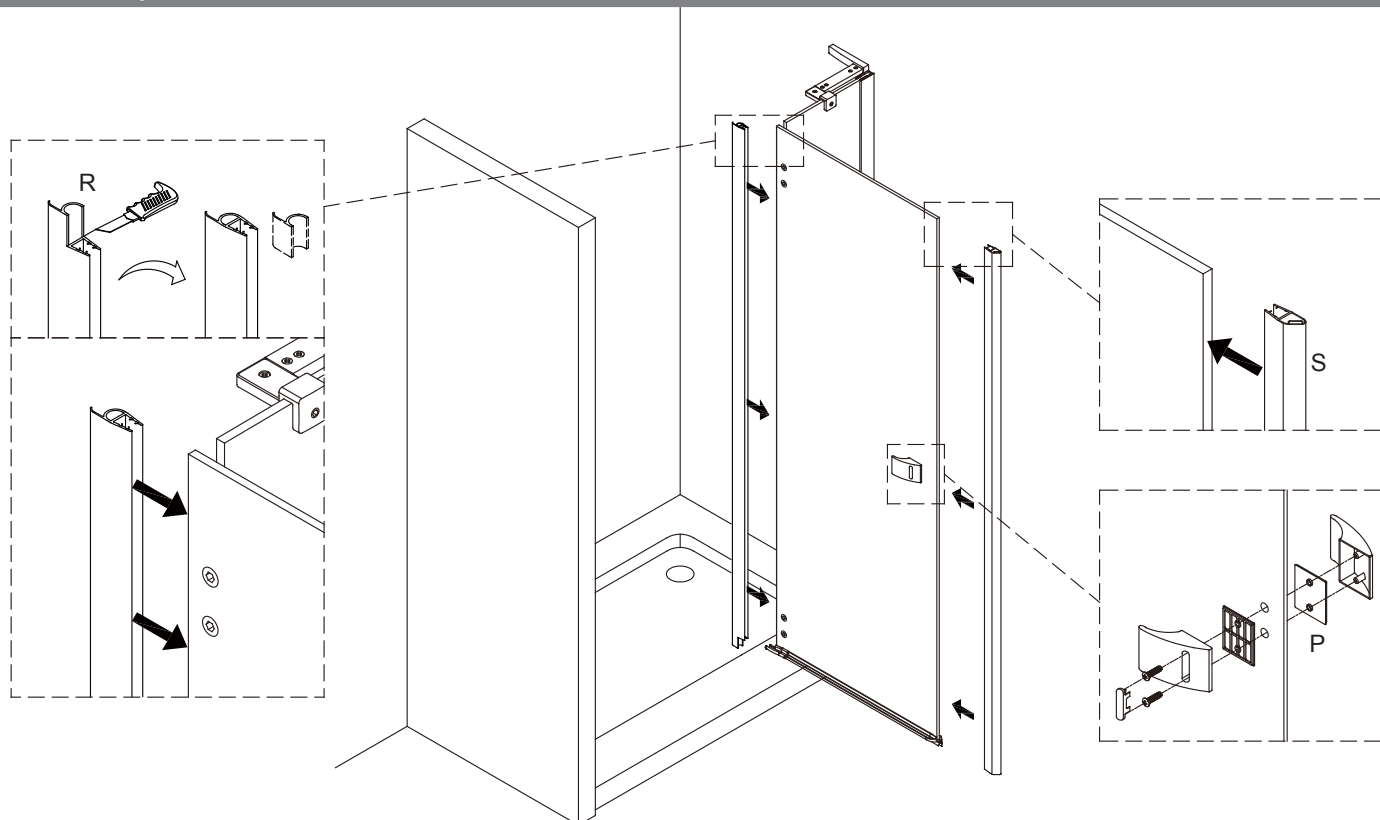


## Step 8



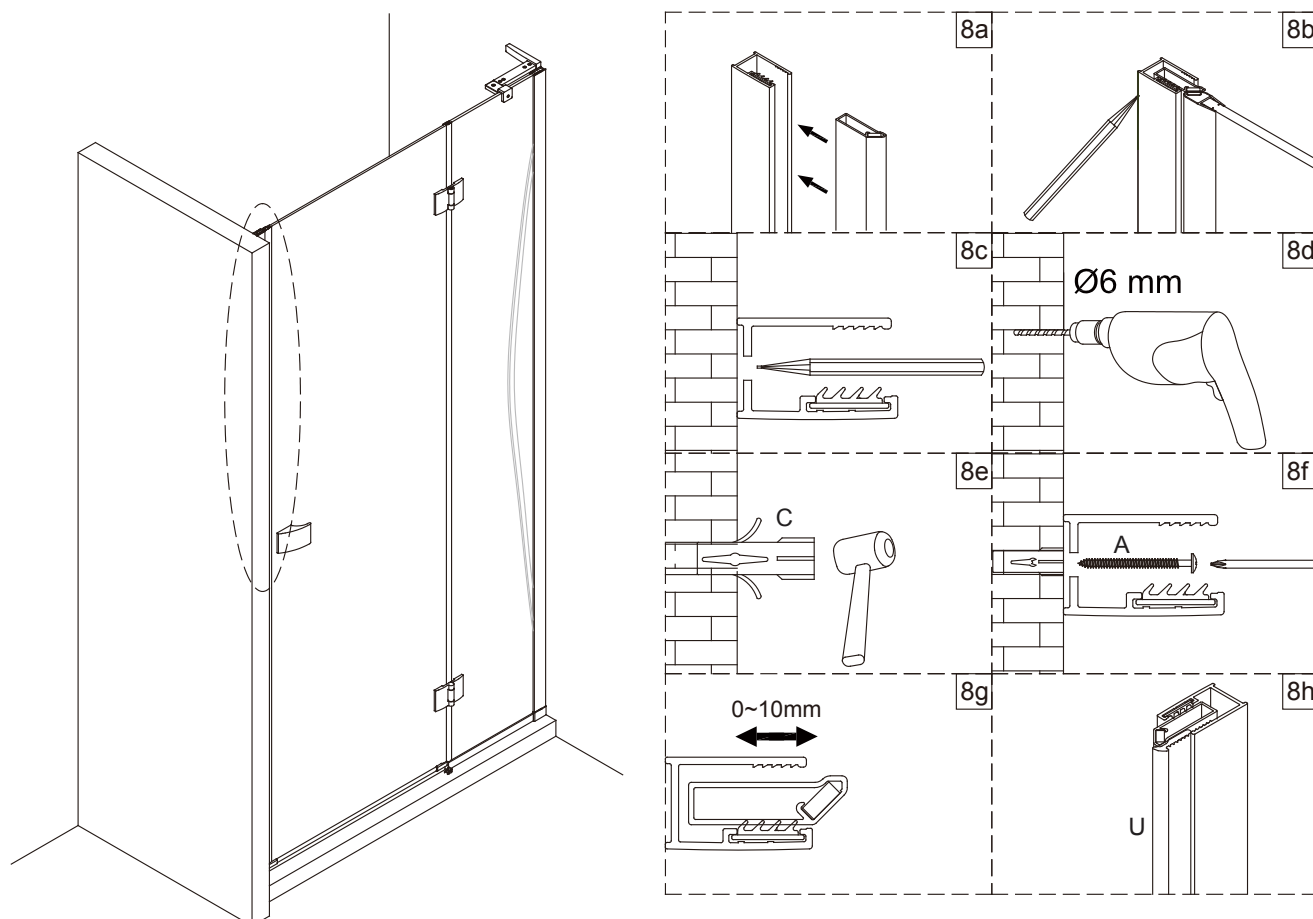





## Step 9

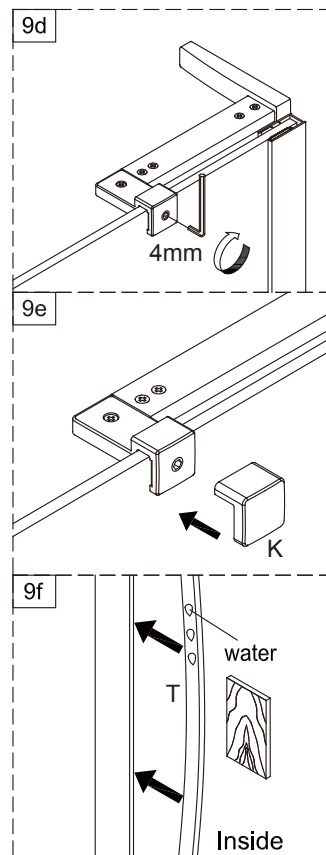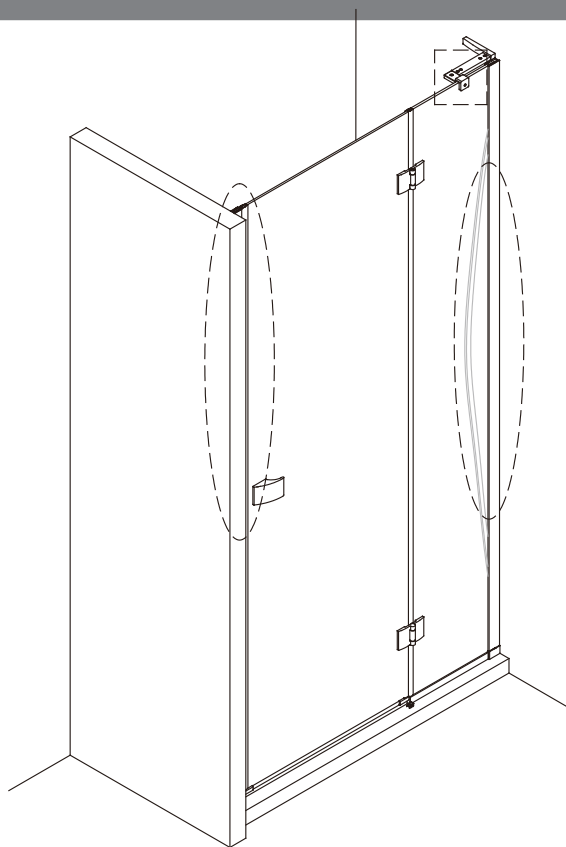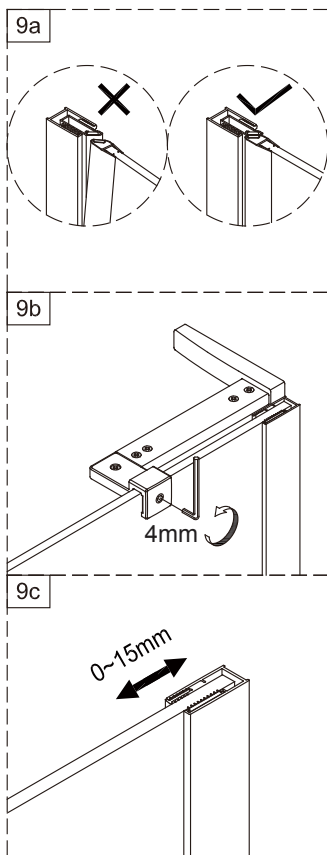


## Step 10

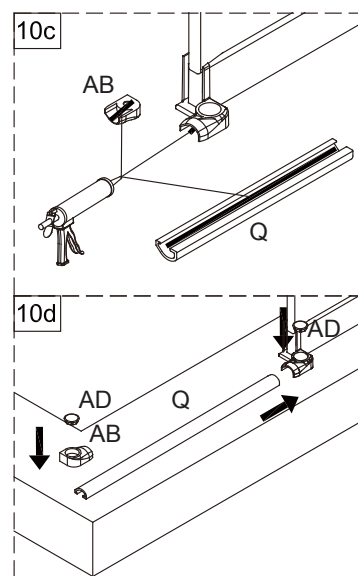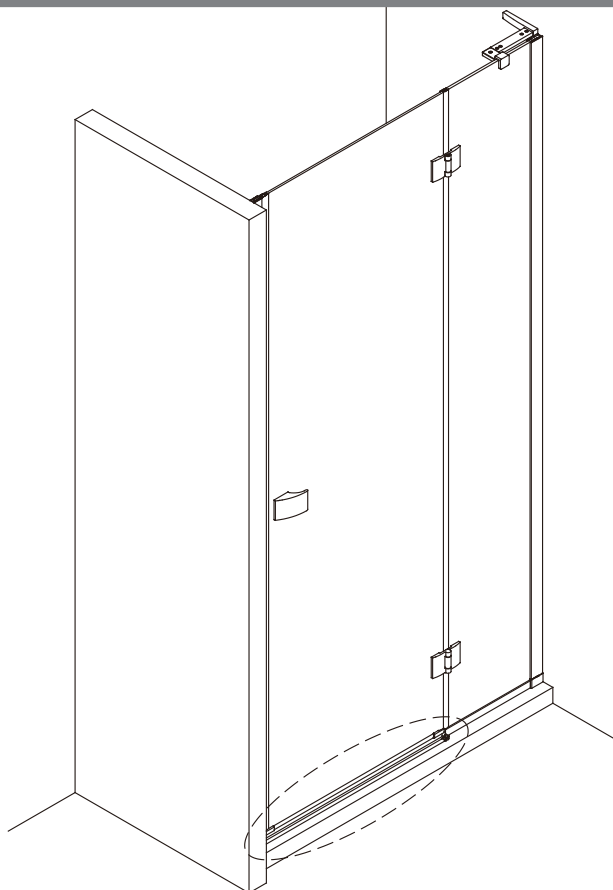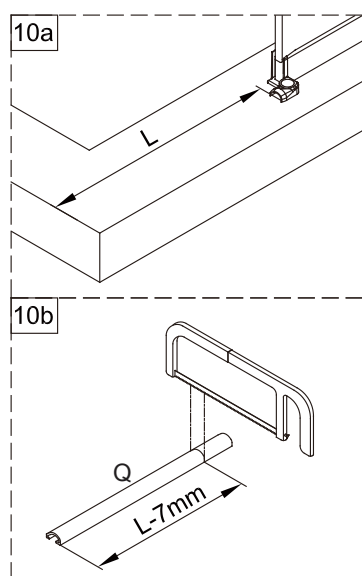

## Step 11

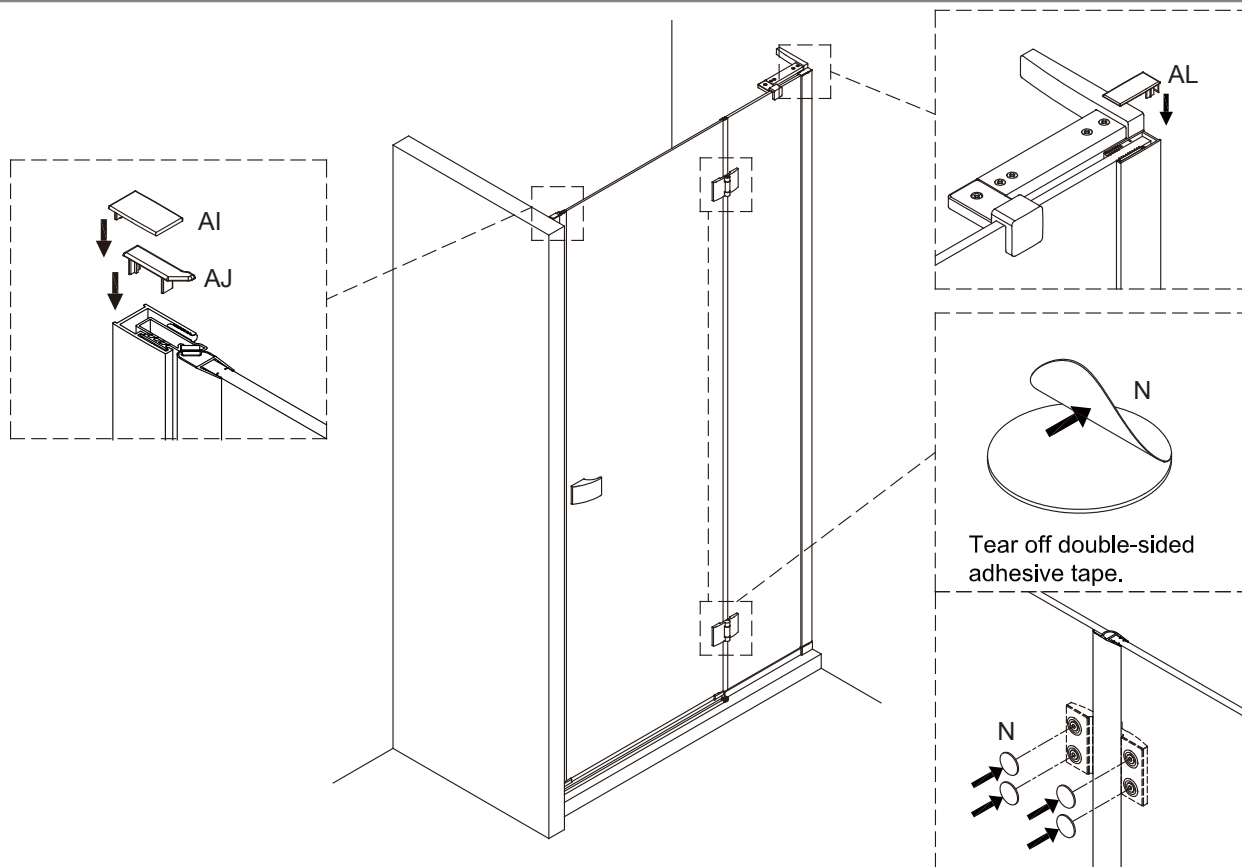


## Step 12

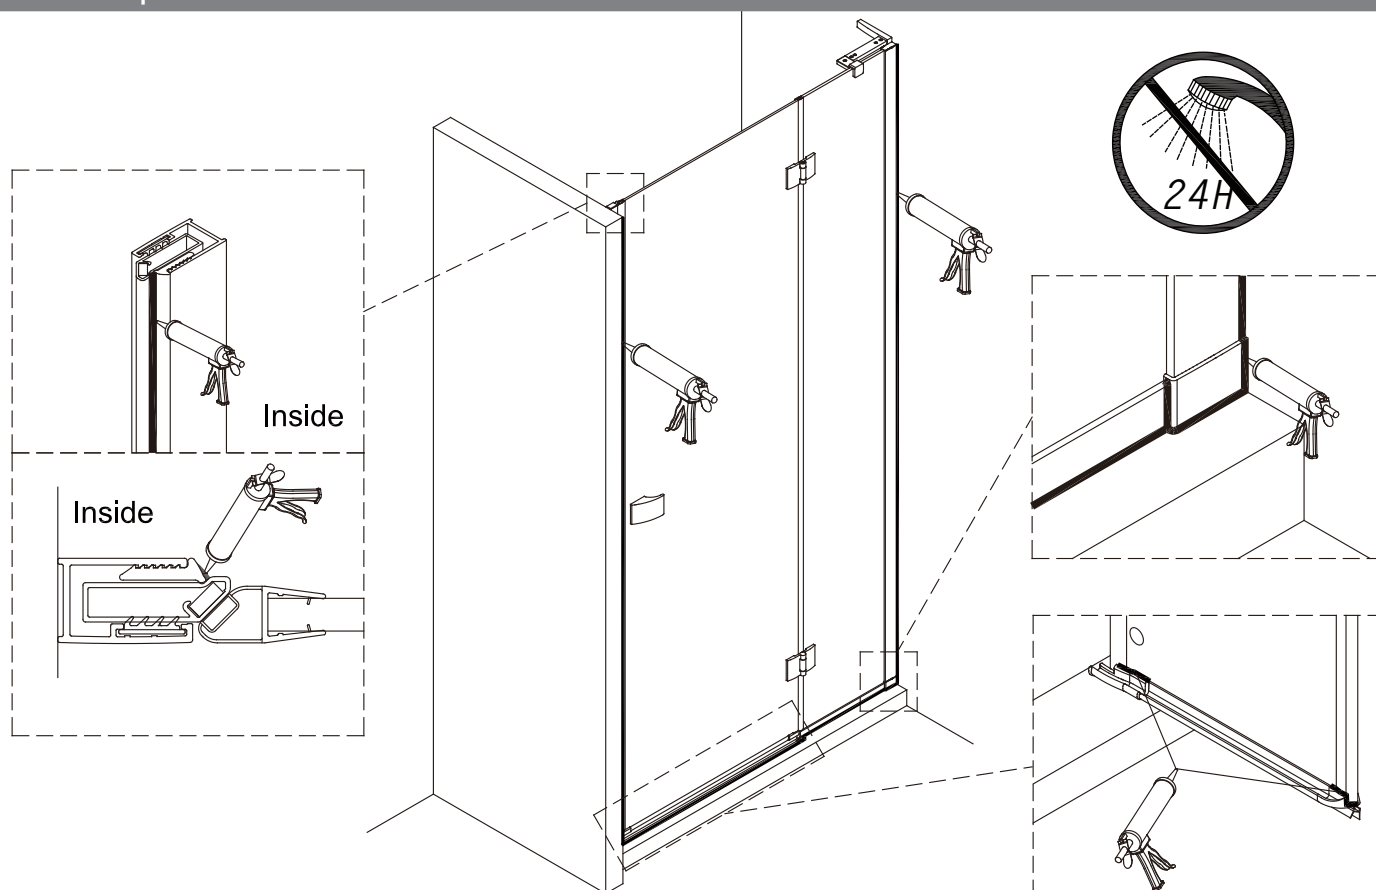


Step 1

Left hand

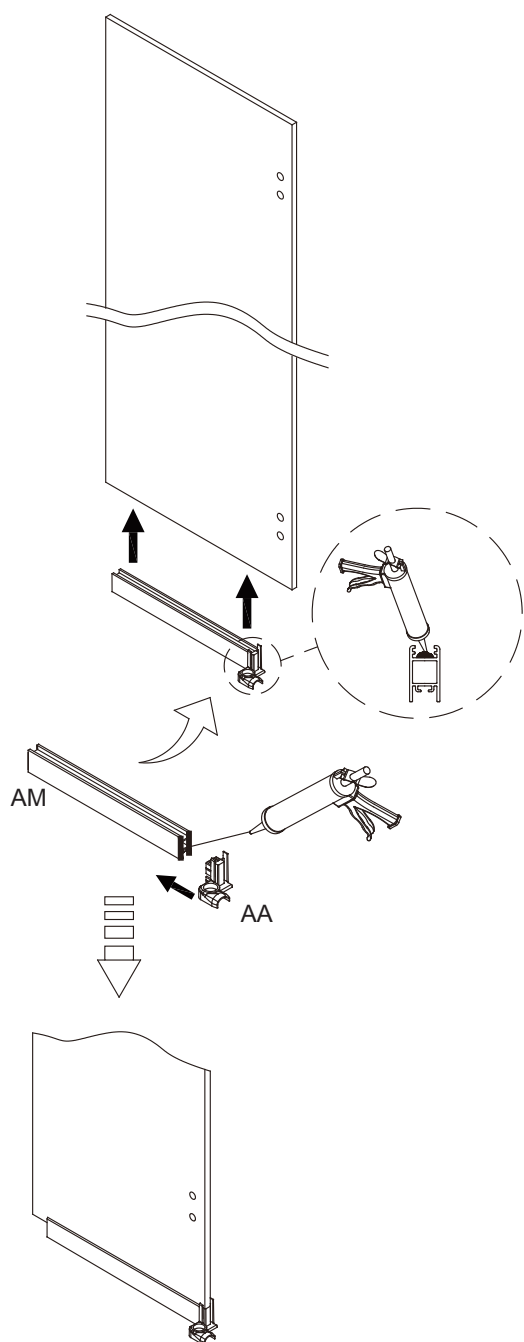


Right hand

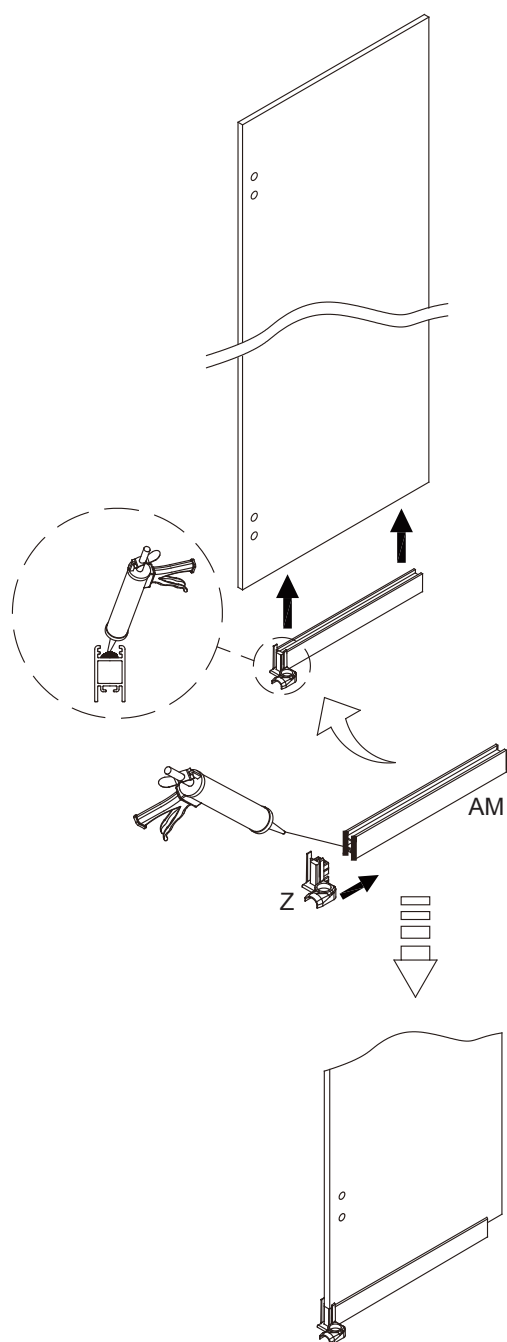


## Step 2

Model	A (mm)
DHDSC0700+	648~663
DHDSC0760+	708~723
DHDSC0800+	748~763
DHDSC0900+	848~863
DHDSC1000+	948~963
DHDSC1100+	1048~1063
DHDSC1200+	1148~1163
PRDBC0800	748~763
PRDBC0900	848~863
PRDBC1000	948~963
PRDBC1200	1148~1163














Model	B (mm)
DSPSC0700+	664~679
DSPSC0760+	724~739
DSPSC0800+	764~779
DSPSC0900+	864~879
DSPSC1000+	964~979
PRSPB0800	764~779
PRSPB0900	864~879
PRSPB1000	964~979

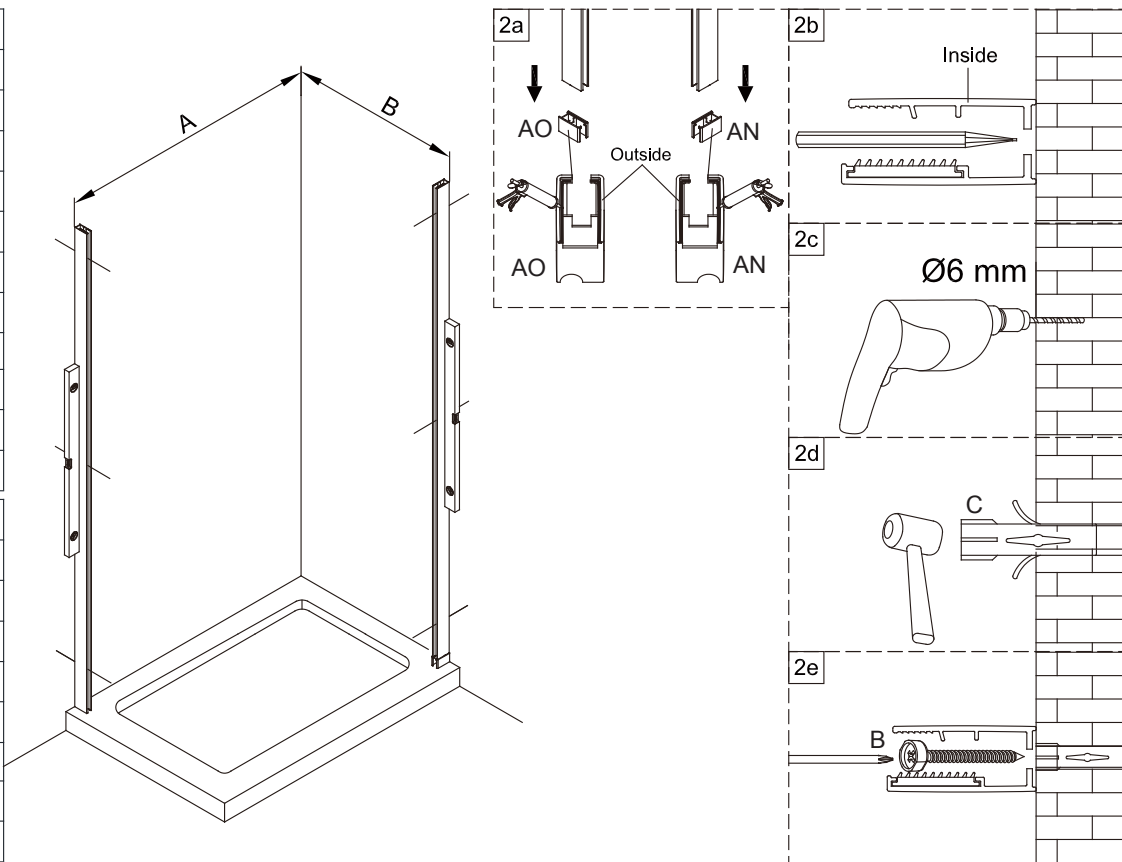



## Step 3

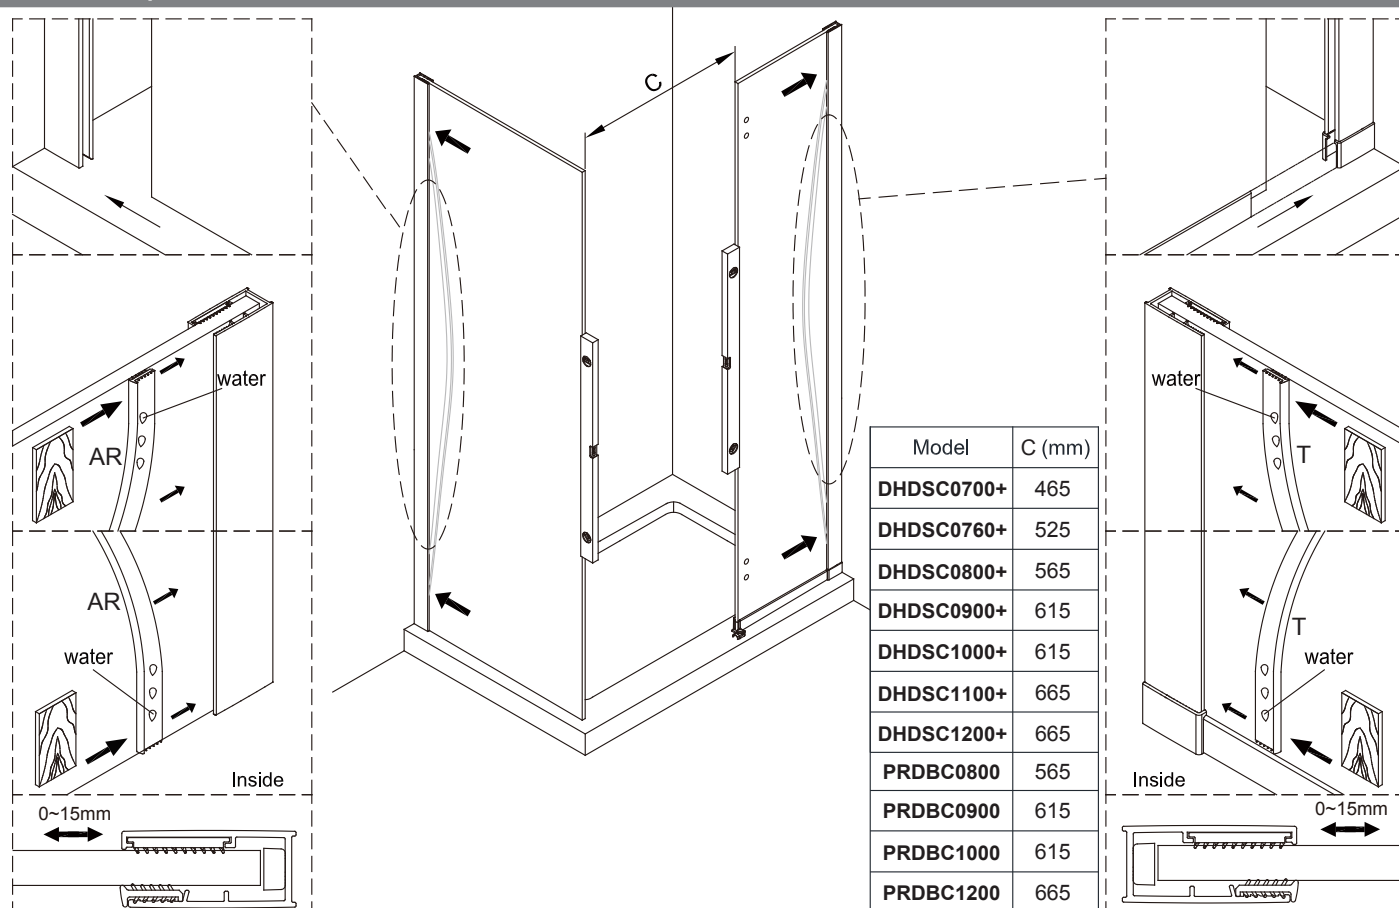

## Step 4

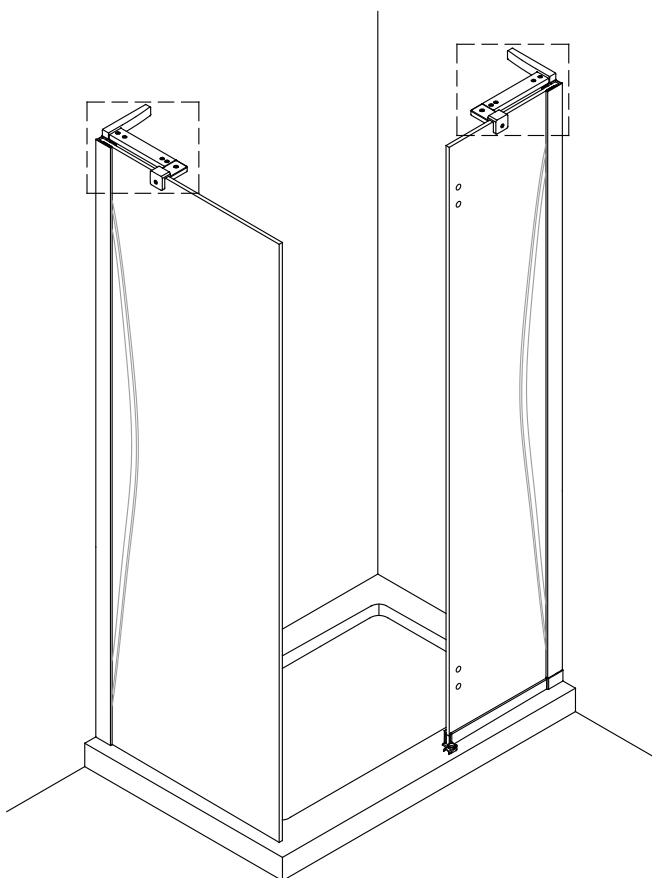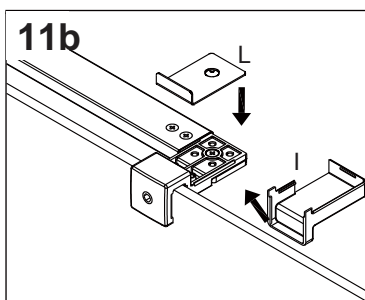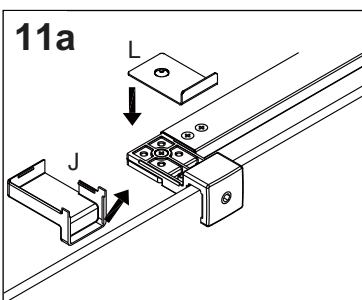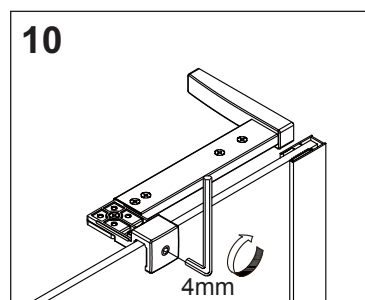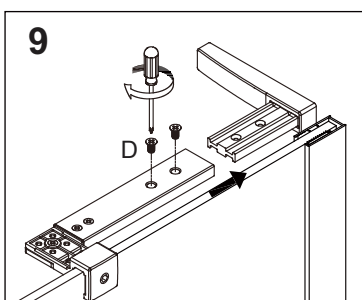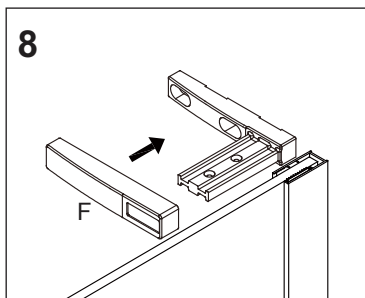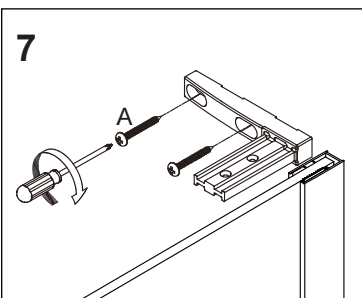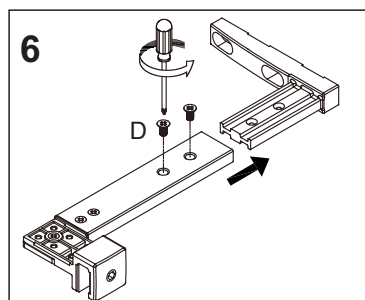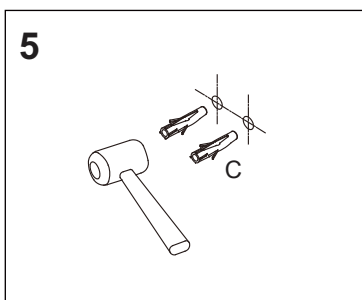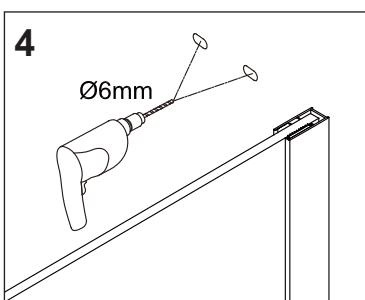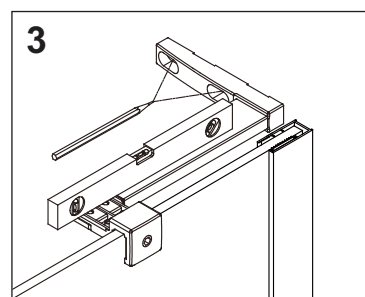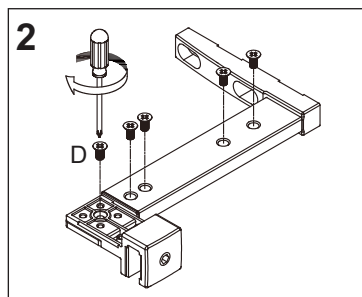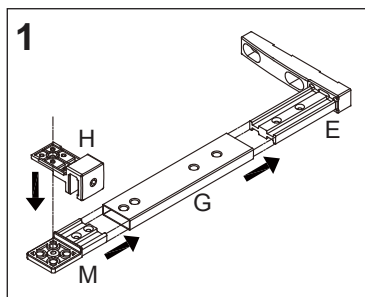


## Step 5

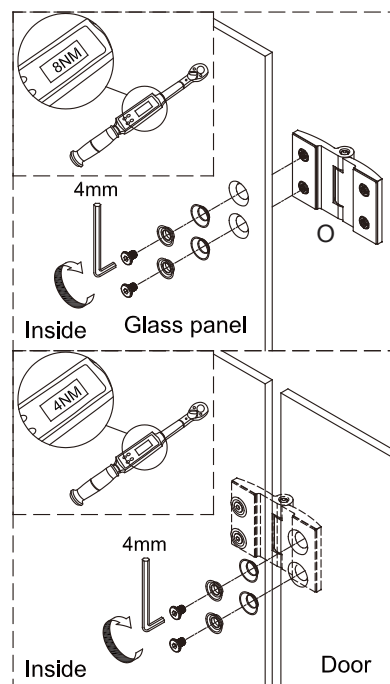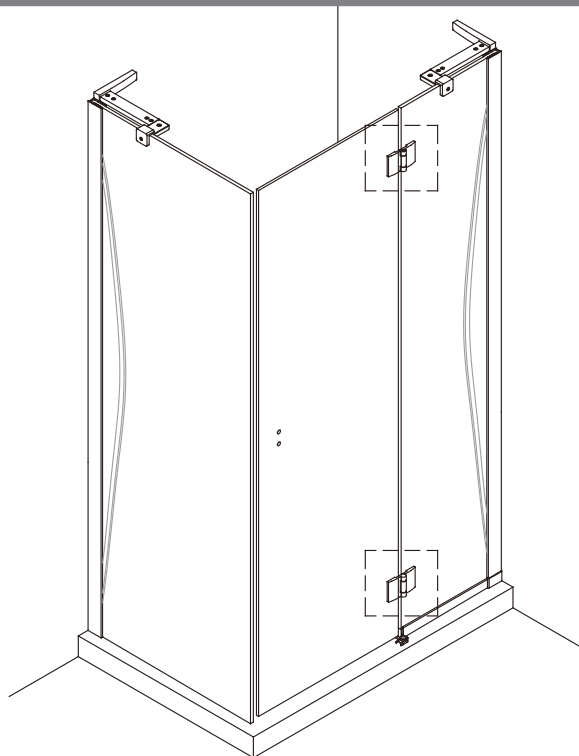


## Step 6

Depending on whether you have a right hand or left hand hinged door please select the correct diagram shown below for the fitting of the Water Channel, Water Channel Ends and Bottom Waterproof Strip.


1. Depending on left or right hand installation cut the redundant end of Bottom Waterproof Strip (W), cut off evenly the stepped section.
2. Insert Bottom Waterproof Strip (W) into Water Channel Middle (Y) with profile end to Non hinged side of door making sure it goes completely home into Water Channel End (AG) or (AH).
3. Slide Water Channel End (AE) or (AF) onto Bottom Waterproof Strip (W) and Water Channel Middle (Y) using silicone sealant on joint faces.
4. Slide Water Channel End (AG) or (AH) onto Bottom Waterproof Strip (W) and Water Channel Middle (Y) using silicone sealant on joint faces.
5. Insert completed assembly onto bottom of door and fit Plastic Seal Strip (X).

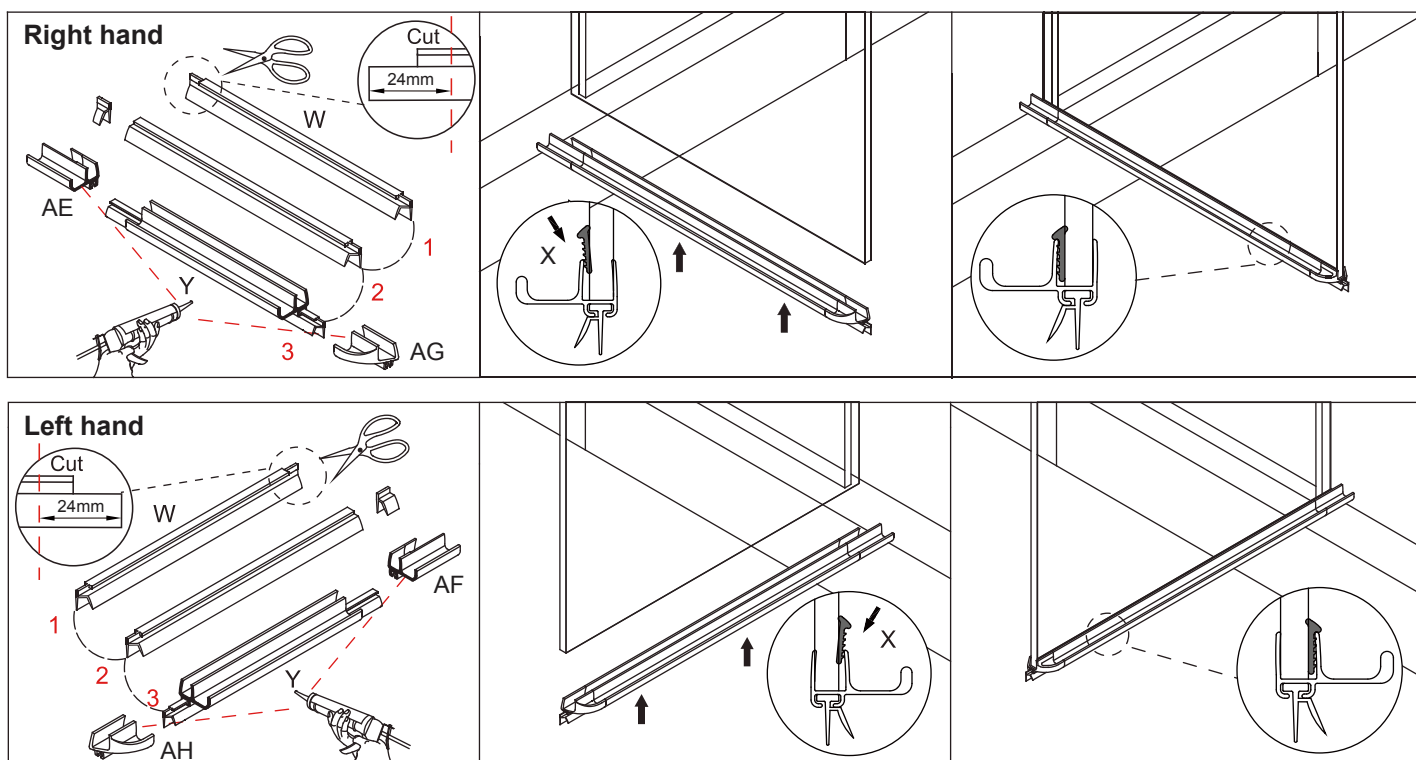


## Step 7

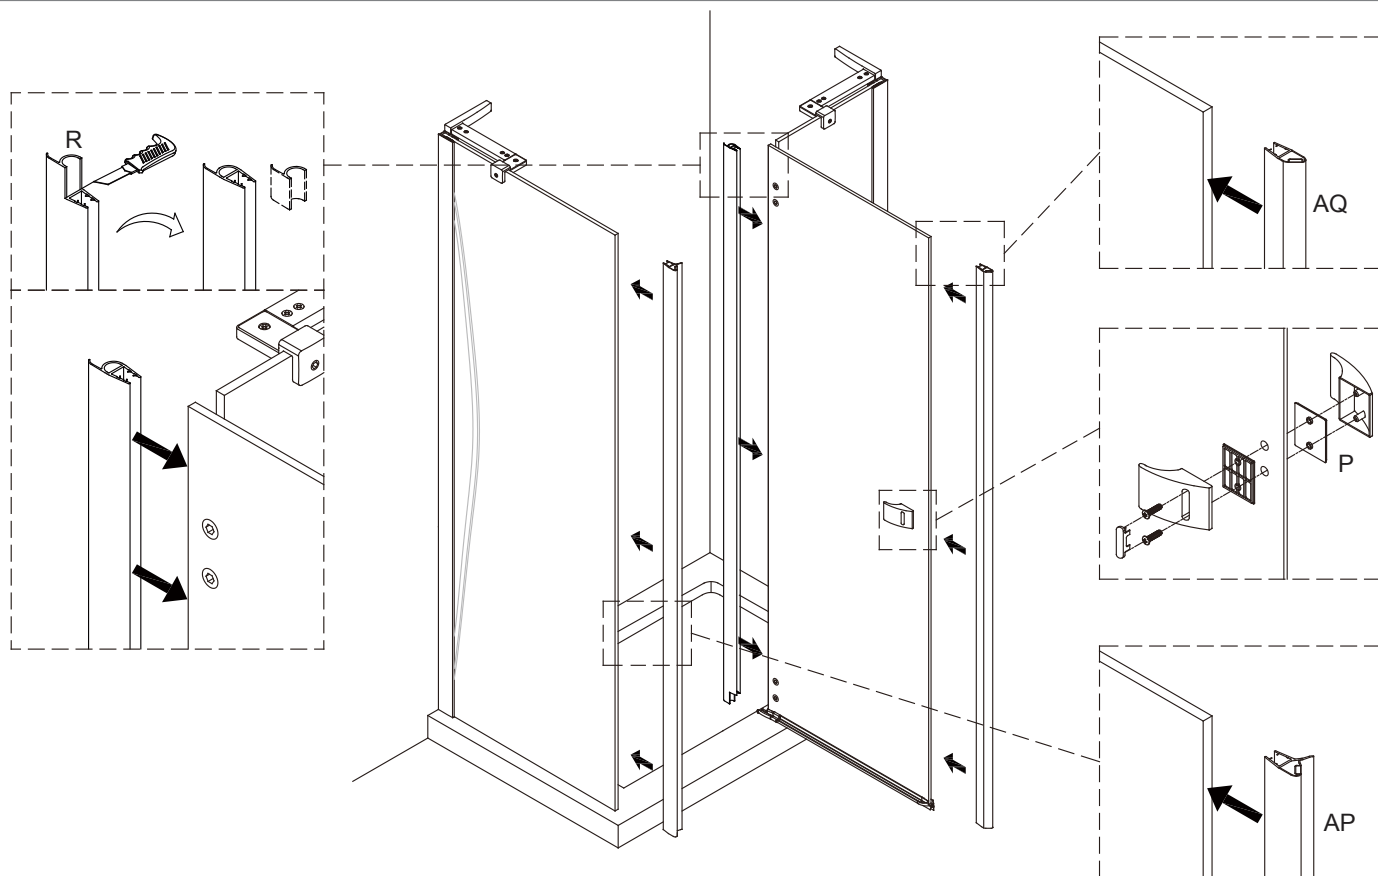


## Step 8

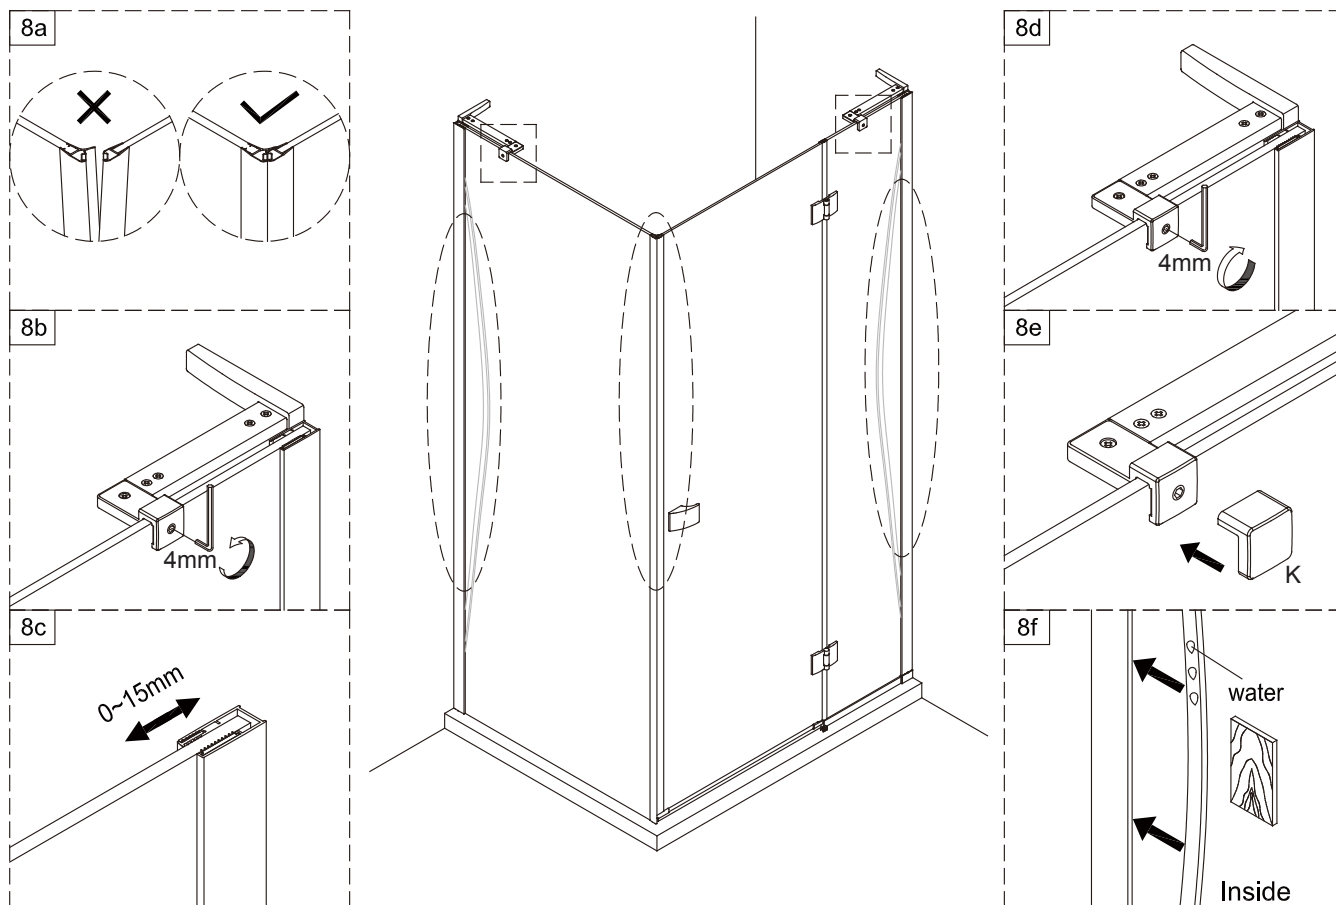

## Step 9

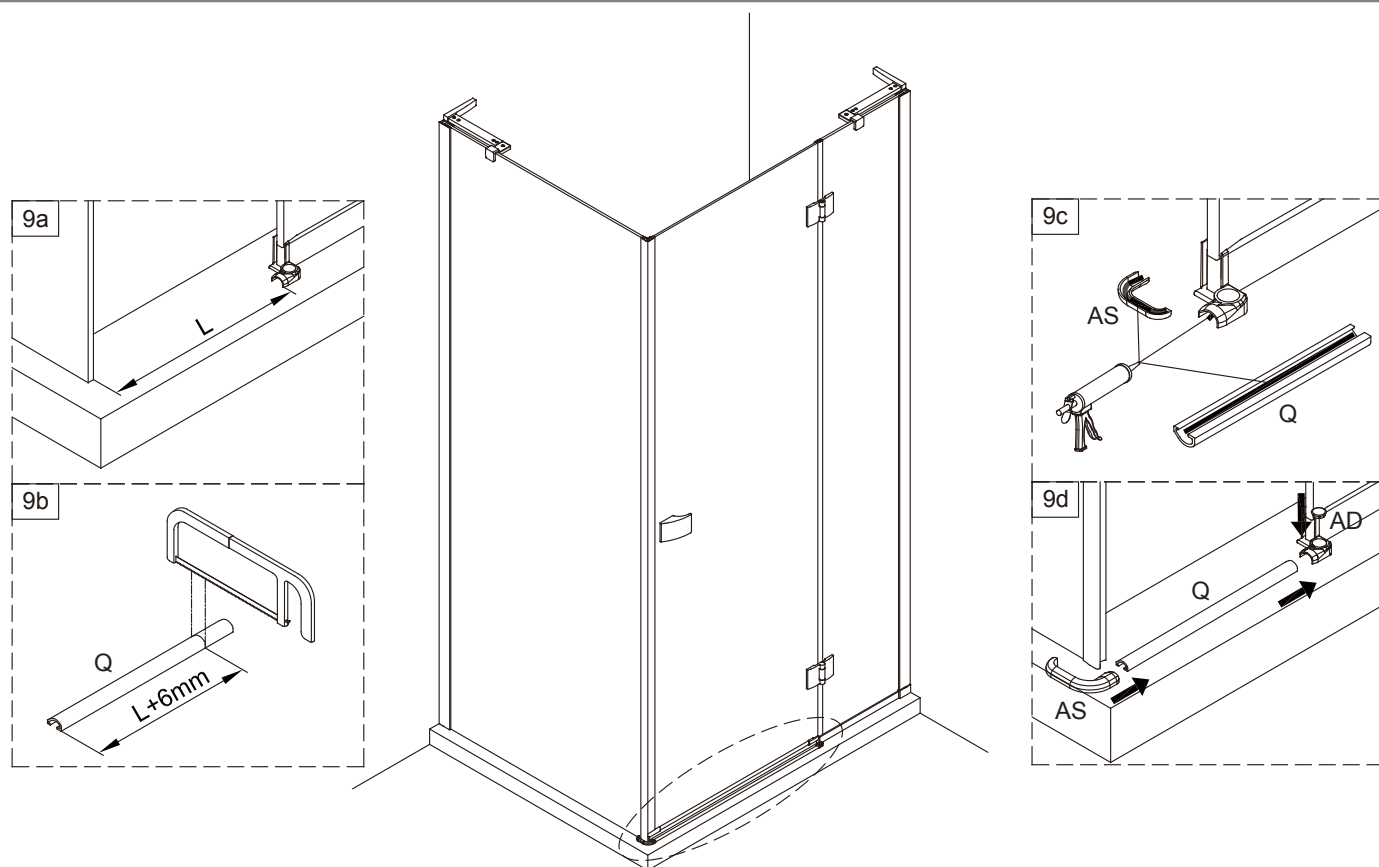


## Step 10

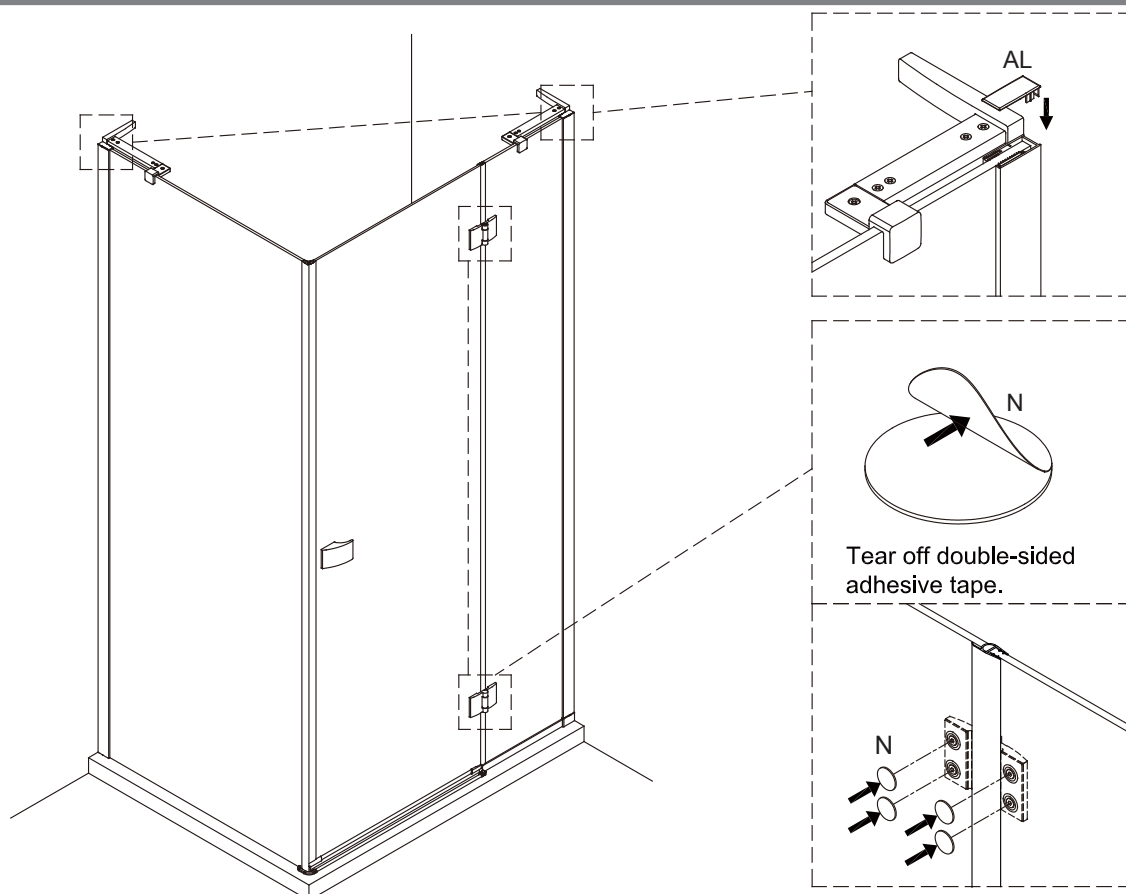



Step 11

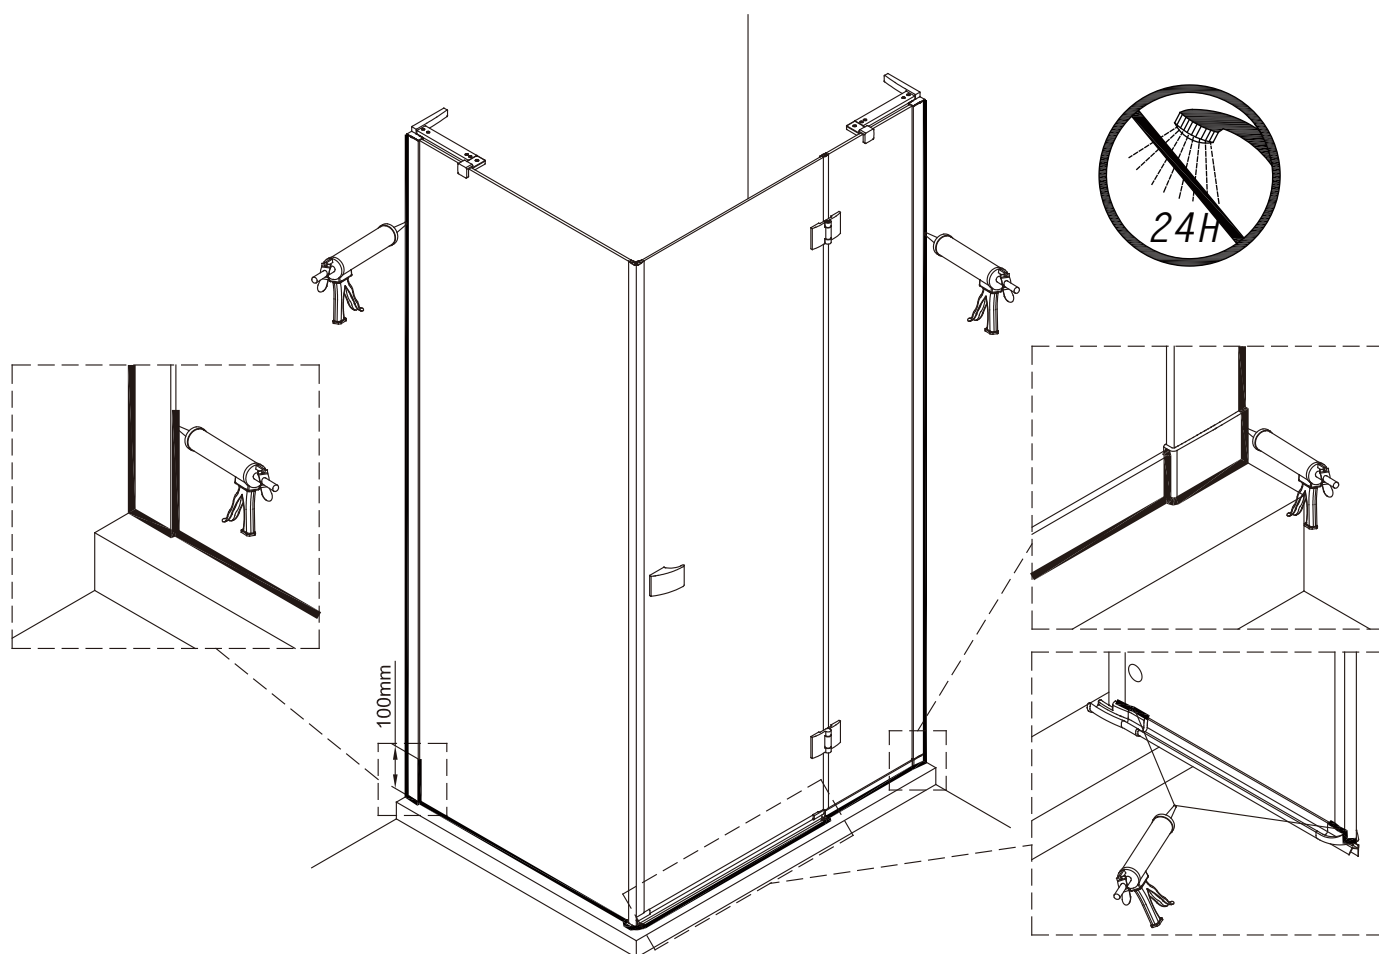

crosswater<sup>®</sup>  
SHOWERING

For any further information please contact Crosswater

Phone number, 0345 873 8840

Website, [crosswater.co.uk](http://crosswater.co.uk)

Email address, [sales@crosswater.co.uk](mailto:sales@crosswater.co.uk)

The manufacturer reserves the right to make technical modifications without prior notice.