


RDARM - Fitting Instructions

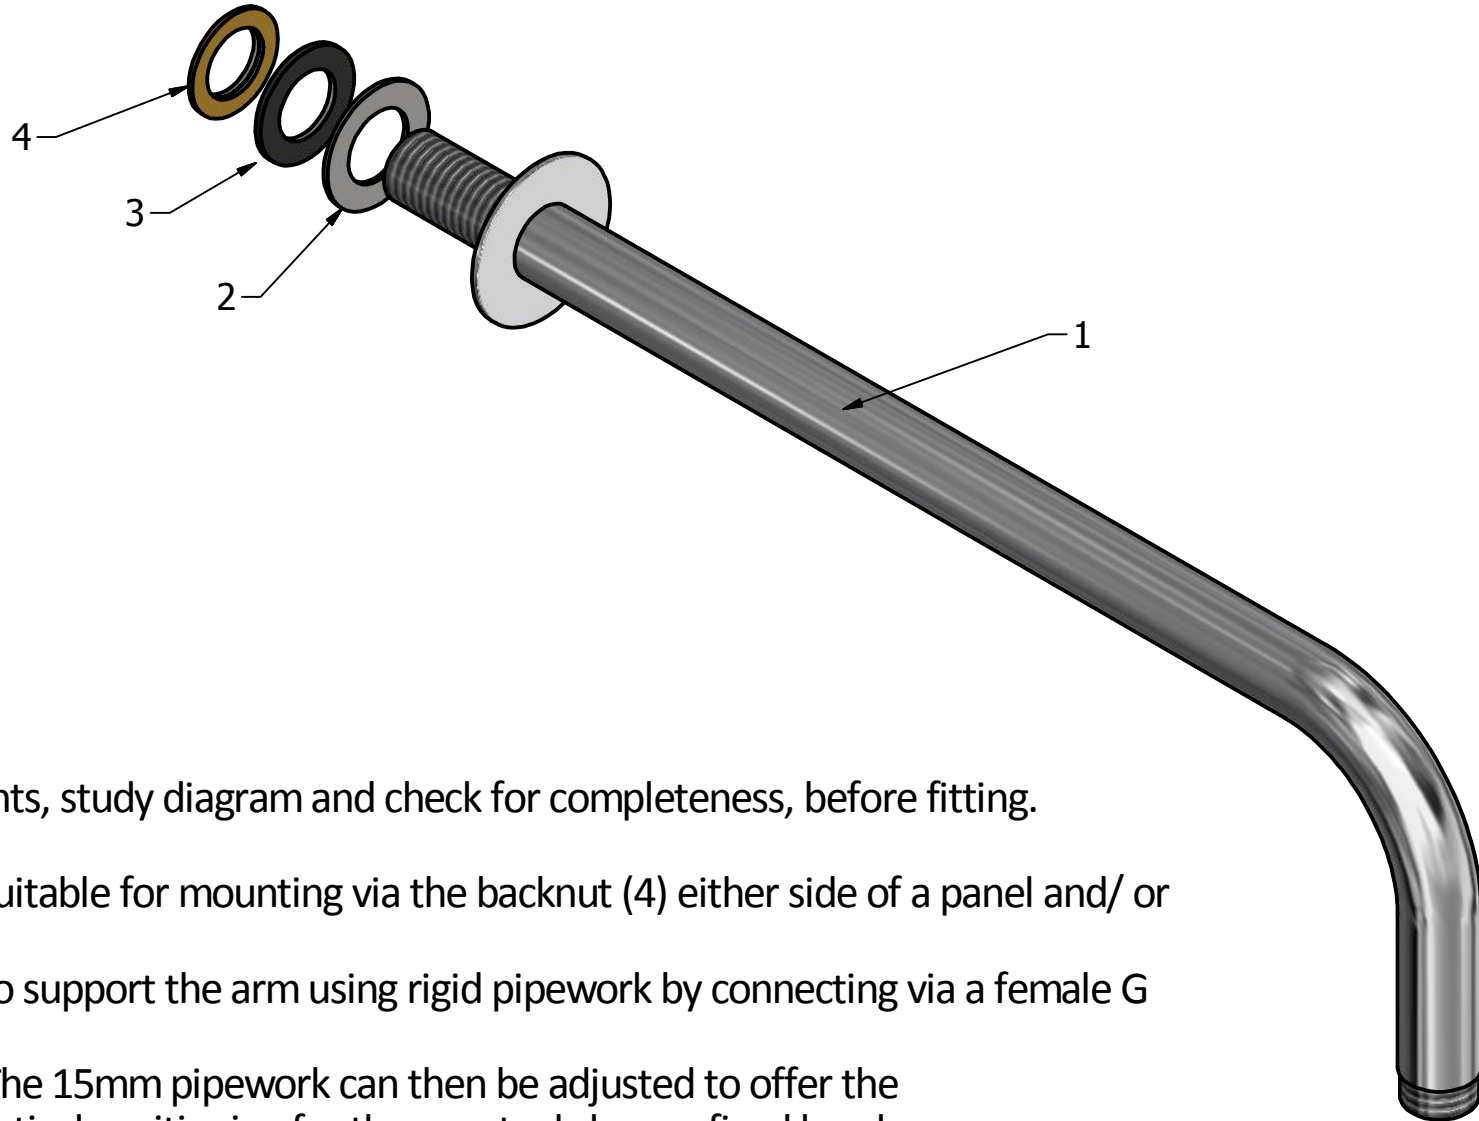

COMPONENTS

1. Shower Arm
2. Washer
3. Rubber washer
4. Backnut

INSTALLATION

1. Identify all components, study diagram and check for completeness, before fitting.
2. The arm (1) is most suitable for mounting via the backnut (4) either side of a panel and/ or tiles.
However it is possible to support the arm using rigid pipework by connecting via a female G $\frac{1}{2}$ in BSP to 15mm compression adaptor. The 15mm pipework can then be adjusted to offer the necessary depth and vertical positioning for the eventual shower fixed head.

NOTE: Before finishing wall turn on water supplier to check for leaking from Joints/connections..