

Installation Notes

*Base units can be secured to the wall if required using suitable angle brackets (not supplied).

*If you cut any part of the base unit during installation, it is essential that the cut surfaces are resealed with a suitable waterproof varnish, paint or sealant. Failure to adequately reseal may result in water damage for which the manufacturer cannot be held liable.


*Ceramic slab basins can be secured to the base units using silicone sealant (not supplied).

Hinge Adjustment

Hinges may require adjustment for both the doors to fit neatly together. This is achieved with the adjustable soft close hinges using the adjustment screws A and B (see Fig. 1). To access these you may first have to remove the screw cap cover. The hinges also feature a quick release mechanism to quickly and easily detach the door from the furniture frame, this is activated by pressing button C (see Fig. 1).

To make adjustment 1 (see Fig. 2) tighten/loosen adjustment screw A.

To make adjustment 2 (see Fig. 2) turn screw B.

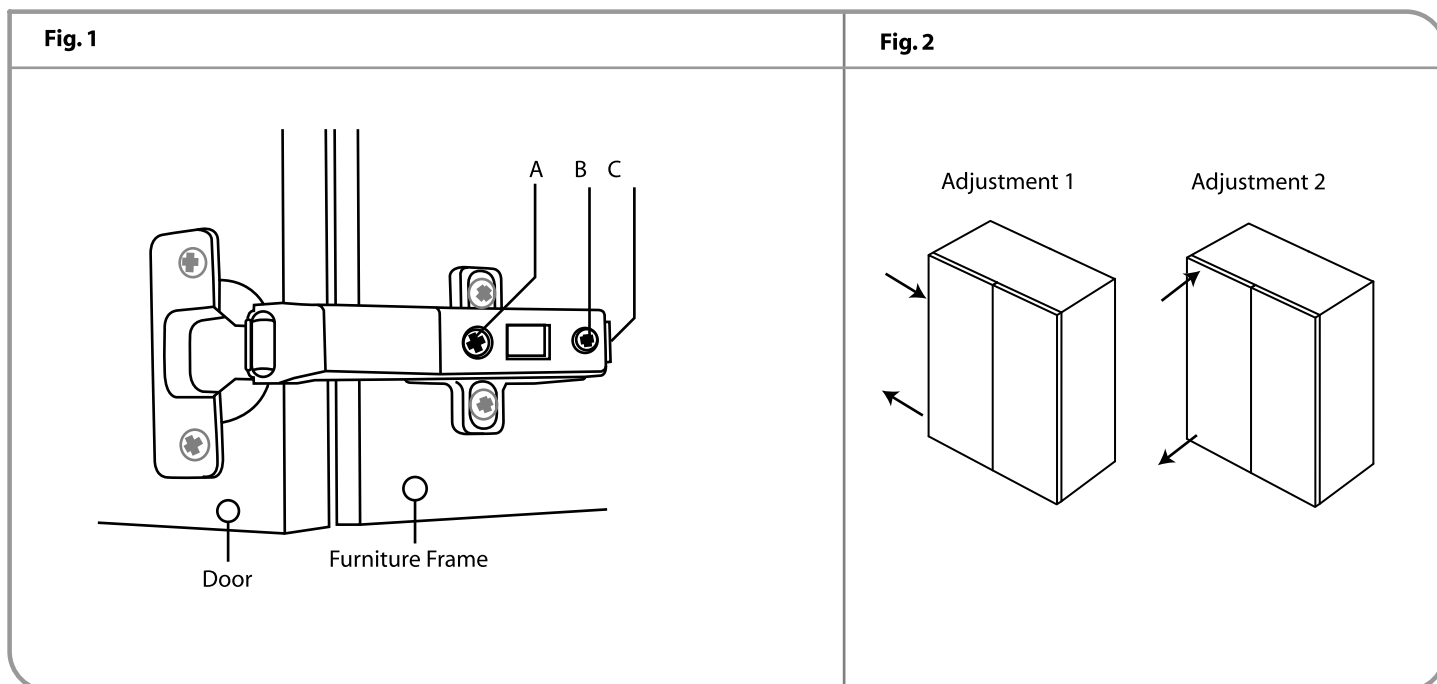

Fitting handle

The handle can simply be screwed into place using the screws supplied

Fitting ceramic basin

Once the basin has been plumbed in finish by securing to the washstand using a silicone sealant (not supplied).

Furniture Aftercare Instructions

As with all wooden furniture, this product should be treated with care.

We recommend...

Wipe away any water splashes or condensation after use. Excessive exposure to water will deteriorate the furniture.

All bathrooms should be well ventilated with a suitable extractor fan.

Clean with a soft damp cloth only.

Use a wax free polish if one must be used.

For removal of lime scale deposits use a suitable proprietary cleaner. If necessary test on an inconspicuous area first.

Please DO NOT...

Do not scrub or scour

Do not use abrasive cleaning agents

Replacement components - Should you require any replacement components for this product please contact Roper Rhodes using the contact details below.