
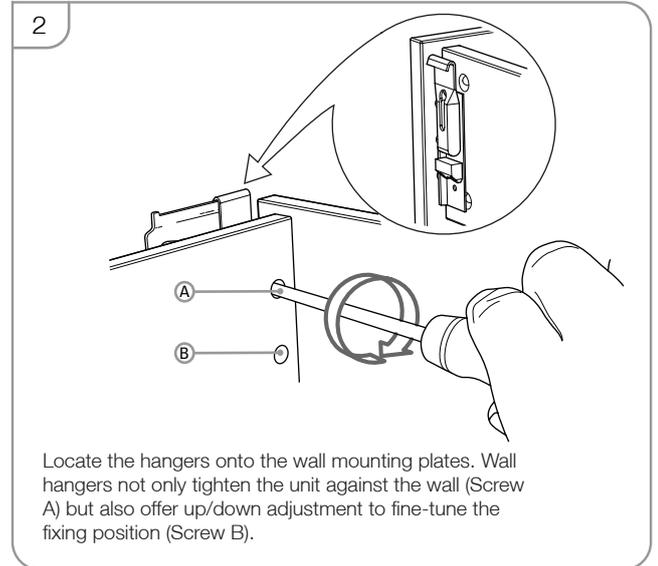


Please retain for future reference




#### Before you start

It is recommended that the unit and basin are secured to a suitably reinforced wall to ensure stability. The wall plugs supplied are only suitable for solid stone / brick walls. For plasterboard walls use specialist wall plugs along with supplementary wall strengthening as units can be very heavy. Seek advice from a specialist about the suitability of fixings to be used. Wear suitable eye protection when drilling. Take care when using power tools near water - the use of a residual current device (RCD) is recommended. Beware of hidden pipes or cables. Take care when drilling tiled surfaces as the drill might slip. Use a piece of masking tape to prevent the drill from wandering.

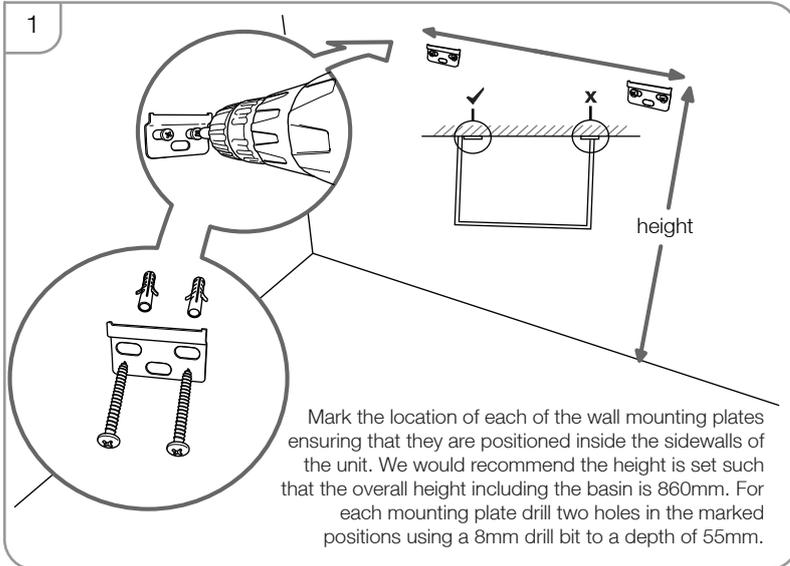

#### Fascia Adjustment


Fascias may require adjustment for correct alignment. If adjustment is required follow instructions below.

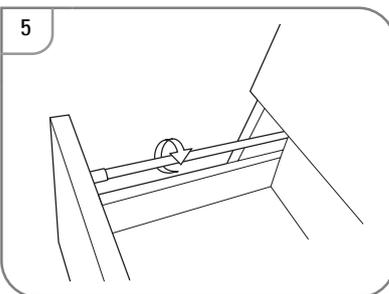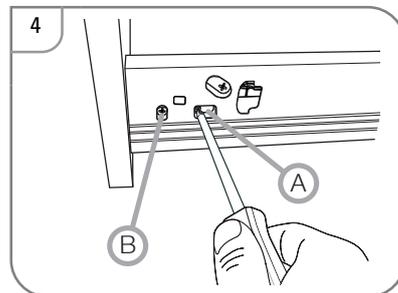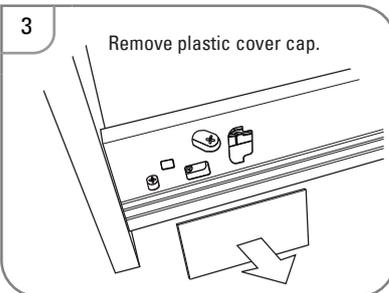

To make adjustment 1 (Up and Down) turn screw A (see Drawing 4)

To make adjustment 2 (Left and Right) turn screw B (see Drawing 4)

To make adjustment 3 (In and Out) adjust rail (see Drawing 5)

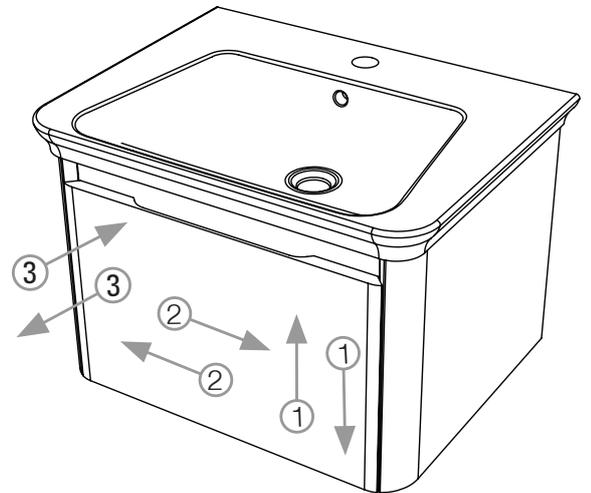

#### Fitting ceramic basin

Once the basin has been plumbed in finish by securing to the washstand using a silicone sealant (not supplied).

#### We recommend...

Wipe away any water splashes or condensation after use. Excessive exposure to water will deteriorate the furniture.

All bathrooms should be well ventilated with a suitable extractor fan.

Clean with a soft damp cloth only.

Use a wax free polish if one must be used.

For removal of lime scale deposits use a suitable proprietary cleaner. If necessary test on an inconspicuous area first

#### Please DO NOT...

Do not scrub or scour

Do not use abrasive cleaning agents


#### Replacement components

Should you require any replacement components for this product please contact Tavistock using the contact details below.


#### Removing the drawers / fascia

If faulty or damaged, the fascias can be removed and replaced. To remove the Drawer and Fascias please follow the instructions below:


6 Remove the rectangular cap.

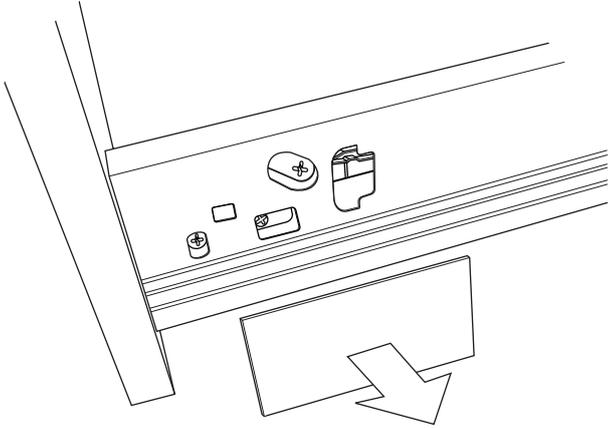


7 Squeeze the lever on each side of the drawer to release from runner

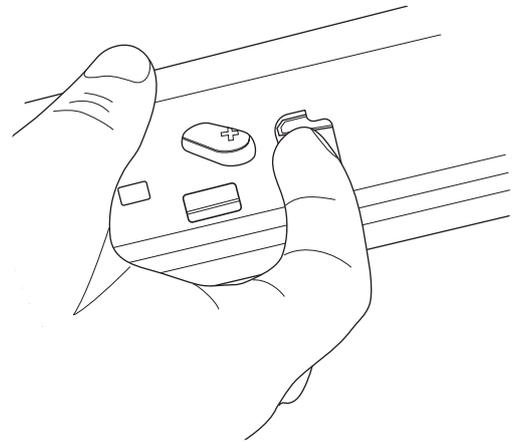


8 Gently slide the drawer outwards and upwards to remove fully from runner.

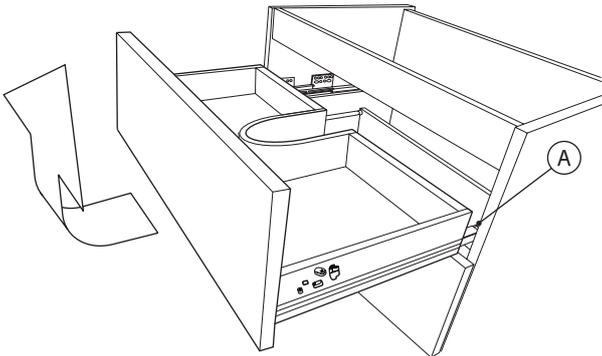



9 Unscrew the CAM screw on the underside of the drawer

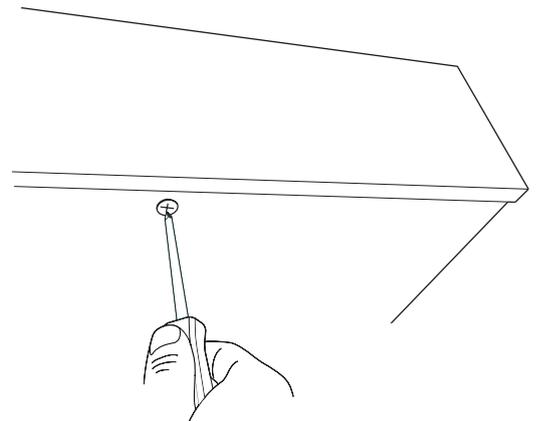

10 Release the fascia using a screwdriver.

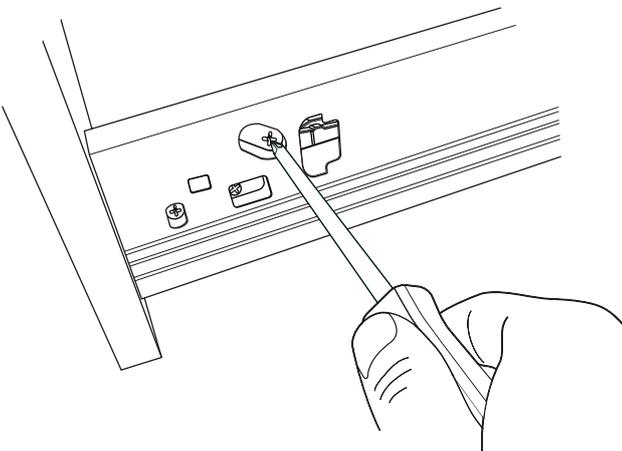

11 Release the adjustment rail (diagram 12) then pull the fascia away from the body of the drawer.

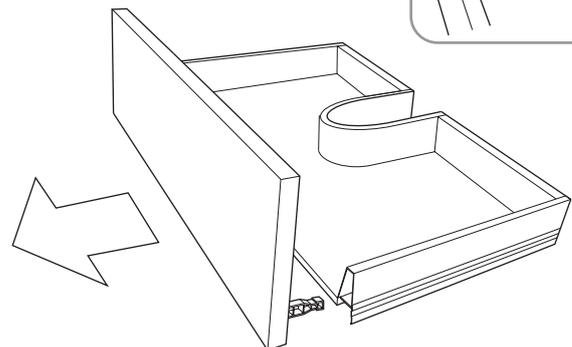

**NOTE** - When replacing the drawers back on their runners ensure they have been 'clicked' back into position at point A in diagram 6 (on both sides)