

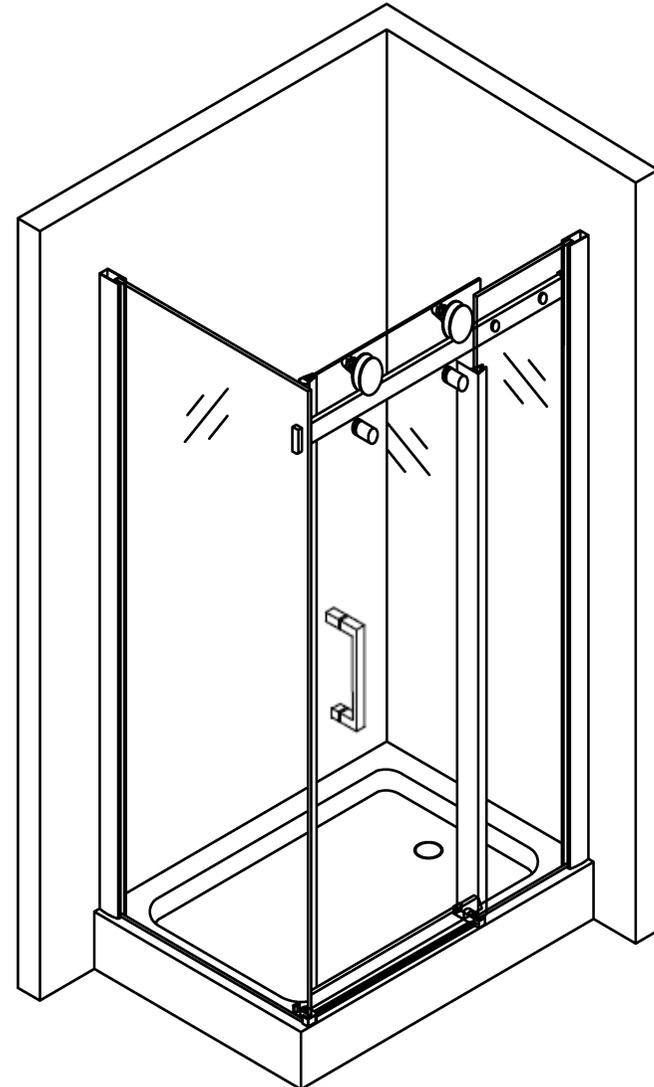
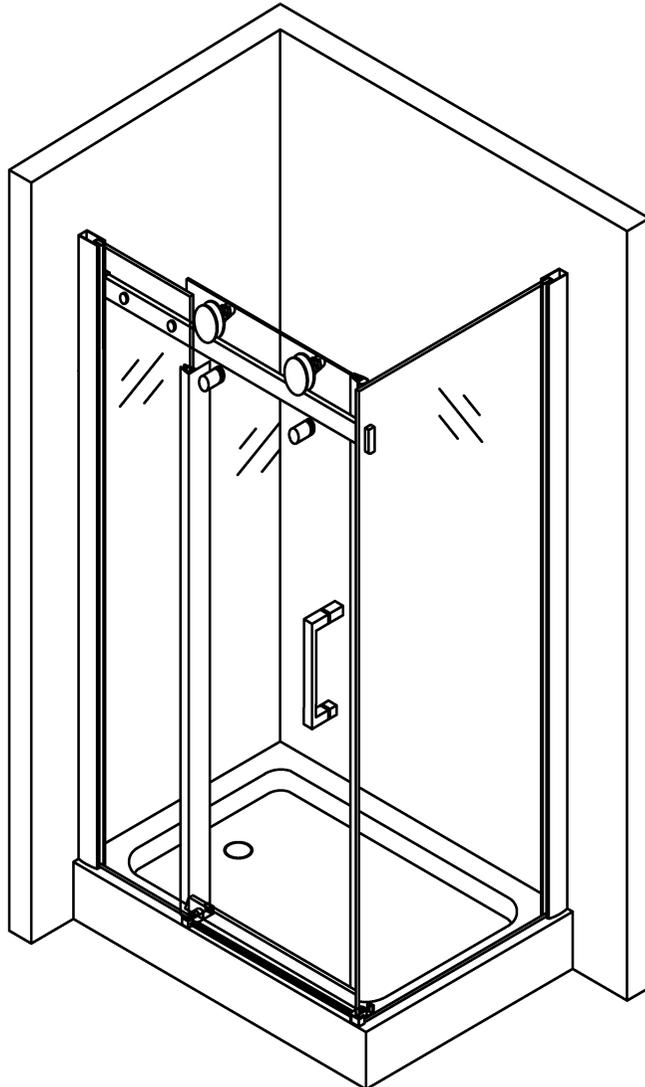
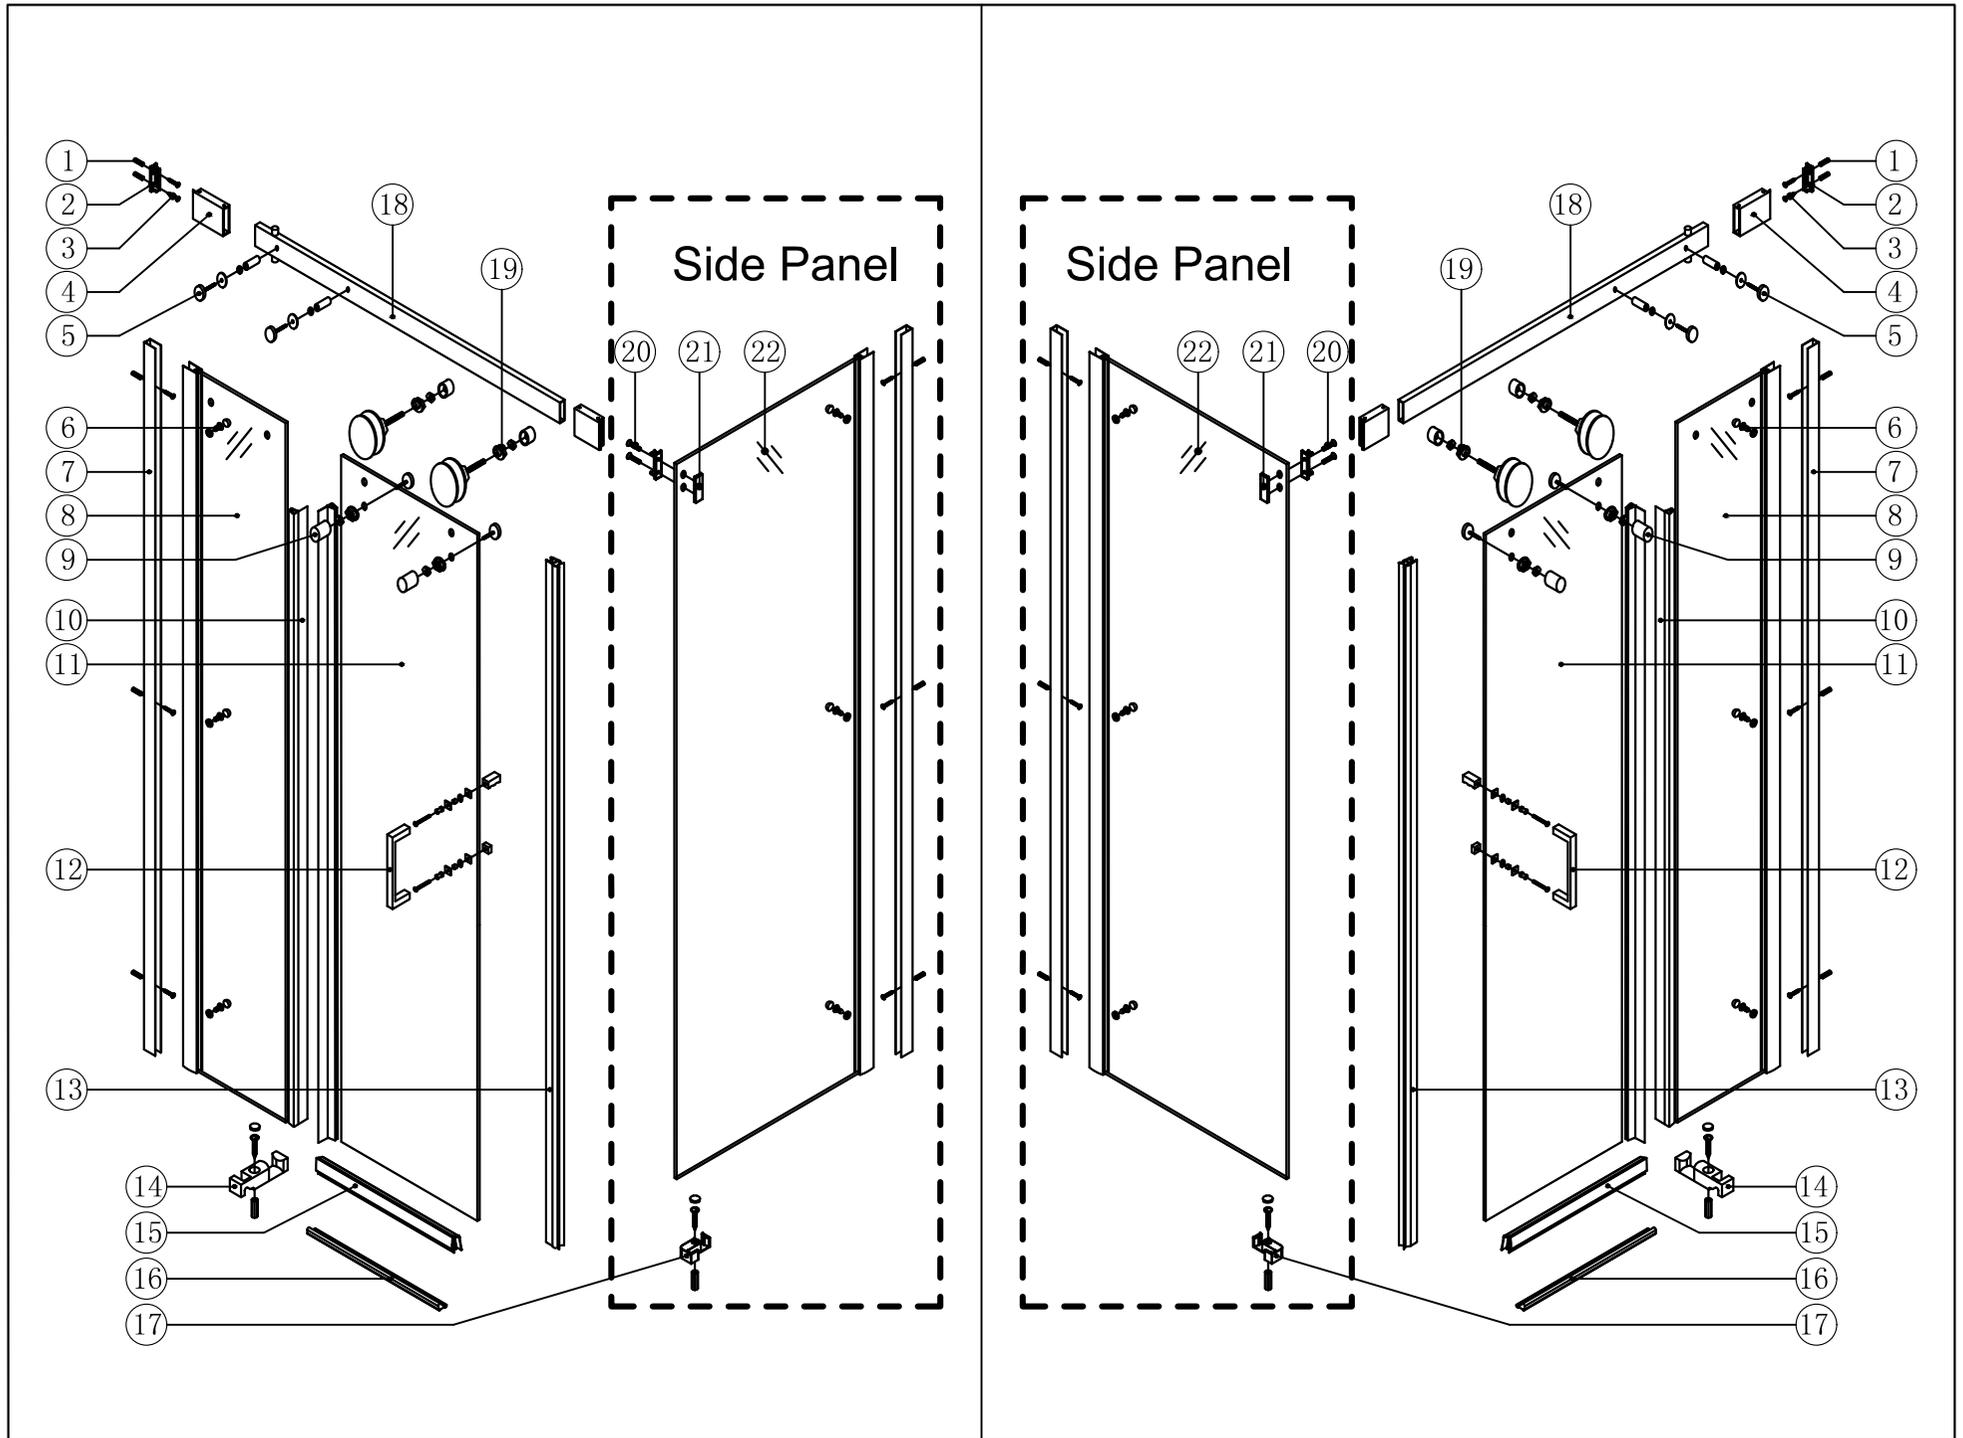

















Installation Instructions


RB6A101700, RB6A101800, RB6A101900






1  D6x30 10Pcs	2  B1-D11B 2Pcs	3 ST4X30  ST4X30 10Pcs	4  B1-D02B 2Pcs	5  B1-D03B 2Pcs	6  ST4X12B 6Pcs									
7  B1-B01B 2Pcs	8  B1-D05B 1Pc	9  B1-D04B 2Pcs	10  B1-H01B 2Pcs	11  B1-D05B 1Pc	12  B1-D05B 1Pc									
13  B1-H07B 1Pc	14  B1-D06B 2Pcs	15  B1-H10B 1Pc	16  B1-B06B 1Pc	17  B1-D15B 2Pcs	18  B1-F08B B1-F09B B1-F10B B1-F11B 1Pc									
19  B1-D07B 2Pcs	20  M5X10 2Pcs	21  B1-D16B 1Pc	22  B1-D05B 1Pc	<table border="1"> <tr> <td rowspan="4">18</td> <td>1000</td> <td>B1-F08B</td> </tr> <tr> <td>1200</td> <td>B1-F09B</td> </tr> <tr> <td>1400</td> <td>B1-F10B</td> </tr> <tr> <td>1600</td> <td>B1-F11B</td> </tr> </table>		18	1000	B1-F08B	1200	B1-F09B	1400	B1-F10B	1600	B1-F11B
18	1000	B1-F08B												
	1200	B1-F09B												
	1400	B1-F10B												
	1600	B1-F11B												

Tools:

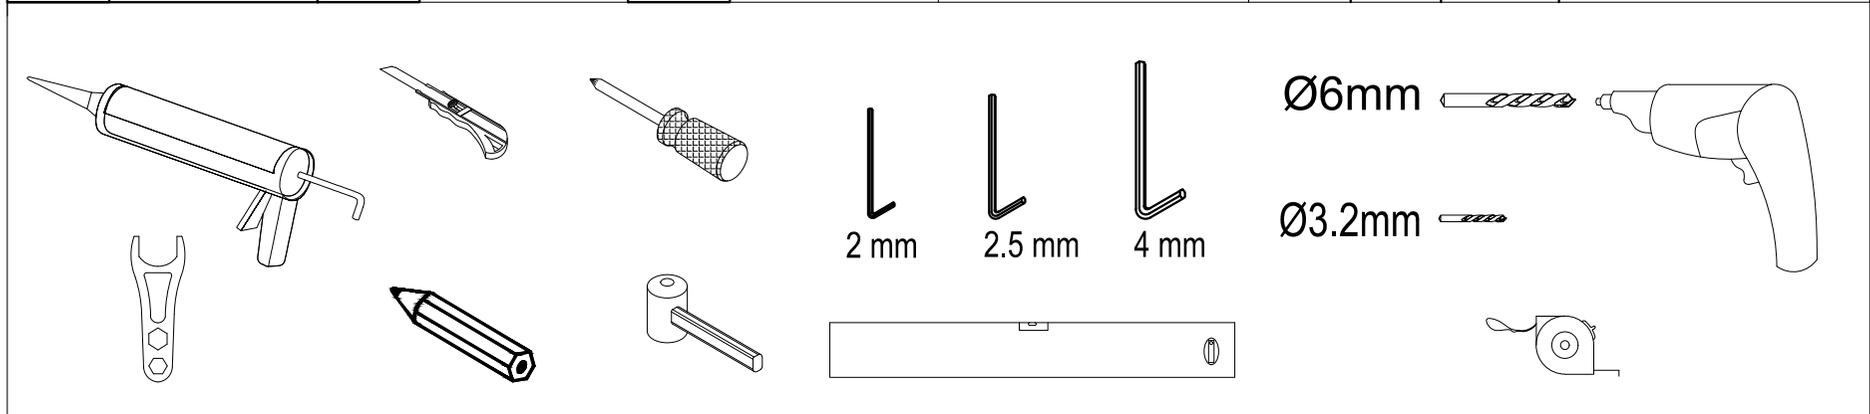

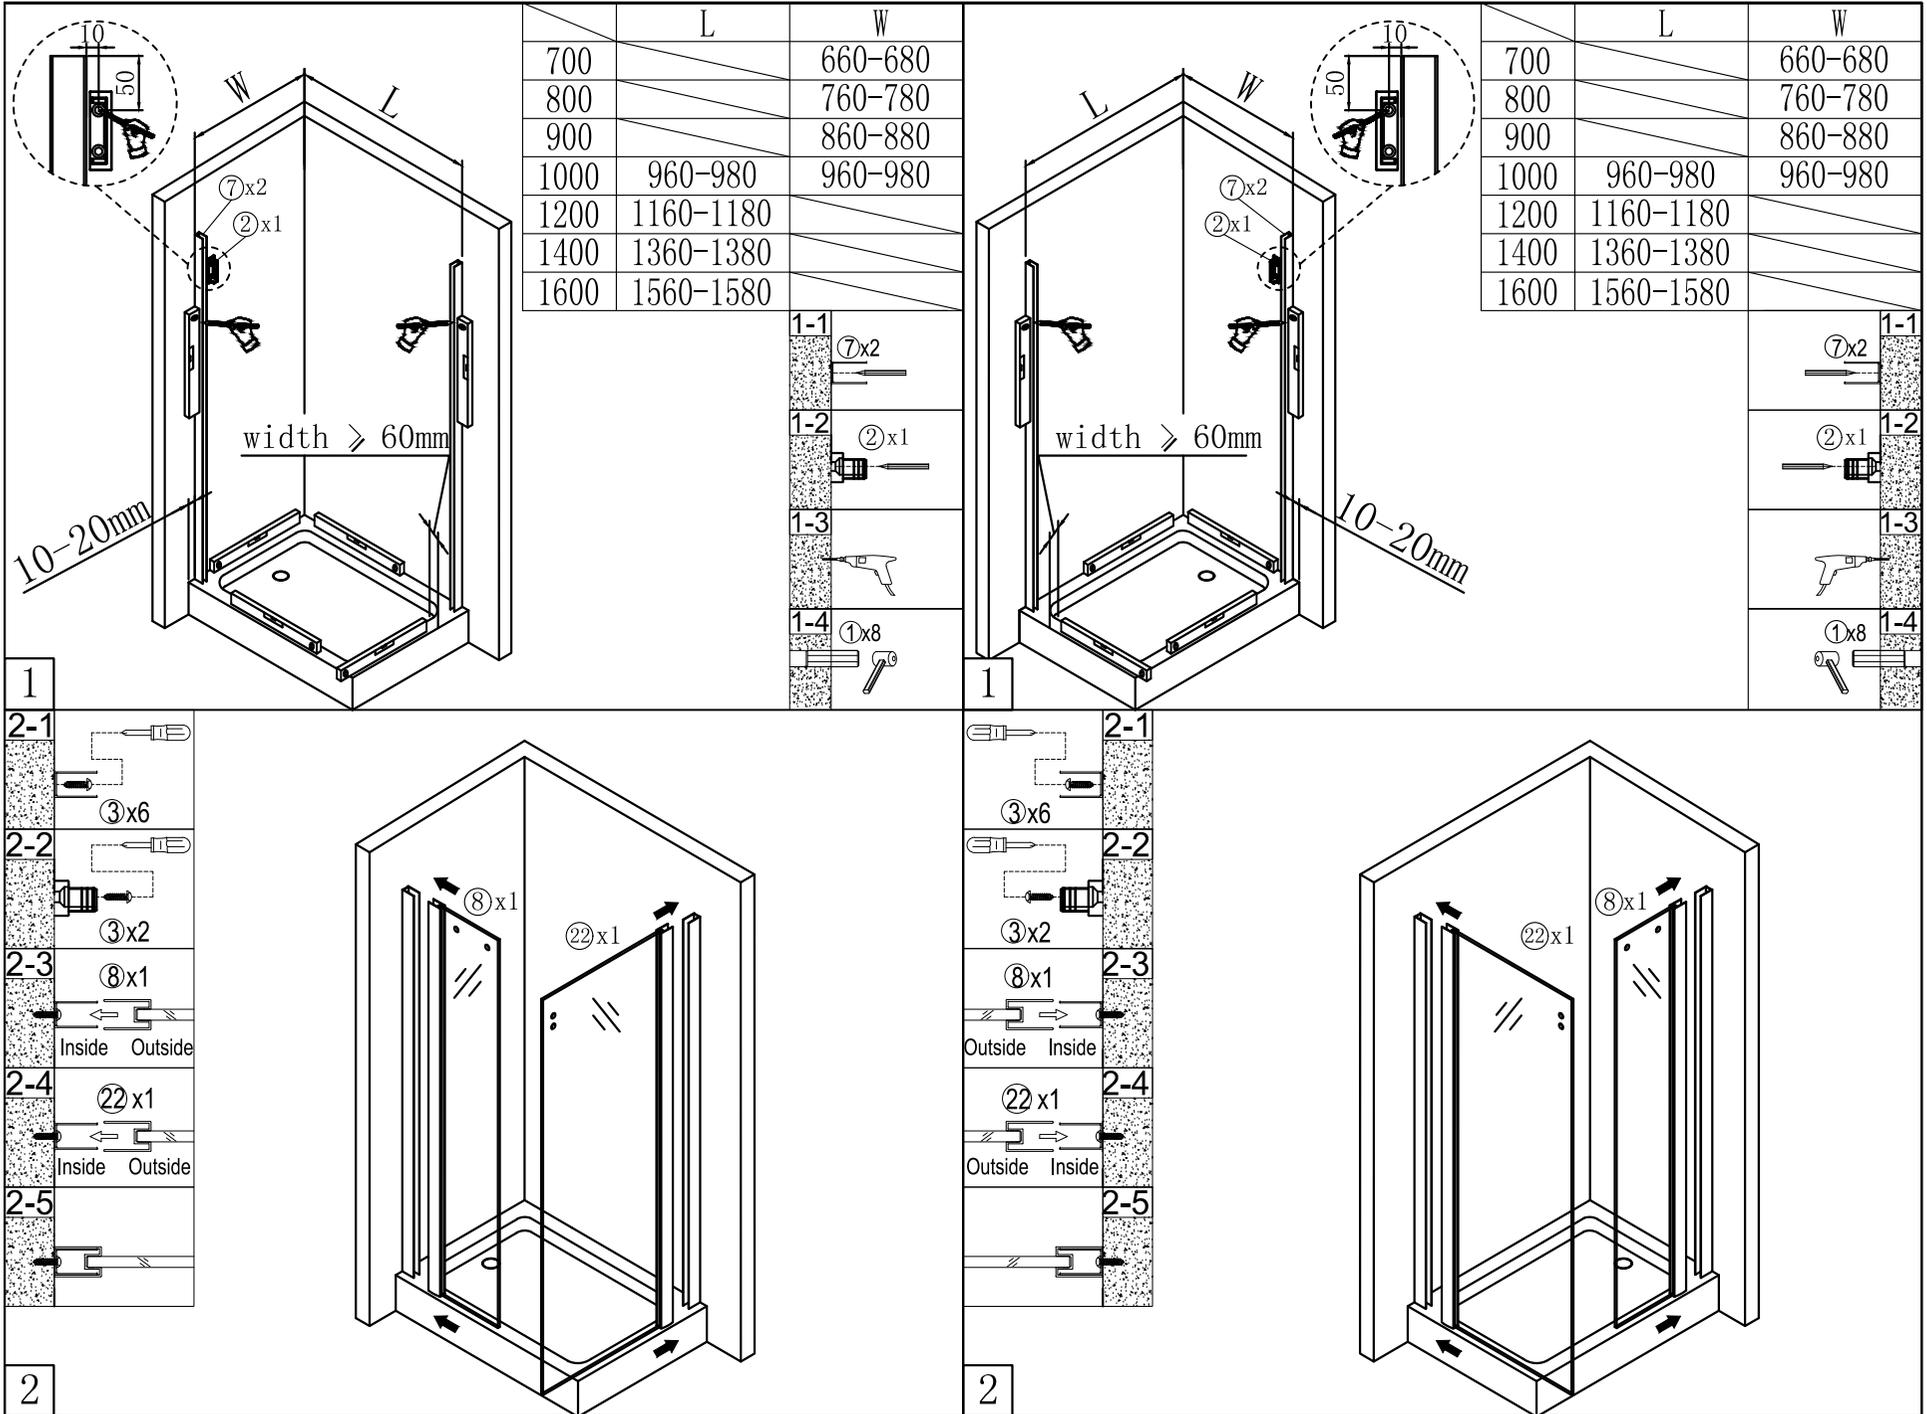

	L	W
700		660-680
800		760-780
900		860-880
1000	960-980	960-980
1200	1160-1180	
1400	1360-1380	
1600	1560-1580	


	L	W
700		660-680
800		760-780
900		860-880
1000	960-980	960-980
1200	1160-1180	
1400	1360-1380	
1600	1560-1580	



- 1-1 7x2
- 1-2 2x1
- 1-3 1-3
- 1-4 1x8


- 1-1 7x2
- 1-2 2x1
- 1-3 1-3
- 1-4 1x8



- 1
- 2-1 3x6
- 2-2 3x2
- 2-3 8x1
- 2-4 22x1
- 2-5 22x1

- 1
- 2-1 3x6
- 2-2 3x2
- 2-3 8x1
- 2-4 22x1
- 2-5 22x1

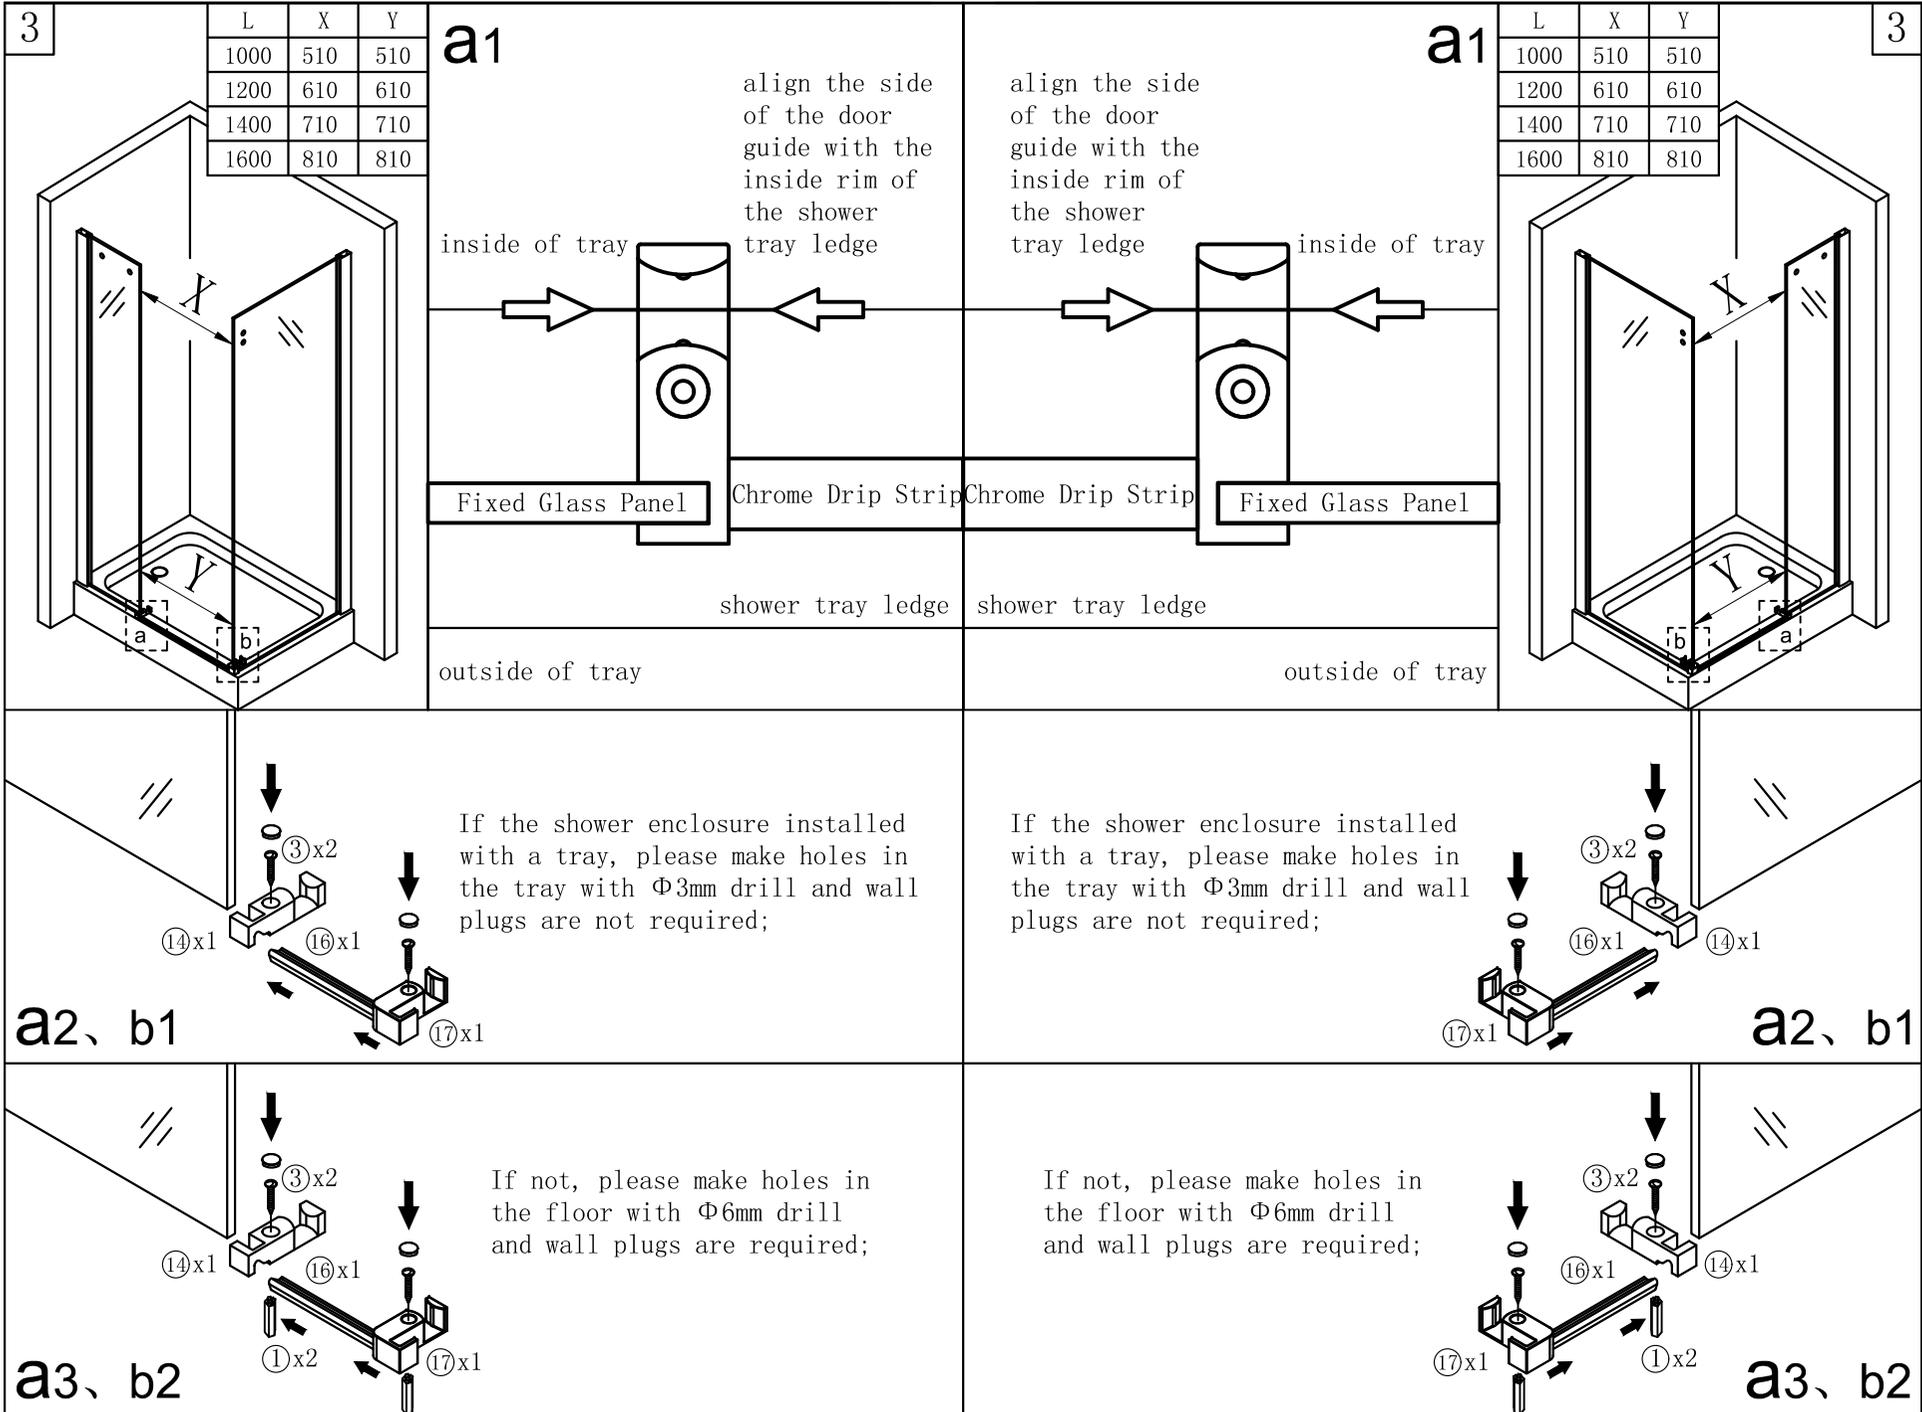


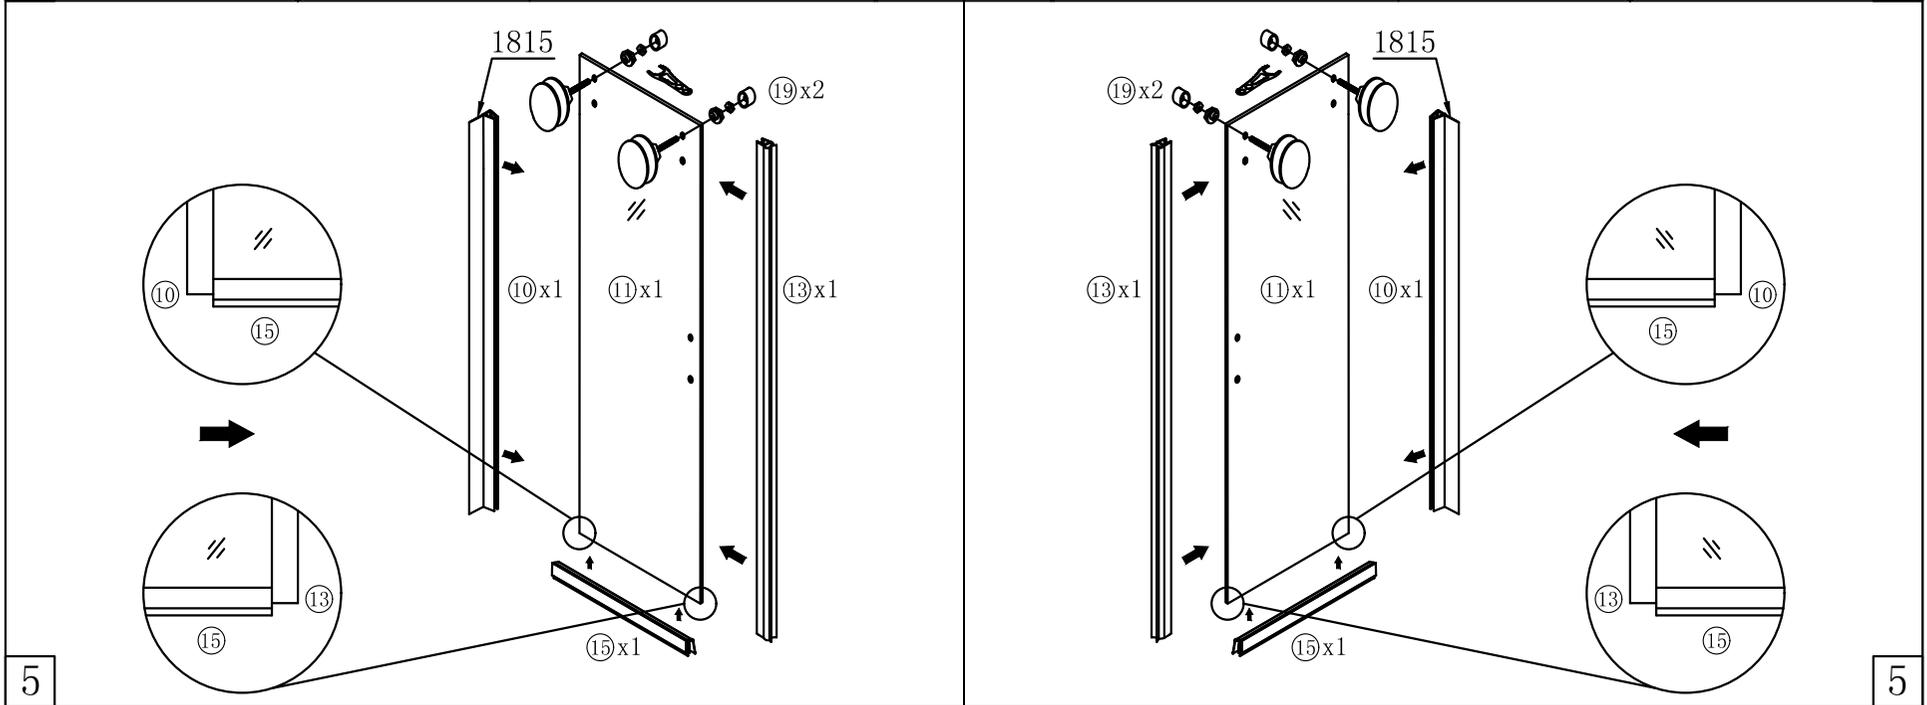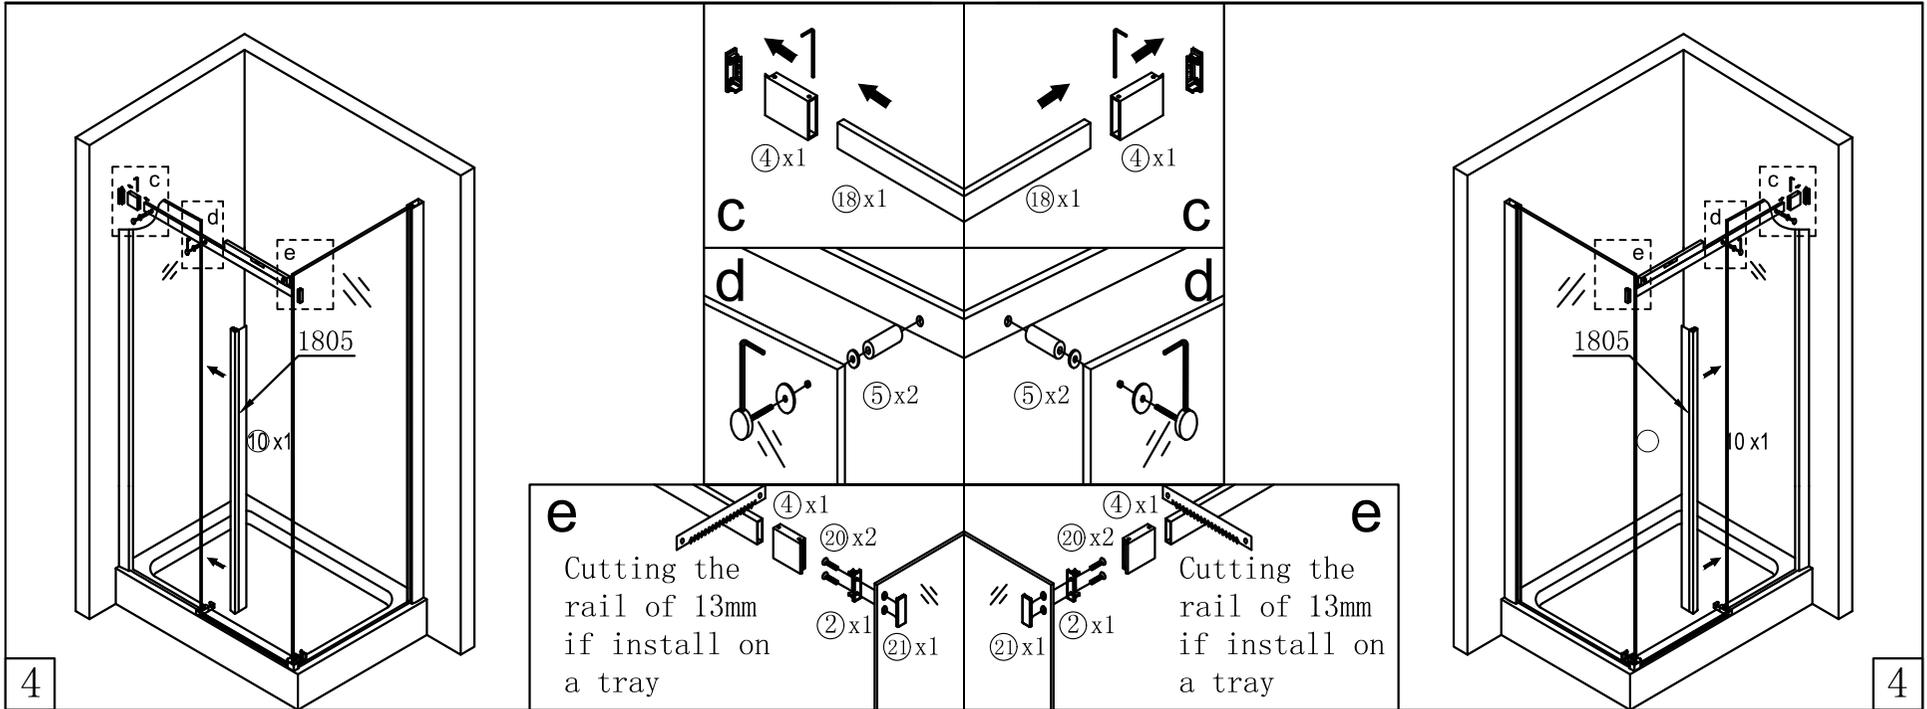

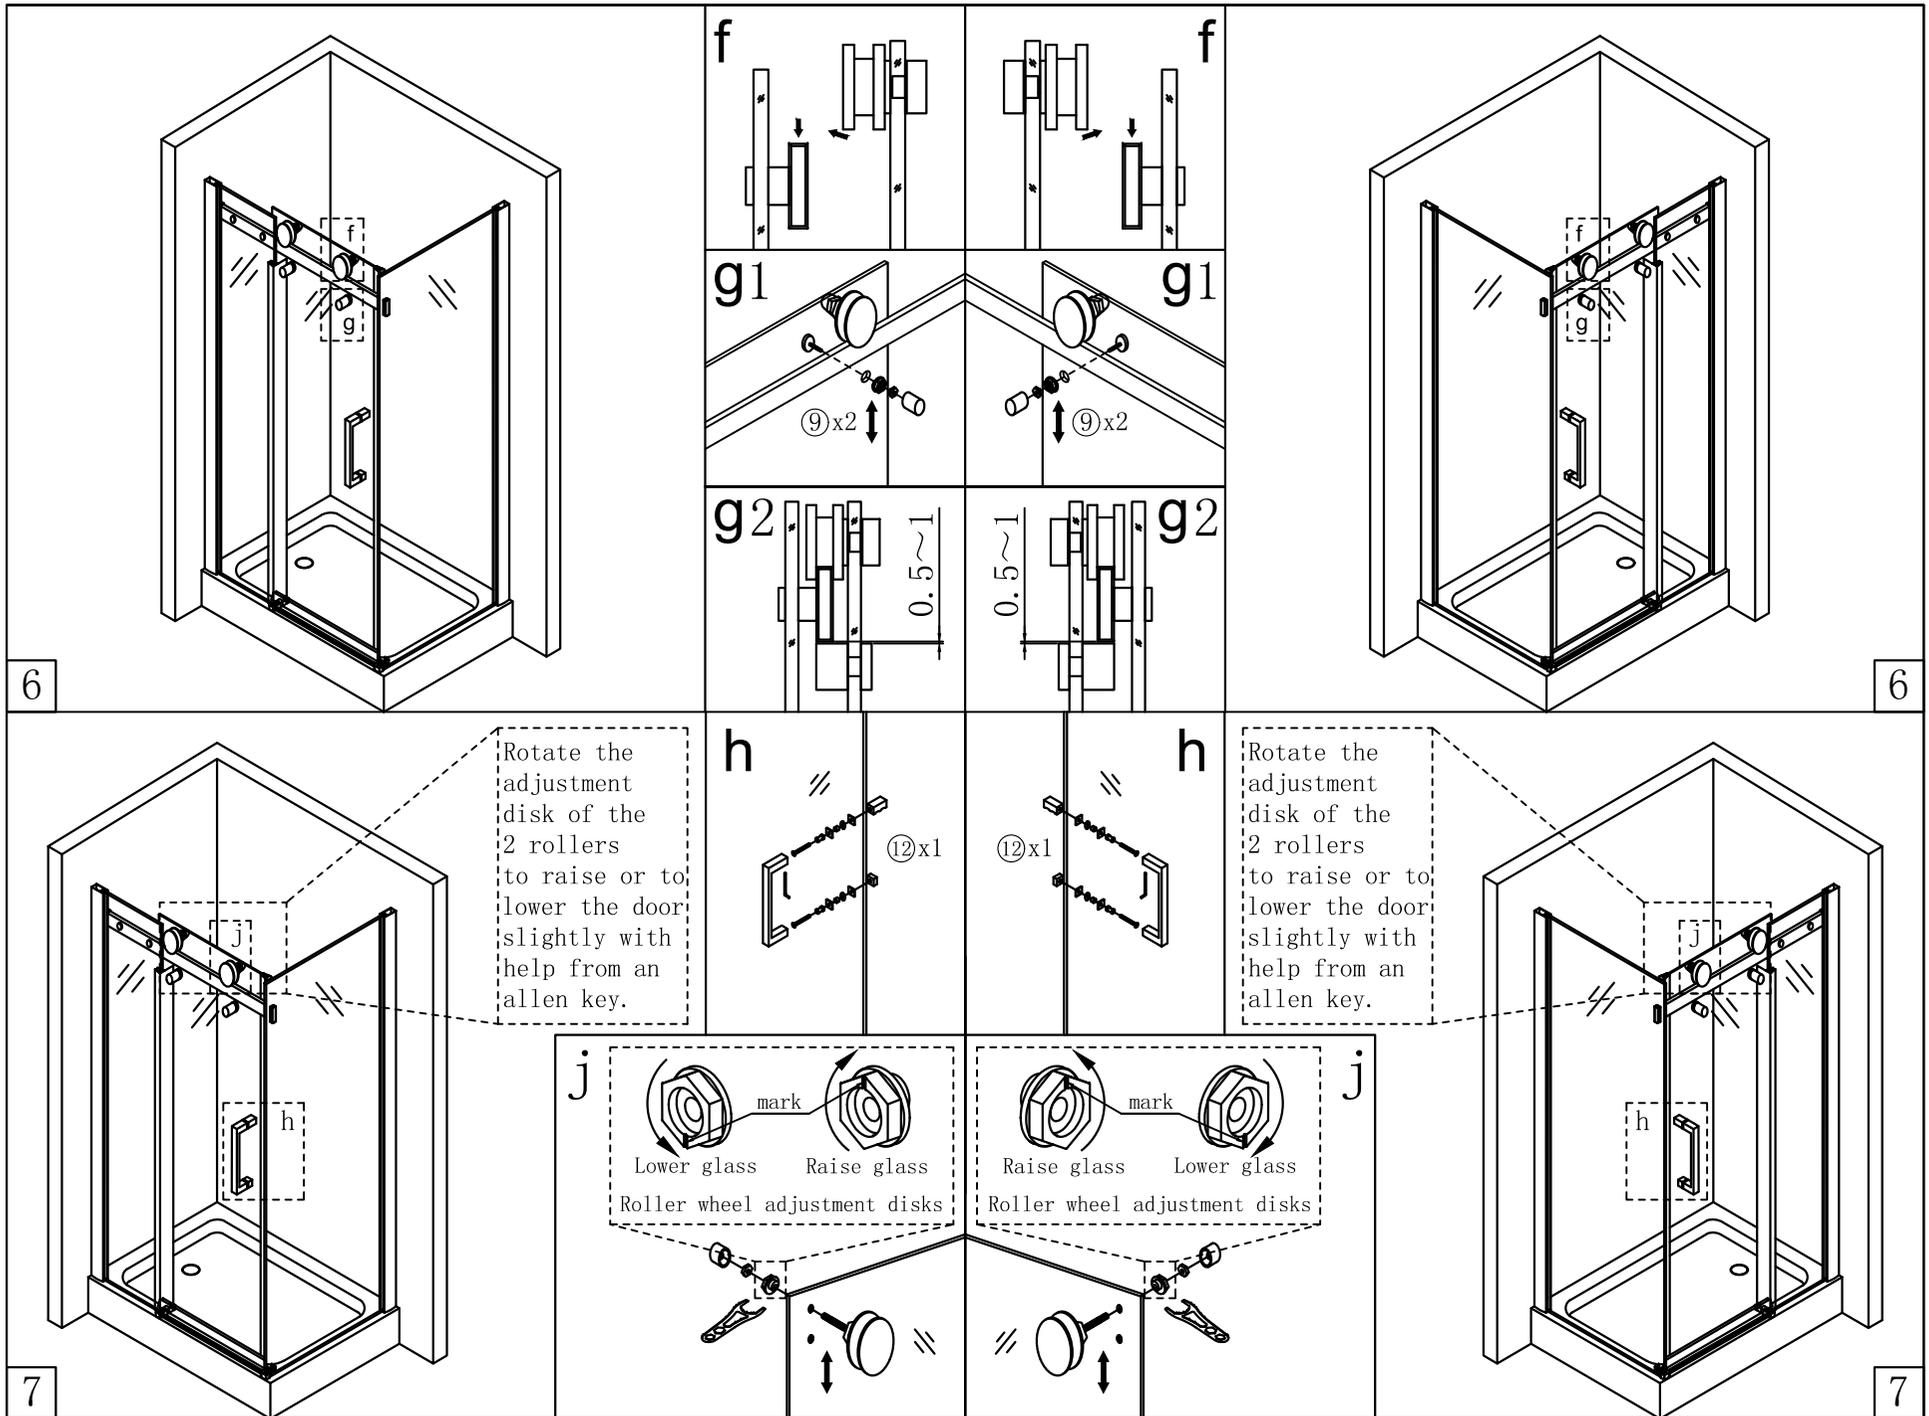

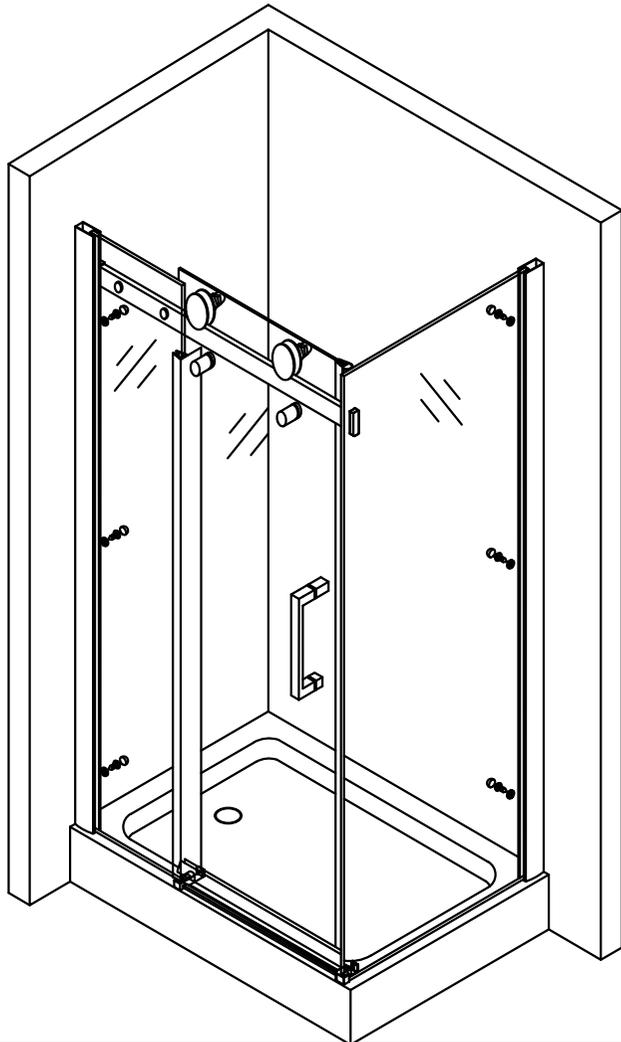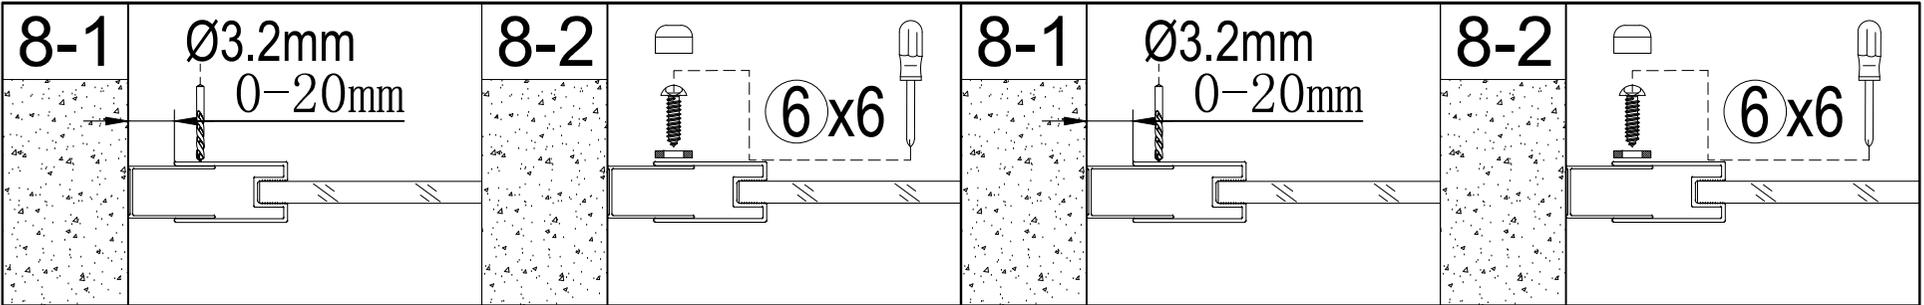

8

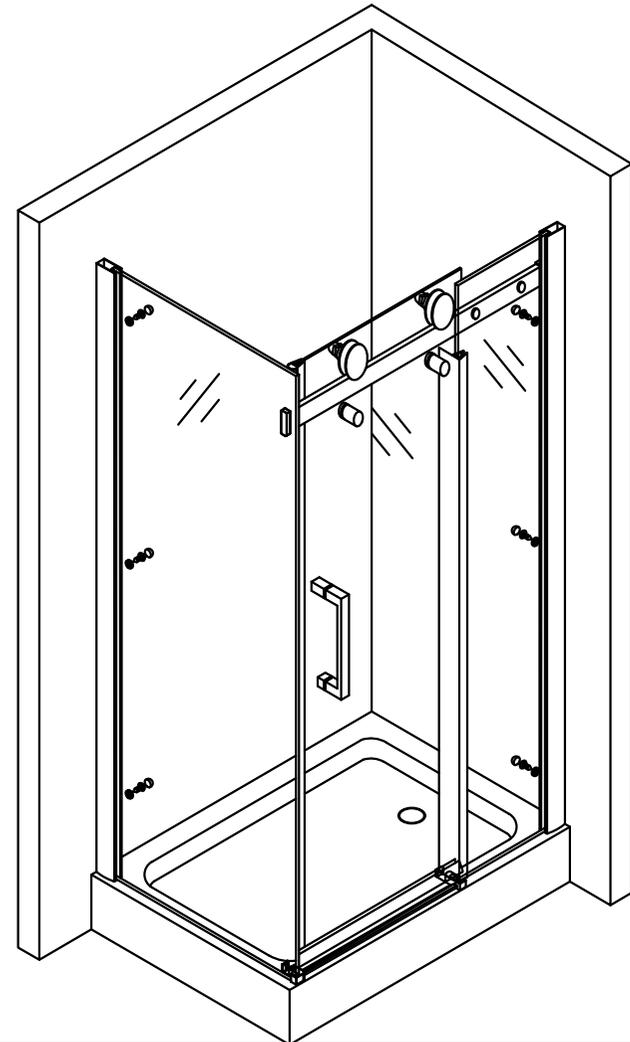


8




Care Instructions:

Do not use your shower enclosure within 24 hours of assembly . Do not use caustic cleaning products or abrasive material when cleaning your shower enclosure.

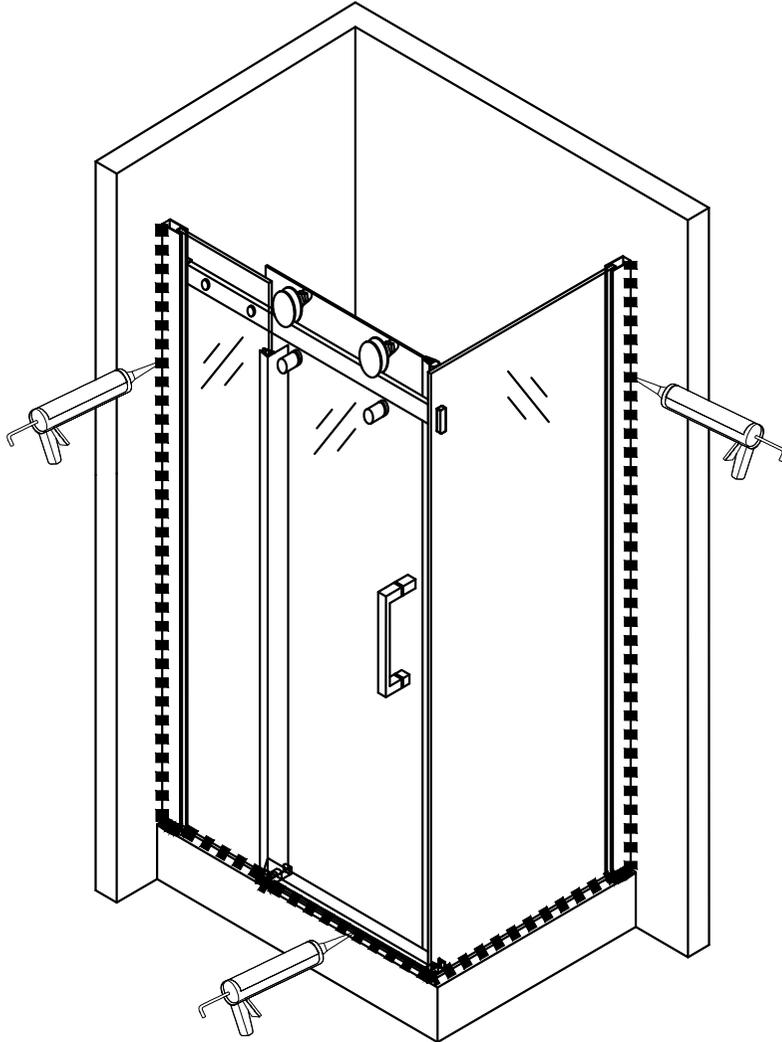

Care Instructions:

Do not use your shower enclosure within 24 hours of assembly . Do not use caustic cleaning products or abrasive material when cleaning your shower enclosure.

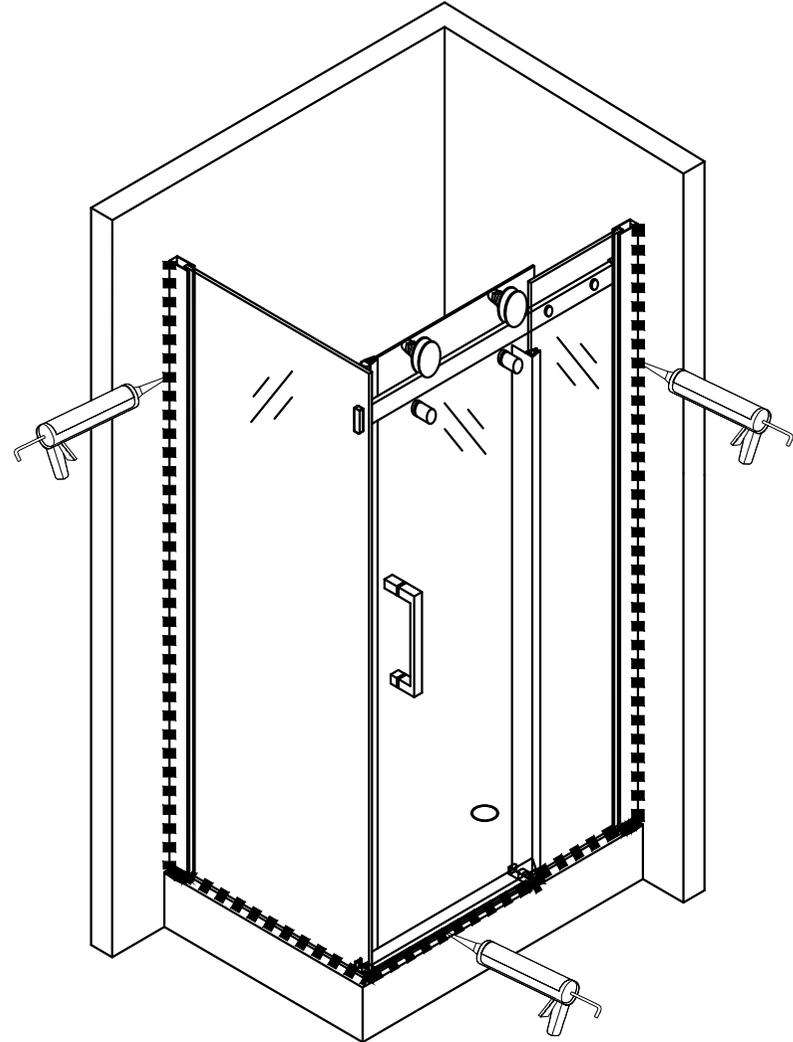

Safety Information for User & Installer

Important information for fitter:

- It is recommended that only approved/qualified plumbers should install the product.
- Incorrect installation of the enclosure will invalidate guarantee.

Safety information prior to and during installation

Carefully check the product for transport damage prior to installation.

Never install damaged panels as there is a risk of spontaneous glass breakage. The supplied fixings/wall plugs are only for mounting directly on solid walls.

It is essential that the solid, masonry/walls be inspected for adequate load-bearing capacity prior to every installation. The supplied fixings/wall plugs are not for use with stud walls such as plaster board, wood, metal or fiber board.

Always seek professional advice to confirm wall type and appropriate type of fixing to be used for installation. Always check walls for concealed utility lines (power, gas, and water) prior to drilling the fixing holes.

Special information on handling glass

- Always protect all glass edges from damage.
- Never stand the glass on its corners throughout the installation! Place the packing material beneath the glass panel; never place the glass on tiles, concrete floors or similarly hard surfaces
- It is mandatory to check each glass panel for damage prior to installation. Never install damaged glass panels as this could cause spontaneous glass breakage!
- If the glass panel is damaged during use it must be replaced without delay. (Failure could cause a risk of spontaneous glass breakage!)

Prevent damage to glass or operation of the product.

- Ensure fittings do not hinder the movement of the door.
- Ensure that no objects are within the range of the door opening/ closing area.
- Avoid hitting the panels with hard objects such as mops when cleaning or tools during assembly. Damaged panels must be replaced as failures may cause latent glass breakage.
- Do not hit against the glass edge with hard or pointed objects (e.g. with mop handle) Damaged panels must be replaced; damage may cause spontaneous glass breakage.
- Do not use panels or handles to hang or support items such as drying towels or clothes.

Maintenance Information

Service/repair and inspection for safety.

- After cleaning, check all the moving elements are sufficiently greased, re-grease, if necessary only use acid-free grease.

Cleaning

Do not use steam cleaners, caustic or aggressive cleaning and scouring agents, cleaners that corrode plastics, or solvents containing acetone or turpentine or neat bleach.

- Do not use any cleaning agents, which according to the manufacturer's specifications may corrode aluminium or light alloys.
- Do not use glass cleaning pastes and micro-fibre cloths to prevent damage to glass coating system.
- In order to prevent the build-up of lime scale, remove any remaining drops of water after showering using a squeegee, soft cloth without any cleaning agent.
- After use, carefully rinse off all residue such as; liquid soaps, shampoos, shower gels or similar cosmetic product with water to avoid deposits.

Important: Never apply the cleaning agent for longer than necessary. After cleaning, check all the moving elements are sufficiently greased, re-grease, if necessary.

Recycling and disposal

Please recycle the packaging in accordance with your local government regulations on waste handling, and follow the same advice at the end of the products life.

For more Information

Visit: victorianplumbing.co.uk