

Tools & equipment needed: Drill, 8mm Suitable drill bit, Phillips screwdriver, Spirit level, Ruler/tape measure, Pencil, Silicone sealant (clear).



IMPORTANT - Advice and safety - Please read before installation

Please read these instructions carefully before starting installation and keep in a safe place for future reference. ENSURE the room is well heated and ventilated.

Check the contents of the pack carefully before installation. Bauhaus will not be held responsible for any de-fit / re-fit costs where faulty product has been fitted.

If any fault is found with materials or workmanship, it must be reported immediately to the manufacturer. Remedial action will be taken, based on information received, on condition that: 1. Full details are supplied to the manufacturer; 2. The product has not been modified or tampered with; 3. The manufacturer is informed of any damage/shortages prior to installation. 4. The product has not been installed, or attempts have been made to install.

We do not accept responsibility for any problems that may occur through incorrect installation.

Advice & Safety

This product should only be installed by a suitably qualified Plumber/ installer. Should the installation be completed by a non-qualified person any product guarantee may be considered invalid. For a claim made under our warranty written certification of your installers qualifications can be required.

It is advised that all doors and drawers are removed prior to fitting to avoid unnecessary damage occurring.

It is recommended that the furniture and accessories are installed after tiling, ensuring that the product is installed flat to the tile face and allows product to be easily removed if required in the future.

These hints have been prepared for your guidance, you must exercise due care at all times.

Please note that some units are heavy. Always take care when lifting, and

follow health and safety guidelines. It is recommended that 2 people carry out the installation of larger basin/vanity units.

Warning! Please check for any hidden pipes or electrical cables before drilling holes in the floor or walls.

When using power tools always follow the manufacturer's user instructions.

Always use the correct wall fixings for non-solid walls – not supplied.

Important pre-installation notes

The carcass on coloured products is supplied with a protective film. This should be removed only after installation is complete. Simply peel off and wipe down with a well wrung chamois leather or micro fibre cloth.

To ensure full working use of the drawers we recommend the use of Bauhaus basin furniture trap BTR0410W.

Care & Cleaning

Ceramic products should be cleaned regularly with warm soapy water, then rinsed with clean water and, if desired, dried and polished with a soft cloth. Limescale deposits can be removed using a 50:50 solution of warm water and limescale remover and soft clean cloth.

We advise against the practice of leaving strong cleaners or bleach in ceramic products overnight this will permanently damage the glazed surface.


Use a well wrung chamois leather or micro fibre cloth to clean furniture carcasses.

If any maintenance is required then it must be carried out by a qualified Plumber.

The manufacturer reserves the right to make technical modifications without prior notice.

The Essence range of bathroom furniture has been designed to be installed in either a run of several units or as individual units.


Note: When installing, the basin unit and basin should be fitted first.

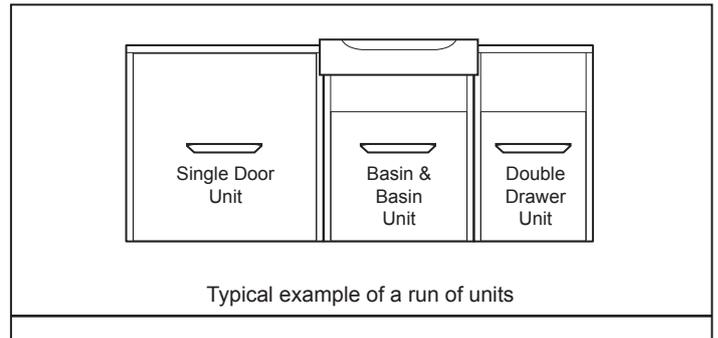

Drawer/Door Unit Installation - 500 Double Drawer Unit is shown as a typical example

Step 1


Remove the drawers before installation. Push the top drawer to open. Pull the bottom drawer front to open. Pull out fully, lift the front, pull out again, lower and fully remove.

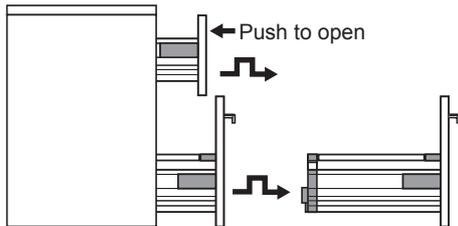

Step 2

Door Unit only


Remove the door before installation. **a:** Lift the tab (shown) on all hinges, to release. **b:** Pull door back.

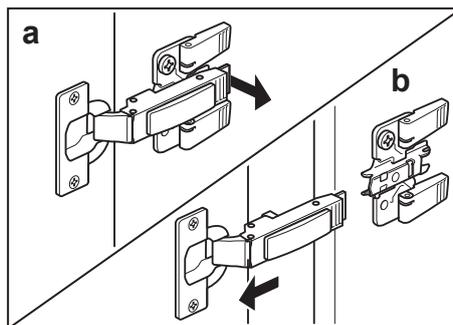

Step 3

Plan unit position


We suggest positioning the storage units so they are level with any other units that have been installed.

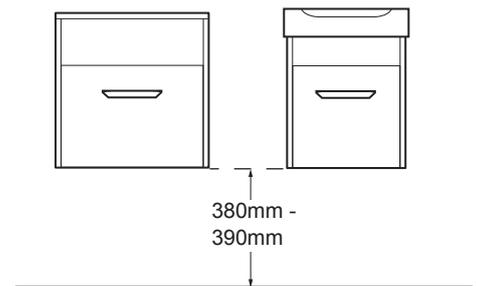


Step 4

Note: The Units can be hung using one of two options, 'Hanging hooks' or 'Wall brackets' depending on your requirements and wall structure. It is recommended to use the bracket option on non-solid walls.

300 Double Drawer Unit/Single Door Unit



500 Double Drawer Unit/Single Door Unit

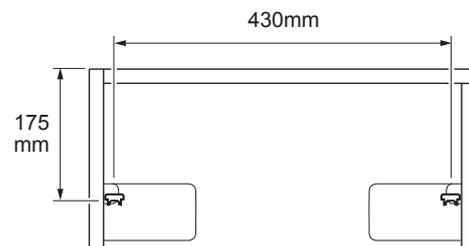

Option 1: 'Hanging hooks'


Use the measurements above, to position the 'hanging hooks'.

a: Mark the fixing hole positions onto the wall.

Drill Ø 8mm holes, insert the wall plugs and the 'hanging hooks'.

b: The 'hanging hooks' should protrude from the wall by 5-7mm.

Position the unit on the hanging hooks.

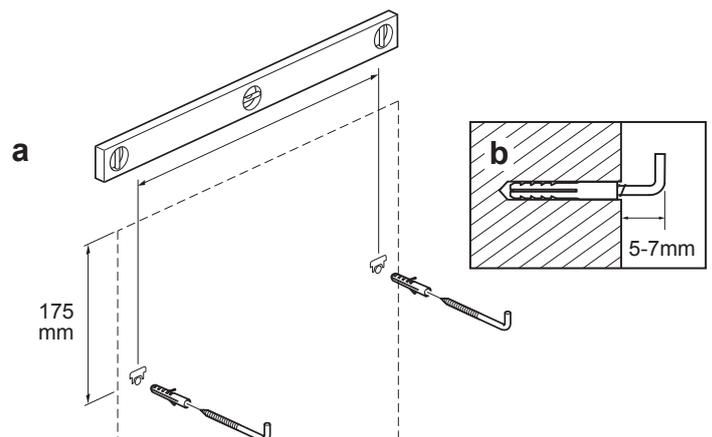

Option 2: 'Wall brackets'


Use the measurement above, to position the 'wall brackets'.

a: Important: The measurement given above is the maximum the brackets can be spaced apart, the brackets must fit within that measurement.

b: Mark the bracket fixing holes onto the wall. Drill Ø 8mm holes, insert the wall plugs and attach the brackets.

c: Important: The brackets must be the correct way up, as shown.

Position the unit on the brackets.

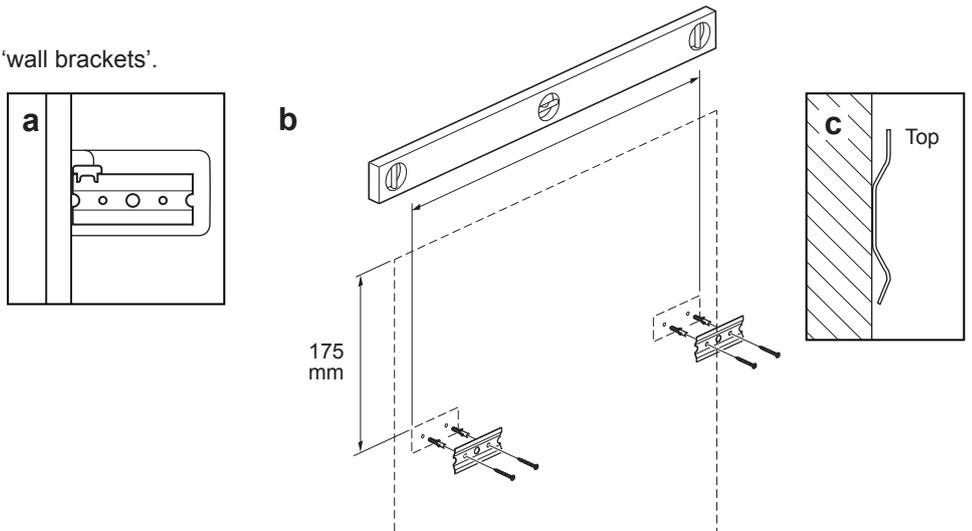


Step 5

a: Check the unit is level.

If leveling is required: inside the unit, use a screwdriver to adjust the hanging position.

b: To lift or lower the unit adjust the screw shown.

c: To move the unit closer or further from the wall adjust the screw shown.

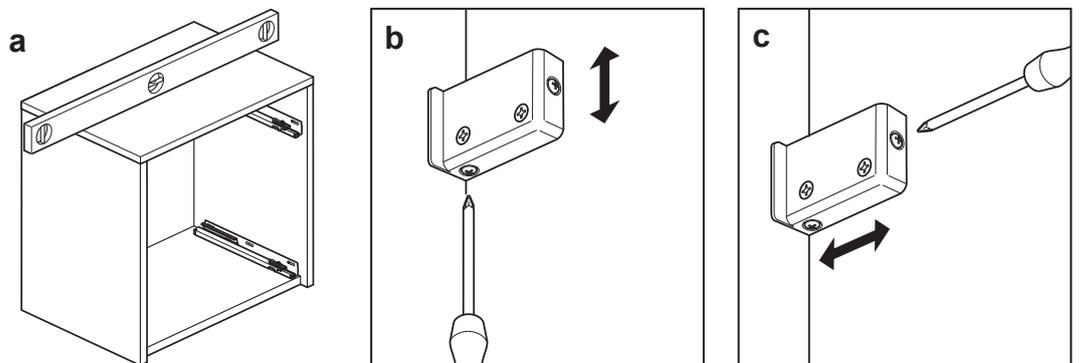


Step 6

Single Door Units

Note: only attach the handle now if **not** changing the opening side (see next page).


Attach handle: Attach the handle to the door front.

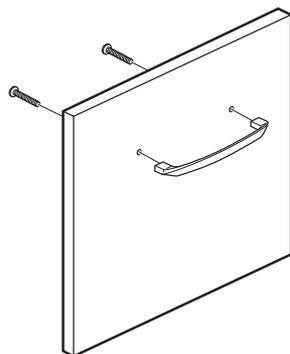

Double Drawer Units

Attach handle: Attach the handle to the door front.

Step 7

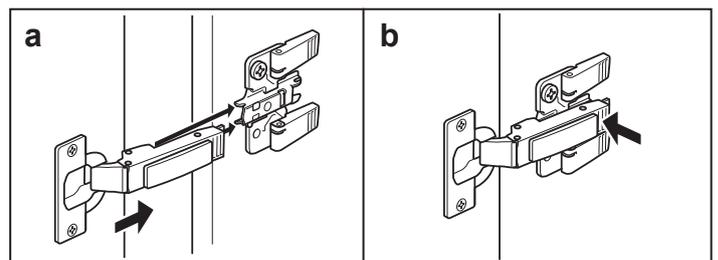

Note: Only re-fit door now if **not** changing the opening side (see next page).

Re-fit door: **a:** Reposition both hinges onto the hinge plates. **b:** Push the front until the hinge 'clicks' into position.

Step 8


Re-fit drawers:

a: Pull out both lower drawer runners.

1: Place the lower drawer onto the runners.


2: Push in until the drawer 'clicks' into position.

b: Repeat with top drawer.

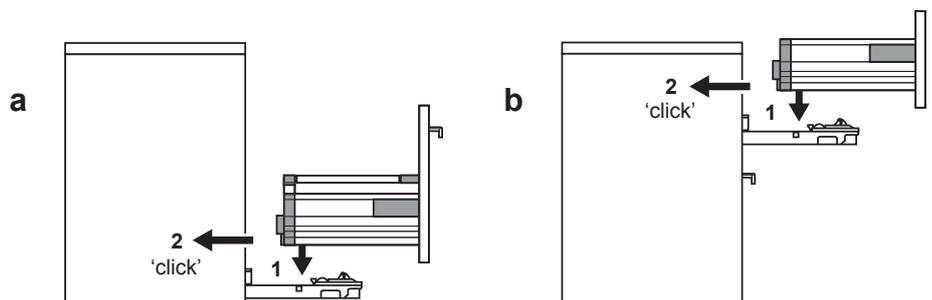

If changing the door opening side or the door alignment needs adjusting, follow the instructions below.


Changing door opening side

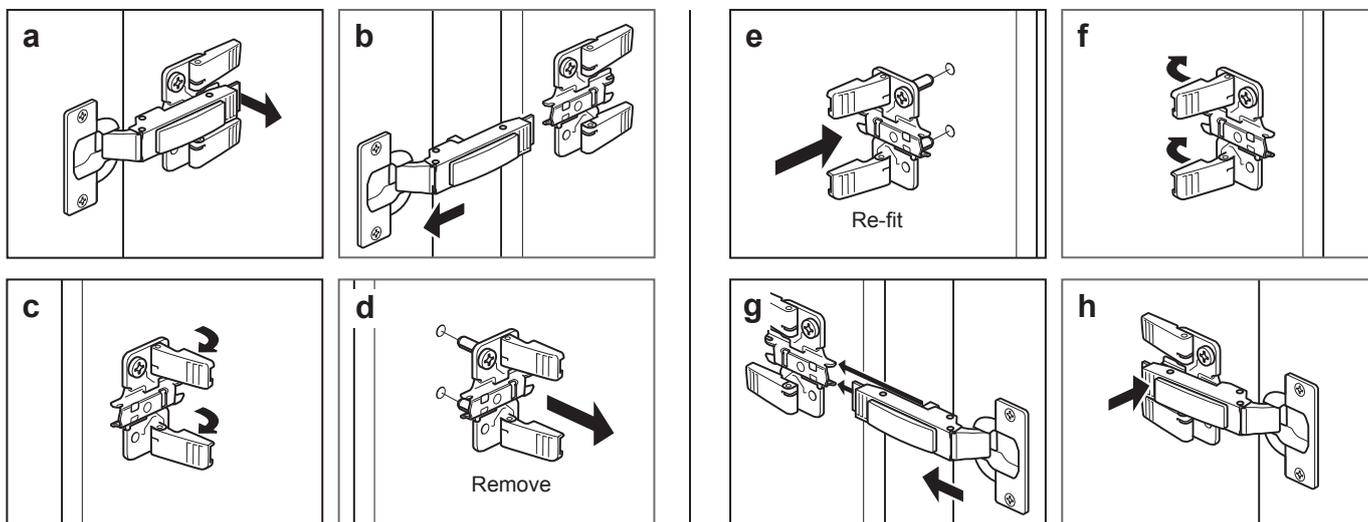

a: Lift tab (shown) on both hinges, to release the hinges.
b: Pull door back. **c:** Lift the hinge plate tabs. **d:** Remove the hinge plates.

e: Re-fit both hinge plates on the opposite side. **f:** Fold hinge plate tabs back. **g:** Rotate door. Reposition both hinges onto the back plates. **h:** Push the front until the hinge 'clicks' into position. Attach the handle to the top set of holes on the door.

Hinge adjustment

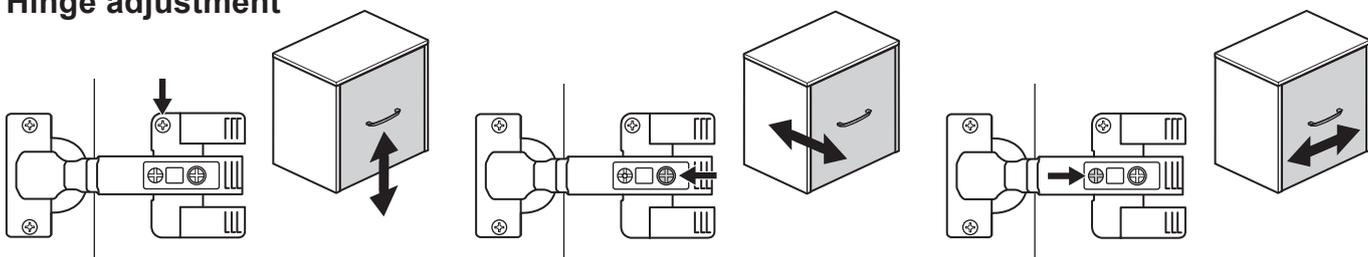

To move door up or down: Turn screw shown to move door up or down to suit.

To move door in or out: Turn screw shown to move door in or out to suit.

To move door left or right: Turn screw shown to move door left or right to suit.

bauhaus

For any further information please contact
 Bauhaus on: **0845 873 8840**

Or visit our web-site at:
www.bauhaus-bathrooms.co.uk

The manufacturer reserves the right to make technical
 modifications without prior notice.