


Thank you for purchasing this Victorian Plumbing product. Please follow these care instructions to ensure your product retains its high quality finish


- and retain this leaflet for future reference.

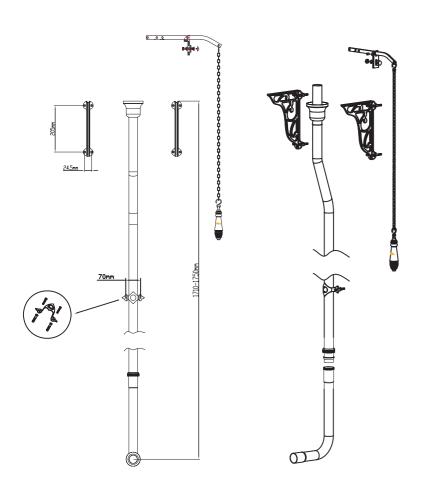

- 1. Identify all components are present prior to installation
- 2. Measure the reserved size
- 3. Install the pannel holder (5) in the book-position and make in the position of screw hole
- 4. Drill the hole by using electric drilling machine and put the plastic screw pipe(6) into the hole
- 5. Put the pannel holder (5) on the hole and plastic screw (7) installed by srew tightly
- 6. Install the drain pipe(1) into the type of "L" pipe and screw tightly
- 7. Put the drain pipe(1) into the hole of tank, locking nut then place whith rose
- 8. Put the pipe strap(3) in the book-position and make a sign in the position of the screw hole
- 9. Drill the hole by using electric drilling machine and put the plastic screw pipe(6) into the hole
- 10. Put the pipe strap (3) on the hole and plastic screw (7) installed by srew tightly
- 11. Put the base and square rod(9) into the side hold of tank and screw tightly
- 12. Hang up the ceramic handle
- 13. Please check whether the water leakage after installation is finisher

Victorian Plumbing

Diamond House. 41, Stephenson Way. Formby Business Park Formby. England. L37 8EG Tel: 0044 800 862 0878 Website:www.victorianplumbing.co.uk

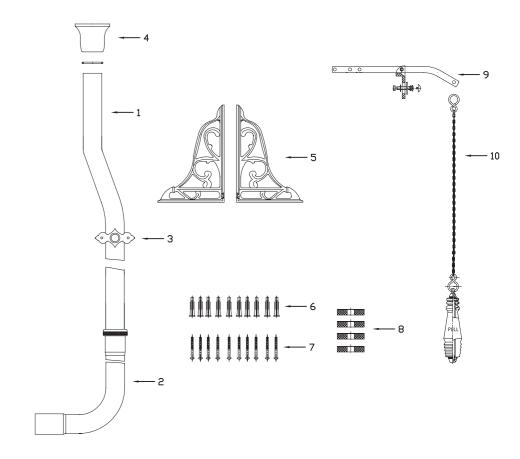

- 1.Drain-pipe
- 2."L"pipe
- 3.Pipe strap
- 4.Rose
- 5.Pannel holder

- 6.Screw
- 7. Plastic screw pipe
- 8. Rubber washer
- 9.Base holder
- 10.Chain, ceramic handle