


Thank you for purchasing this Victorian Plumbing product. Please follow these care instructions to ensure your product retains its high quality finish

- and retain this leaflet for future reference.
- 1.check all components are complete before installation
- 2.take the adjustable lever(7) out, and get the bolt(6)out then take the washer(2)and locking nut(3)out
- 3.make the handle(7)across the hole of tank and then fit the washer(2)and locking nut(3), screw the locking nut (3)tightly
- 4.install the washer(5)and bolt
- 5.put into the adjustable lever(7), and connect the hook with adjustable lever in a suitable hole
- 6.make the screw of the adjustable lever(8)tightly

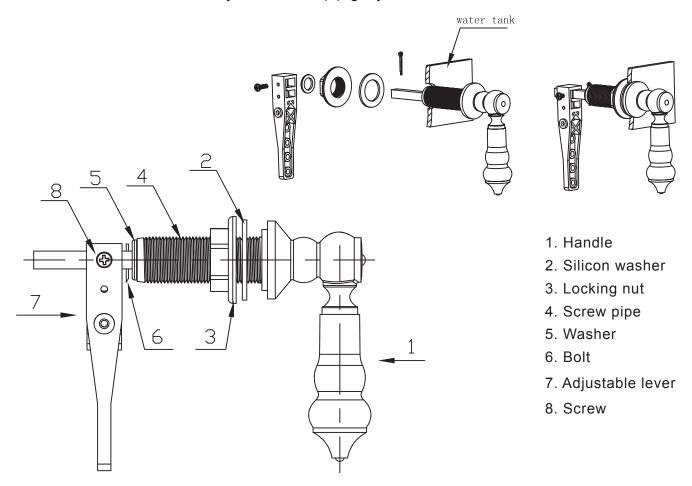

Victorian Plumbing

Diamond House. 41, Stephenson Way. Formby Business Park Formby. England. L37 8EG