

## Bath Shower Mixer Fitting Instructions

Thank you for purchasing this Croydex product. Please follow the fitting and care instructions to ensure that your bath shower mixer set is fitted safely and that it retains its high quality finish.

### Bath Shower Mixer Set Contents

Semi permanent diverter system

Multi-position shower head with easy clean rose

Flexitube shower hose

Fully adjustable riser bar

### Tools Required

Drill; Pencil; 6mm masonry drill bit; 6mm ceramic drill bit (optional); Spirit level; Small flat head screwdriver; Flat head screwdriver; Tape measure.

### KEEP DIY TOOLS OUT OF THE REACH OF CHILDREN

#### General Safety Advice

- For safety and convenience do not use with water above 65°C or with excessively high water pressure (max 50psi/3.5 bar).
- To avoid the risk of scalding always check the water temperature before entering the shower.
- Always take care when using hot water, especially with children and NEVER leave a child unattended in the bathroom.
- Take extreme care when using power tools particularly in the bathroom. Always check for hidden cables and pipework before drilling and take extreme care if there is any water in the in the working area. It is advisable to use a residual current circuit breaker (RCCB) Always use eye protection when using power tools.
- If the product is to be fitted on a ceramic tiled wall, a ceramic drill bit should be used. Always ensure that the drill hole passes through the central tiled area rather than through the grouted area. To prevent surface damage to the tile, mask the area around the hole with tape before drilling


The Croydex Bath Shower Mixer Set has been designed with safety in mind and incorporates a unique safety shut off valve, which automatically diverts water from the shower head to the bath as soon as the water pressure falls below a predetermined level.

To use the shower, firstly turn on the taps, adjust the water temperature and pull the lever forward to divert water to the shower head. **DO NOT USE EXCESSIVE FORCE WHEN OPERATING THE LEVER.**


The pressure of water will hold the lever forward in the shower mode until the taps are turned off. The lever will then automatically revert back to the bath mode position.

### Diverter Fitting Instructions


(Note: for the best results the spray head should be fitted 1m (3') or more below the bottom of the cold water tank.)

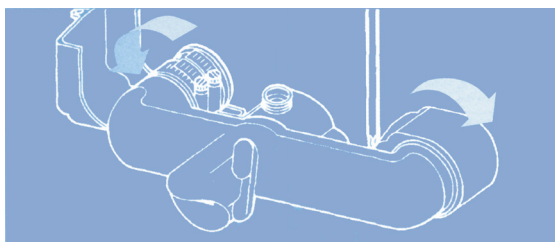


1. Unscrew the white covers to reveal the rubber tap seals and clips.

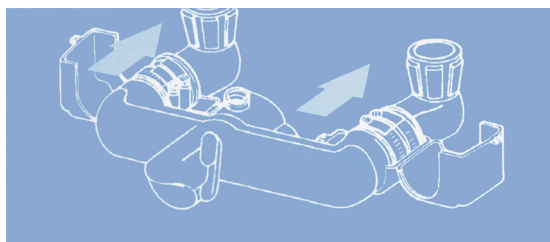


2. Push the rubber tap seals over the tap spouts. (A little soap around the spouts might make this easier).

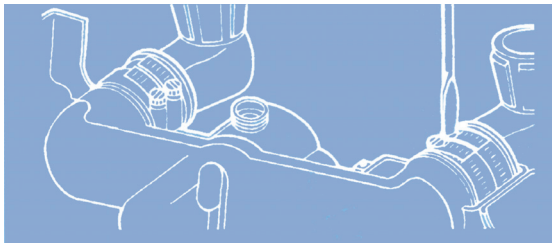


3. Ensure that the screw is pointing upwards and is on the inside face as shown. Tighten the clips with a screwdriver for maximum grip.

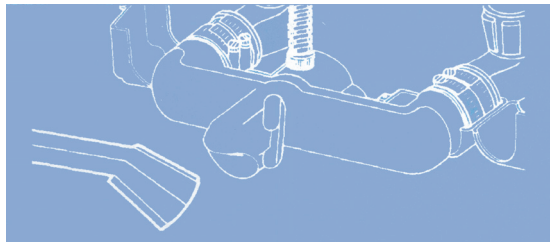

4. Connect the shower hose and handset. (Include all washers supplied).

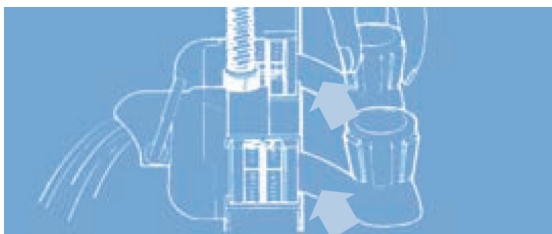


5. Turn on the taps and check for any leaks around the rubber seals. Tighten the clips further if necessary.

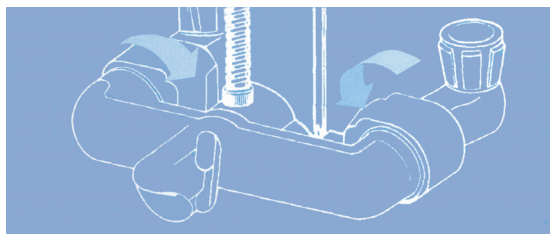


6. Replace the white tap covers and tighten the screws.


### Riser Bar Fitting Instructions

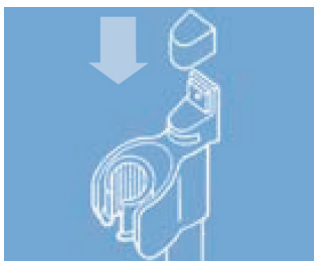


1. Remove the riser bar bracket caps.

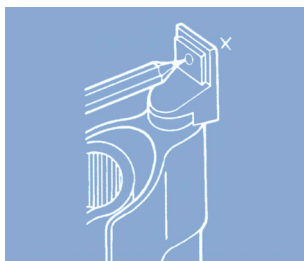

2. Mark the positions for the screw holes ensuring they are vertical.

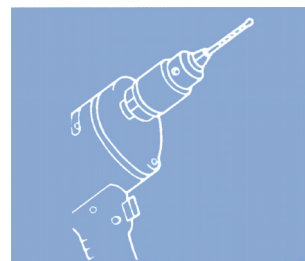


3. Drill holes using a 6.0mm masonry drill bit. (See note re: ceramic tiles in Safety Advice.)

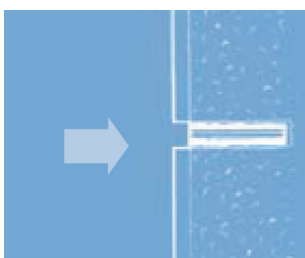

4. Insert the wall plugs below the plaster or tile level.  
(If fitting to a tiled surface, the wall plugs should be inserted below the surface of the tile.)



5. Screw the bracket to the wall.

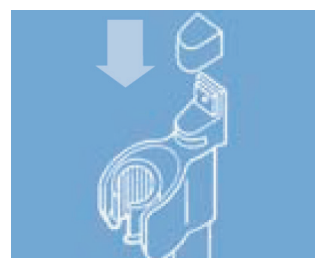

6. Replace the bracket caps.

### Care Advice

To retain the best quality finish, clean the product regularly with a soft damp cloth. Do not use abrasive or chemical cleaners, as these will damage the product.

**Please retain this leaflet for future reference.**

Croydex, Central Way, Andover, Hants, SP10 5AW, UK  
Tel: +44 (0) 1264 365881. Fax: +44 (0) 1264 356437  
Website: [www.croydex.com](http://www.croydex.com). E-mail: [info@croydex.co.uk](mailto:info@croydex.co.uk).