

Hampstead Wall Mounted Accessory Fitting Instructions


Thank you for purchasing this Croydex product. Please follow the fixing and care instructions to ensure your accessory is fitted safely and retains its high-quality finish. **Please retain this leaflet for future reference.**

Fixing Pack Contents

Long Fixing Screws x 2 (4) (Double Mounting)

Wall Plug x 2 (4) (Double Mounting)

Wall Fixing Bracket x 1 (2) (Double Mounting)

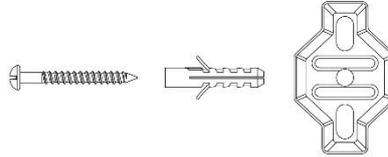

Contents supplied will vary depending on the product. The quantities shown above in brackets are for double bracket fixings.

NOTE - The wall plugs supplied are for solid walls only, use appropriate fixings for cavity walls.

Tools Required

Drill

6mm masonry drill bit

6mm ceramic drill bit (optional)

Cross head screwdriver

Pencil

Spirit Level

Small flat head screwdriver

Tape measure


KEEP DIY TOOLS OUT OF THE REACH OF CHILDREN

Safety and Care Advice:

1. Always take care when using an electric drill, particularly in the bathroom. Always check for hidden cables and pipework before drilling. Always use a residual current circuit breaker (RCCB) when using mains powered tools and take extreme care if there is any water in the working area.
2. Always wear suitable eye protection when drilling.
3. If the product is to be fitted on a ceramic tiled wall, a ceramic drill bit should be used. Do not drill mounting holes in the grouted area between tiles. Mask the area around the hole with tape before drilling to prevent damage to the tile.
4. Do not use the product as a grab bar.
5. Do not strike glass surfaces with sharp or hard objects.


Fitting instructions for items with single and double mounting points

1. Select where the product is to be located and mark its centre on the wall. (**Refer to Fig. 1 for centre positions of double mounting items.**) Centre the wall fixing bracket over the mark and using it as a template mark the screw fixing positions on the wall surface.
2. Drill the holes to a depth of 40mm in the marked positions using a 6mm masonry drill. If the product is to be fitted onto a ceramic tiled wall, a ceramic drill bit should be used.
3. Insert the wall plugs flush to the surface of the wall. If fitting to a tiled surface the wall plugs should be inserted below the surface of the tile to avoid cracking.
4. Insert the screws provided through the wall fixing bracket and screw into the wall. Ensure the wall bracket is level.
5. Using a small flat head screwdriver loosen the grub screw within the backplate. Place the backplate on the wall bracket and tighten the grub screw as shown in Fig.2

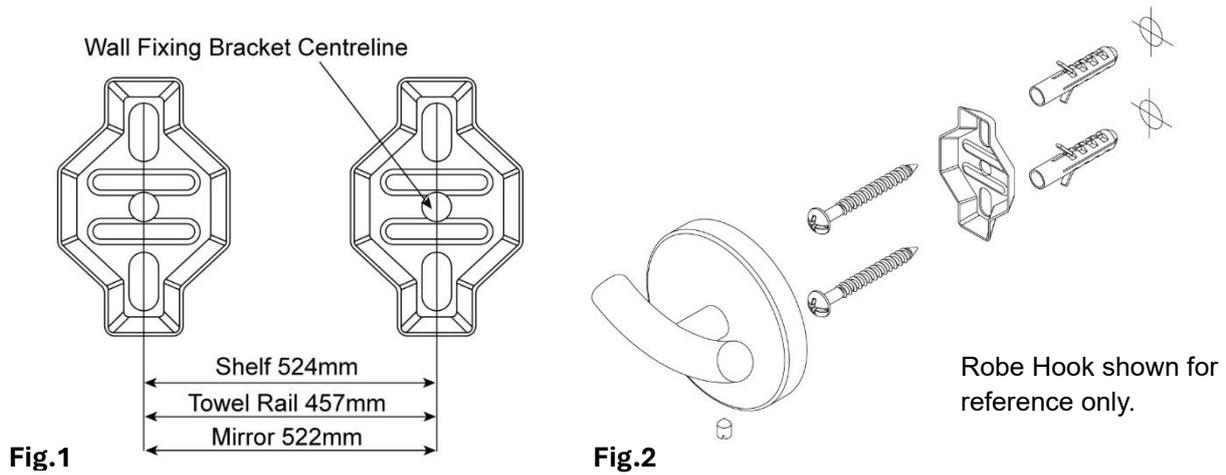

Instructions for Mirror Fixing

1. Select the position for the mirror and fix the wall fixing brackets in place referring to both the dimensions shown in Fig 1 and the instructions for double mounted fixing.
2. It is important to ensure the wall fixing brackets are fitted horizontally on a flat surface. Failure to do this may result in glass breakage.
3. Slide both decorative backplates onto the rotation brackets which are pre-assembled to the mirror as shown in Fig.3. Note all rubber O-rings on the rotation brackets must be completely concealed.
4. Using a small flat head screwdriver loosen the grub screws on the underside of the decorative backplates prior to fitting the assembled mirror. (See Fig.4)

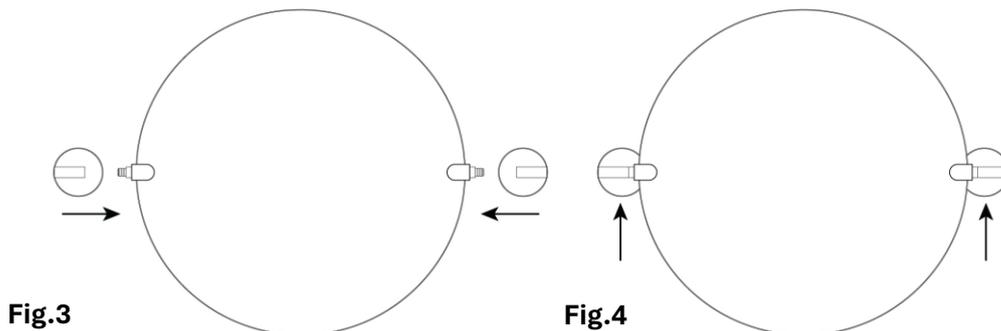

Additional Information

Maximum safe working load for the shelf is 5kg. This load must be evenly distributed across the surface area of the shelf.

Product Care Advice

- To retain the best quality finish, clean product regularly with a soft damp cloth.
- Do not use abrasive or chemical cleaners, as these will damage the product.
- Do not place hot objects onto the surface of the glass.
- Do not position glass components in close contact with a heat source.

(UK): Croydex, Central Way, Andover, Hants, SP10 5AW, UK
 (EU): MIL, Unit 8 Purcellsinch Ind Est, Dublin Road, Kilkenny, 95 HP71, Ireland
 Tel: +44 (0) 1264 365881. Fax: +44 (0) 1264 356437
 Website: www.croydex.com. E-mail: info@croydex.co.uk.