

SNL+ Telescopic Tension Rods

AD100100 - AD101100 - AD102100

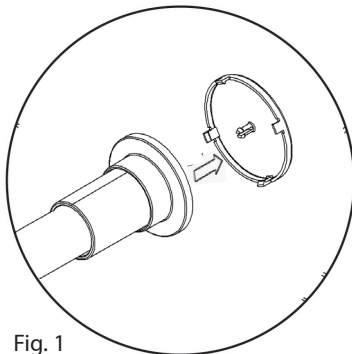


Fig. 1

Firstly remove the protective cap which is covering the double sided tape on the collar moulding.

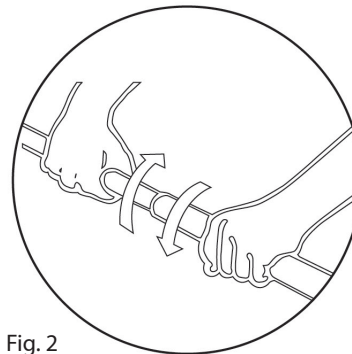


Fig. 2

Grasp the two sections of the rod firmly and unlock the mechanism by twisting your right hand in an anti-clockwise direction.

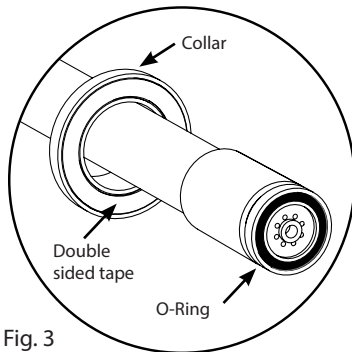


Fig. 3

Ensure the wall brackets and collars are placed at each end of the rod as indicated and the black O-rings are located into the grooves at the end faces of the wall brackets.

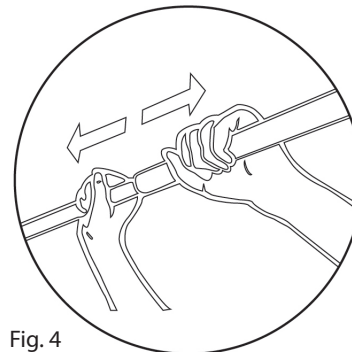


Fig. 4

Extend the rod to the desired length and place in position between the walls.

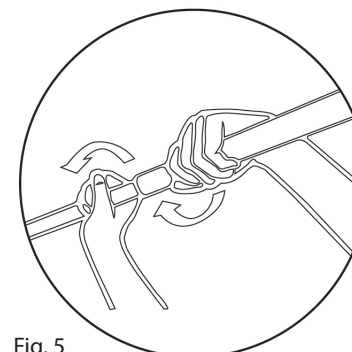


Fig. 5

When you are happy with it's position, further extend the rod to ensure a tight fit and twist your right hand clockwise to lock the tubes together. Check the rod is level and in the correct position and adjust as required.

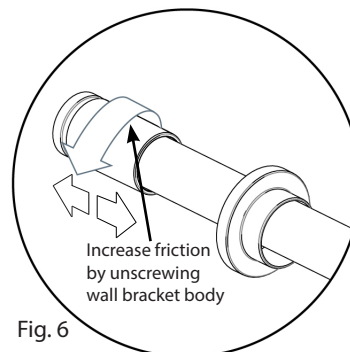


Fig. 6

To increase friction between the wall surfaces, unscrew the rotatable wall bracket body, at the end of the larger diameter tube, to ensure a tight fit.

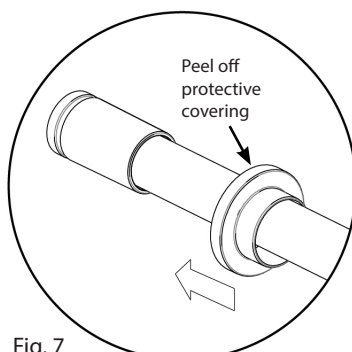


Fig. 7

Peel off the protective covering from the double sided tape on the double side of the collar moulding and slide along the tube.

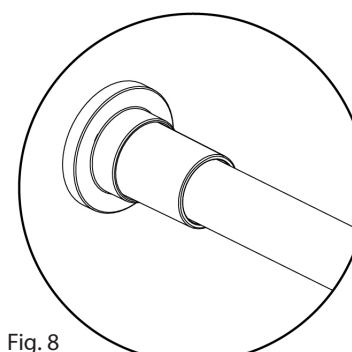


Fig. 8

Press the collar moulding against the wall surface to ensure a secure fixing. The rod can be removed by unlocking the mechanism as shown in Fig.1. Follow the sequence for replacement, aligning and inserting the wall brackets into the collar mouldings.

Product Care

To retain the best quality finish, clean product regularly with a soft damp cloth. Do not use abrasive or chemical cleaners as these will damage the product.

Croydex Ltd, Central Way, Andover, Hants, SP10 5AW, UK

Tel: +44 (0) 1264 365881

Fax: +44 (0) 1264 356437

Email: info@croydex.co.uk

For details of the other items in the Croydex range please visit our website:
www.croydex.com

Warnings

Please read these instructions carefully.

The adhesive pad is suitable for use on most flat, finished surfaces, such as gloss paint, tiles, polished stone, laminates and mildly textured surfaces.

Do not use on decorative wall paper finishes as these will be damaged on removal.

Thoroughly clean the mounting surface to remove any dirt, residue or contaminants that may reduce the adhesive performance.

Important Note - The adhesive pad can only be used once. It cannot be re-applied.