

Installation instructions



Thank you for purchasing this Victorian Plumbing product. Please follow these care instructions to ensure your product retains its high quality finish - and retain this leaflet for future reference.

- 1.check all components are complete before installation
- 2.take the adjustable lever(7) down, and take the bolt(6) out then take the washer (2) and locking nut (3)away
- 3.make the handle (1)across the hole of tank and fit into the washer(2) and locking nut(3), then screw the locking nut(3) tightly.
- 4.fit on the washer(5) and put into the bolt(6)
- 5.choose a suitable hole and connect the adjustable lever(7) with hook
- 6.make the screw of adjustable lever tightly

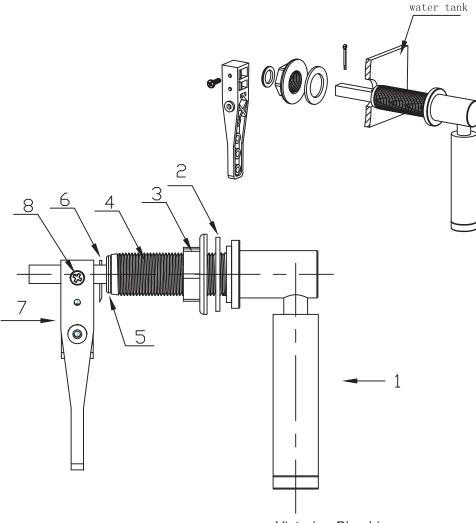



- 1. Handle
- 2. Silicon washer
- 3. Locking nut
- 4. Screw pipe
- 5. Washer
- 6. Bolt
- 7. Adjustable lever
- 8. Screw

Victorian Plumbing

Diamond House. 41, Stephenson Way. Formby Business Park Formby. England. L37 8EG

Tel: 0044 800 862 0878

Website:www.victorianplumbing.co.uk