




## **Gatsby Freestanding Bath Shower Mixer Tap**

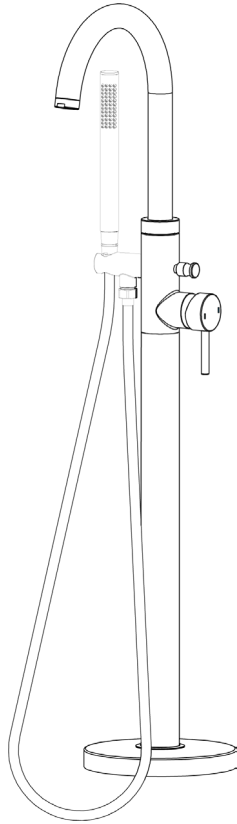

## **Fitting Instructions**

Please follow them carefully and  
leave this manual with end user

## Before you begin:

1. We recommend that this product is installed by a qualified tradesperson and we accept no liability for products fitted incorrectly, and where the correct testing procedures have not been used, resulting in the escape of water.
2. Observe all local plumbing and building codes.
3. Unpack the product then read these instructions before proceeding. Inspect the product for damage. If any damage is found, contact our Customer Relations team.
4. Make sure that the two G1/2 male connectors are pre-installed under the floor.

## Installation:

1. Prepare a circular hole in the floor 100mm (4") minimum, 150mm (6") maximum, 75mm (3") deep.
2. Decorate the floor. (Pay attention to the size of the holes.)
3. Unscrew and take off lock nut (3), push decorative cover (1) onto the lower position of tube (2), then screw the lock nut (3) on to the thread as far as it will go.
4. Screw the mounting flange (4) onto the tube.
5. Tighten screw the lock nut (3) on to the mounting flange (4).
6. Connect cold / hot inlet pipe (7) to two G1/2 male connectors, which is water supply pipe.
7. Use screws (5) and expansion screws (6) to fix Flange (4) to the floor. Push the decorative cover (1) onto the floor.
8. Screw Outlet pipe (8) to Tube (2), tighten Round Screw nut (9) by hand (**Note:** make sure the two plastic washers (10) are in place).
9. Fit the hose (15) to the outlet pipe, and the handset (12) to the hose, ensuring sealing washers (13) are in place.
10. Open the hot and cold water supply, check all the joints and connections for any leakage before use.

## Guarantee & Aftercare:

When installing or using tools, extra care must be taken to avoid damaging the finish or fitting. To maintain the appearance, please ensure it is cleaned regularly using a clean soft damp cloth only. Abrasive cleaners or detergents must not be used as they may cause surface deterioration. The company provides a guarantee against faulty material or manufacture excluding serviceable parts, providing they have been installed, cared for and used in accordance with our instructions.

