

HiB

MAKING
BATHROOMS
BEAUTIFUL




(Fig. 1)

This product is suitable for installation in zones: 2 & Outside Zone

All installations must comply with guidelines which are based on a zonal concept. The diagram above illustrates this concept and must be followed to ensure the safe installation of electrical appliances in the bathroom. These regulations apply to domestic installations only. Installations must be made in accordance with the current IEE wiring regulations and relevant building regulations. **HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician.**

Please Note these products must be installed with a minimum distance of 150mm between the infra-red sensor switch and any surface or object to ensure correct operation of the sensor.



Min. 150mm

Installation

1. Position the mirror in a suitable location (according to the zonal diagram below-left), ensuring that the domestic electrical mains supply is within reach of the electrical entry point of the product.
2. Carefully mark the position of the mirror using a soft pencil.
3. Remove the mirror and mark the mounting points according to the diagram on the left. **Please ensure that all marked mounting points accurately match up with the fixing points on the mirror.**
4. **Before drilling, ensure there are no hidden cables or pipes behind the mounting points.** Using a masonry drill, drill holes in the marked positions to a suitable depth. If drilling through tile, use a ceramic drill bit.
5. Insert wall plugs level with the surface of the wall. If fitting to a tiled surface, wall plugs should be inserted below the tile surface to avoid cracking. *NB. For plasterboard walls, specialist fixings should be purchased, available from any DIY or hardware store.*
6. Screw hook screws into wall plugs.
7. Ensure the domestic electrical mains supply to which the mirror is being connected is turned off. Connect the domestic mains supply to the terminal box according to the wiring diagram (Fig. B).
8. Hang the mirror in position.

Illuminated Mirrors

Maxi Art No. 73106100

Zenith Art No. 73105500


Thank you for purchasing this HiB product.

Please read through these instructions carefully and refer back to them during installation to ensure that your product is fitted safely and that it retains its high quality finish.

Please retain this leaflet for future reference.


Before installation, ensure the domestic electrical mains supply to which the mirror is to be connected is turned off. Before drilling, ensure that there are no hidden cables or pipes in the wall.

Mounting Points Diagram (Fig. A)

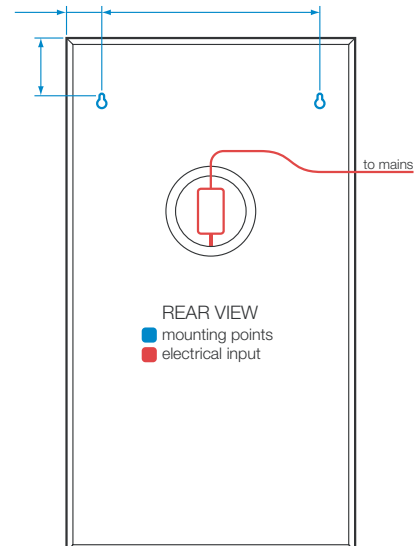

REAR VIEW


■ mounting points
■ electrical input

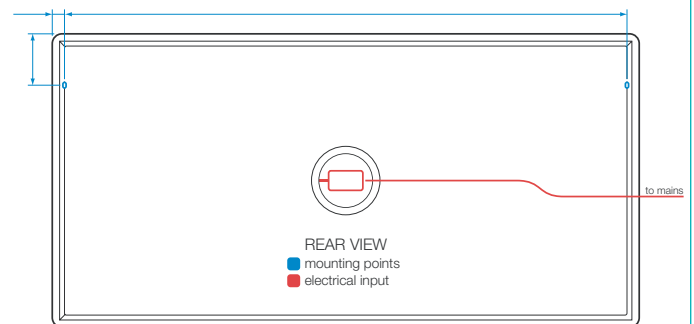

REAR VIEW

■ mounting points
■ electrical input

Wiring Diagram (Fig. B)

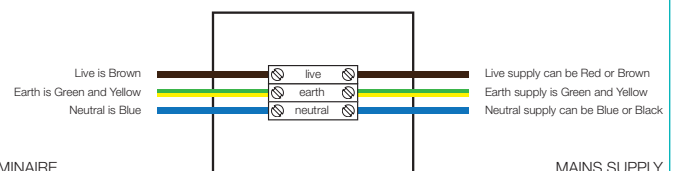

LUMINAIRE

MAINS SUPPLY

T: +44 (0)20 8441 0352 F: +44 (0)20 8441 0219 E: sales@hib.co.uk hib.co.uk

Building 3, North London Business Park, Oakleigh Road South, New Southgate, London. N11 1GN Fl#01 007 R151124 Ver No. 1.0 Jan 2016

©HiB Copyright: No part of this document may be reprinted or duplicated without HiB consent. All sizes and measurements are approximate, but we do try and make sure they are as accurate as possible. In the interest of continuous product development, HiB reserves the right to alter specifications as necessary. E & OE.

Operating Instructions

To turn illumination on or off, operate the sensor switch located at the bottom of the mirror.

Heated Pad is only on when mirror is illuminated.

Zenith only; charging socket is suitable for recharging toothbrushes. *NB. On first use of the shaver socket, inserting the shaver plug may prove to be stiff. Reasonable force may be required to fully insert the plug. Make sure that the mirror is held firmly so that it is not pushed off the wall. After a few uses, stiffness will ease and the socket will function as normal.*



WEEE compliance

Must not be mixed with general household waste

Bulb Replacement

Maxi requires 2 x T5 bulbs, Maximum 21 Watts

Zenith requires 2 x T5 bulbs, Maximum 14 Watts

CAUTION: The surface of the bulb may become extremely hot!

Allow at least 30 minutes after bulb failure before replacing...

1. Turn off the mains electrical supply and disconnect the wiring between the mains electrics and the mirror.
2. Remove the back plate on the reverse of the mirror.
3. Carefully grasp the failed bulb and rotate 90° anti-clockwise and remove the bulb from the bulb holder.
4. Carefully push the replacement bulb into the bulb holder and rotate 90° clockwise to secure.
5. Replace the back plate on the reverse of the mirror.

Care Instructions

Do not use abrasives or solvents when cleaning this product.

Wipe off all water spillages as soon as possible using a soft, damp cloth.

Aftercare Service

In the unlikely event that this product should fail please contact HiB customer services, details shown below.