


Please note: The side valves and 3/4" hoses are not supplied with this product, but illustration shows the installation arrangement when valves and hoses are purchased separately.

Please note we strongly recommend the fitting of check valves in the supply pipework to prevent back siphoning of foul water into the domestic water system

- 1 - Inlet elbow (2)
- 2 - Flat grey washer
- 3 - Chrome 'C' spacer (fit in hole in bath)
- 4 - White 'C' spacer (for thin baths)
- 5 - Thick bath adaptor
- 6 - Water outlet
- 7 - Threaded locking bush
- 8 - Pop-up waste operating handle
- 9 - Double rubber sealing washer
- 10 - Waste grid
- 11 - Spacer (optional)
- 12 - Waste screw
- 13 - Plug height adjusting screw
- 14 - Locknut
- 15 - Plug
- 16 - Locking ring (hand tighter)
- 17 - Nylon washer
- 18 - O ring
- 19 - Conical rubber seal
- 20 - O ring (2) fit inside pipe
- 21 - Foam washer

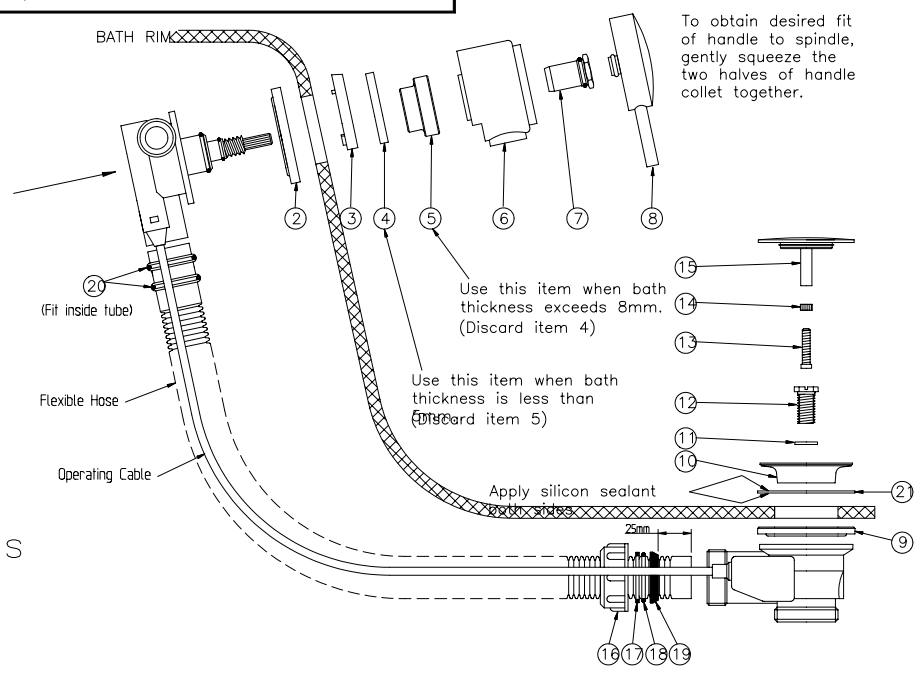

## E358 Fitting instructions