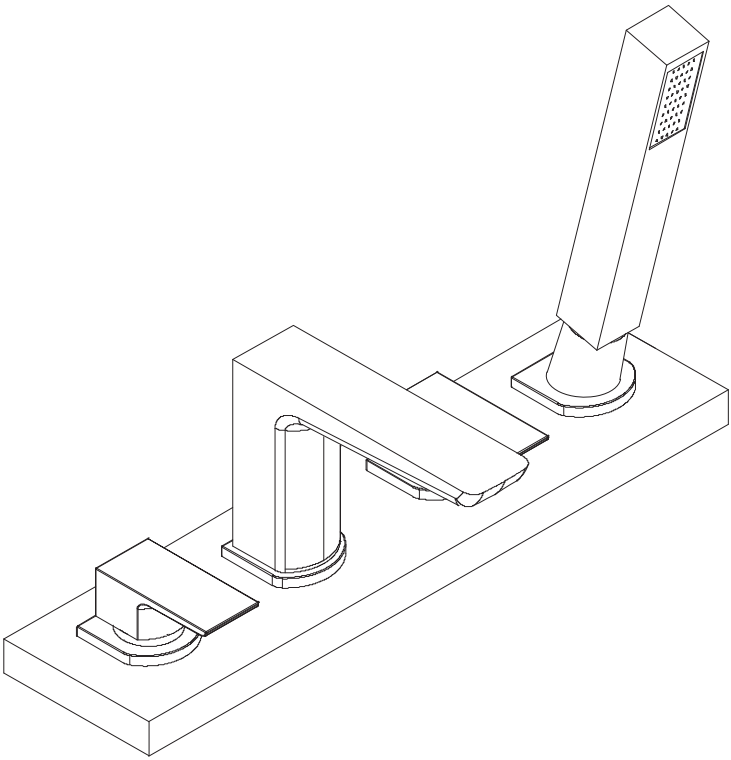
victorian plumbing.co.uk

Deck Mounted 4 Tap hole Bath/ Shower Mixer Tap incl. Shower Kit




Fitting Instructions


Please follow them carefully and leave this manual with end user

Before you begin:

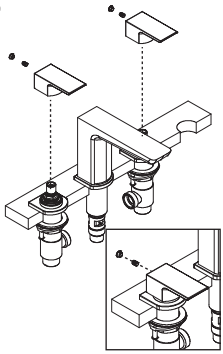
1. **We recommend that this product is installed by a qualified tradesperson**, Victorian Plumbing Ltd. accept no liability for products incorrectly installed, or where the correct testing procedures have not been adhered to, thus resulting in the escape of water and consequential damage.
2. Ensure the supply pipes have been thoroughly flushed to remove any debris.
3. Ensure the incoming mains water supply is switched off prior to commencing the installation.
4. Observe all local plumbing and building codes & regulations.
5. Unpack the product then read these instructions before proceeding. Inspect the product for damage. If any damage is found, contact our Customer Relations team.

① 


Insert the hot & cold side valves, O-rings and back nut to the underside of the pre-drilled holes in the bath. Tighten the back nuts to secure in place.

② 

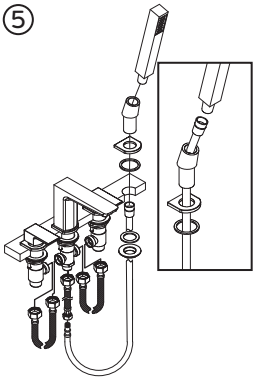
Place the washers, cover plates and base rings over the hot and cold valves. Feed the centre tap, cover plate and washer through the hole in the top.

③ 

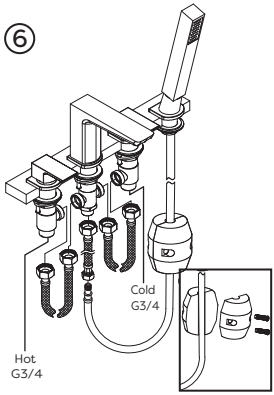
Fit the tap handles to the hot and cold valve knobs. Secure in place using the threaded grub screw and Allen Key provided.

④ 

Slide the O-ring and back nut to the middle tap on the underside of the bath, tighten to secure. Place the diverter valve and nut over the cartridge and tighten.

⑤ 

Flush the pipework then connect the flexi-pipes to the valves. Connect the hose to the diverter pipe and feed through the hole. Tighten the back-nut to secure

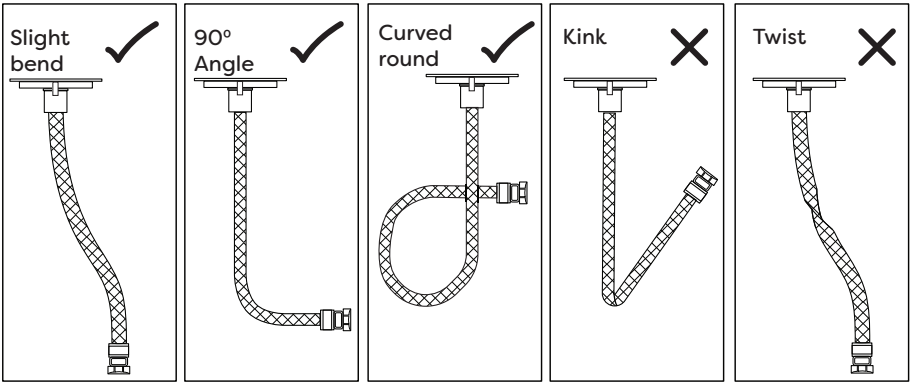
⑥ 

Screw both halves of the weight around the hose. Ensure the weight is pulling the hose back into the mixer. Connect the hot & cold water supply to the valves.

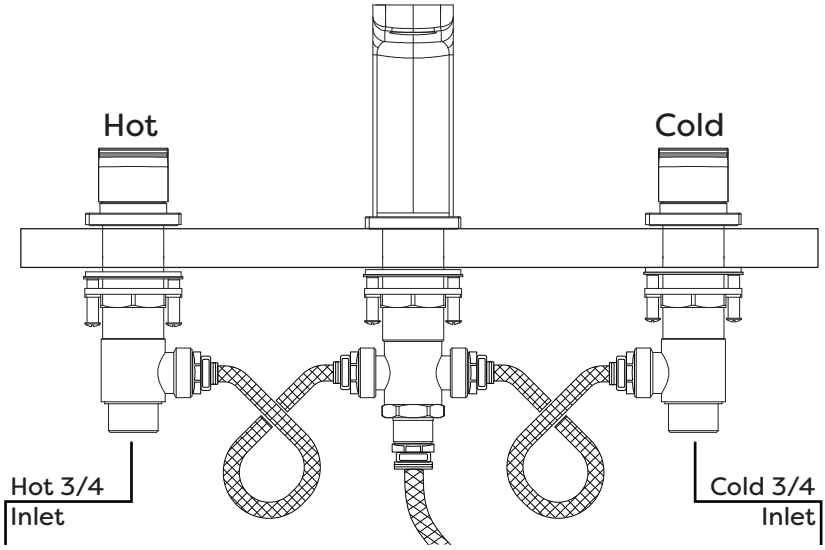
Note: Diagrams are for illustration purposes only. Your tap may superficially differ from this drawing however the installation guide steps still apply.

Flexible Connecting Pipes:

When installing the flexi-pipes to the household pipework. Special care must be taken to ensure they do not bend sharply causing a kink or twist. Failure to do so may result in poor performance and damage to the flexi-pipes.



Example:



Once all pipes are securely connected; turn on the mains water supply, run the taps, and check all joints/connections for any leaks.

Aftercare:

Always clean the surface of tap to keep it bright. **Attention:** please do not use inappropriate tools such as sharp brushes, rough sponges, scouring pads or corrosive detergent to clean the tap. Please clean the tap by wet cloth and soapy water. Then rinse the soap out with clean water and dry with a soft cotton cloth.

Troubleshooting

FAULT	POSSIBLE CAUSE
Taps do not turn on	• Closed isolation valve. • Mains water supply turned off.
Water dripping from taps	• This is normal for a short time after using the taps. • If water continues to drip, possible build up of limescale in the cartridge valve.
Low or no flow rate	• Partially closed isolation valve. • Instantaneous water heater cycles on and off as flow rate pressure is too low. • Head of water is below the minimum distance required. • Hot or cold water being drawn off elsewhere causing pressure changes or instantaneous boiler temperature changes. • Airlock or partial blockage in the supply pipework.

Recycling and Disposal:

Please recycle the packaging in accordance with your local government regulations on waste handling and follow the same advice at the end of the products life.

www.victorianplumbing.co.uk