




Traditional Bath Shower Mixer Tap with Handset

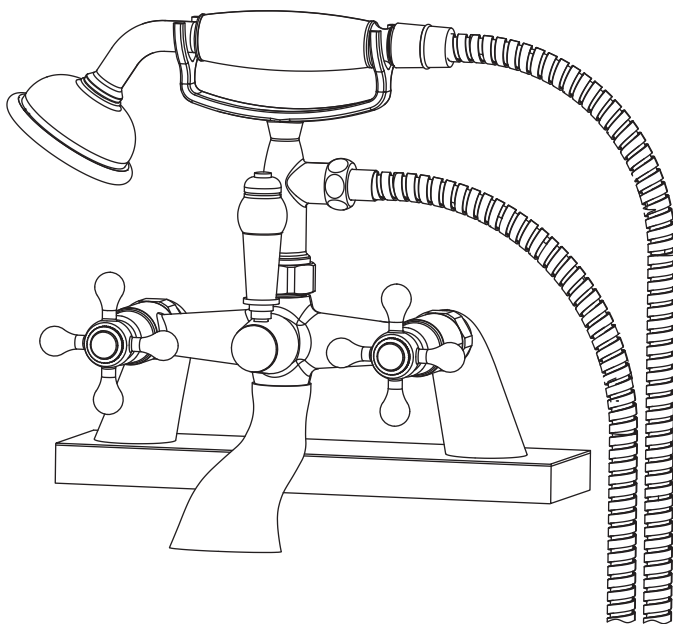

Fitting Instructions


Please follow them carefully and
leave this manual with end user

Before you begin:

1. **We recommend that this product is installed by a qualified tradesperson.** Victorian Plumbing Ltd. accept no liability for products incorrectly installed, or where the correct testing procedures have not been adhered to, thus resulting in the escape of water and consequential damage.
2. Ensure the supply pipes have been thoroughly flushed to remove any debris.
3. Ensure the incoming mains water supply is switched off prior to commencing the installation.
4. Observe all local plumbing and building codes & regulations.
5. Unpack the product then read these instructions before proceeding. Inspect the product for damage. If any damage is found, contact our Customer Relations team.

Fitting List:

Diagrams are for illustration purposes only. Your Mixer Tap may superficially differ from this drawing however the installation guide steps still apply.

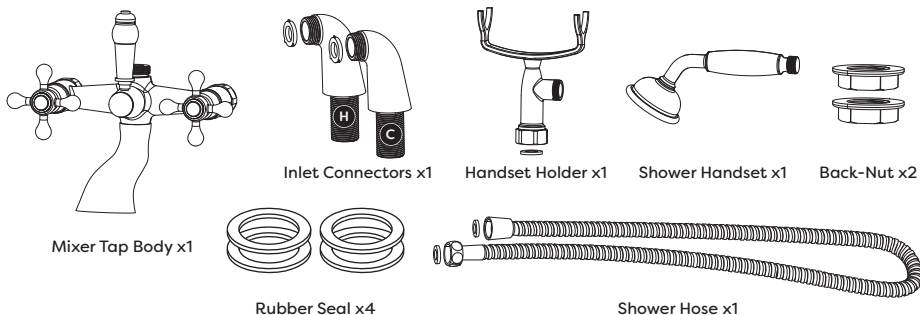


Installation:

Step 1:


Screw the 'Hot and Cold Inlet Connectors' to the 'Mixer Tap Body' and tighten with an adjustable wrench.

Place the handset holder over the top outlet of the 'Mixer Tap Body' and tighten.

(Be careful not to overtighten.)

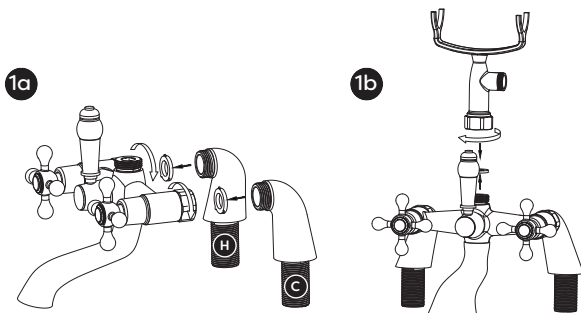


2

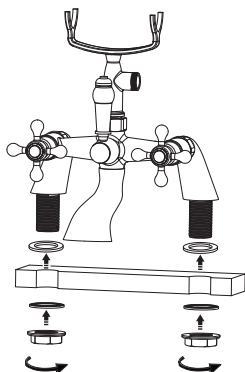


Step 2:

Secure the body to the bath/deck by using the 'Rubber Seals' and 'Back-Nuts' below the bath/deck. Tighten the 'Back-Nuts' onto the threaded tails with an adjustable wrench.

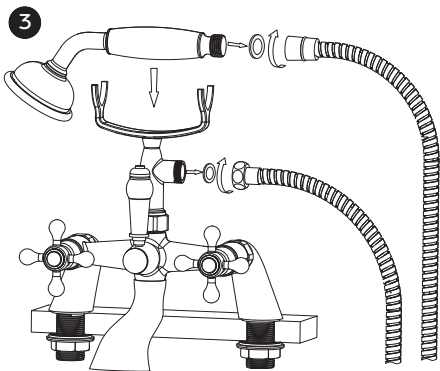

Step 3:

Attach the 'Shower Hose' to the outlet of the 'Handset Holder' and threaded tail of the 'Shower Head'.

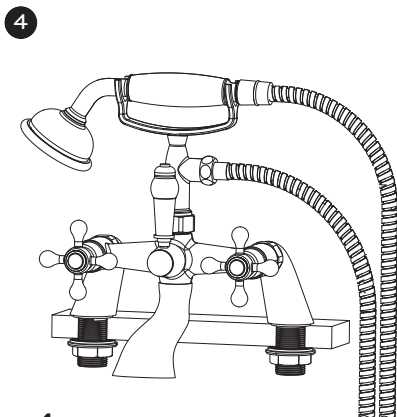


Step 4:

Connect the hot and cold water supply pipes/hoses to the threaded tails of the 'Inlet Connectors'. Turn on the mains water supply, run the tap and check all joints/connections for any leaks.


Note: Ensure the hot and cold connections are attached to the correct side of the tap. Hot on the left and cold on the right when viewed from the front.

Operation:

Flow Control

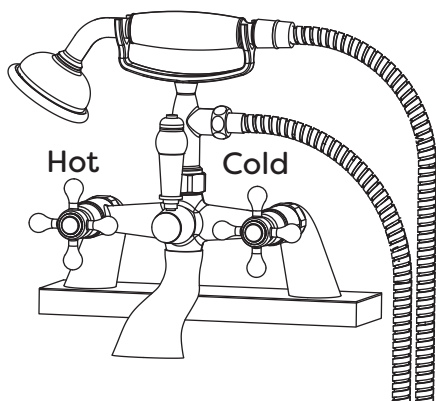

Diverter Operation

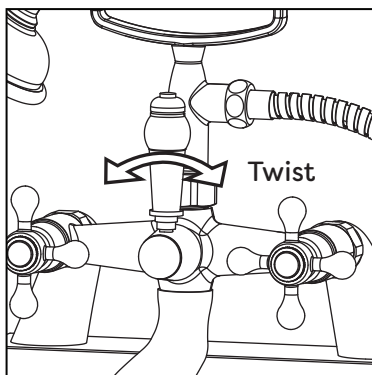

Aftercare:

Always clean the surface of tap to keep it bright. **Attention:** please do not use inappropriate tools such as sharp brushes, rough sponges, scouring pads or detergent/acidic products to clean the tap. Please clean the tap by wet cloth and soapy water. Then rinse the soap out with clean water and dry with a soft cotton cloth.

Troubleshooting

FAULT	POSSIBLE CAUSE
Taps do not turn on	• Closed isolation valve. • Mains water supply turned off.
Water dripping from taps	• This is normal for a short time after using the taps. • If water continues to drip, possible build up of limescale in the cartridge valve.
Low or no flow rate	• Partially closed isolation valve. • Instantaneous water heater cycles on and off as flow rate pressure is too low. • Head of water is below the minimum distance required. • Hot or cold water being drawn off elsewhere causing pressure changes or instantaneous boiler temperature changes. • Airlock or partial blockage in the supply pipework.

Recycling and Disposal:

Please recycle the packaging in accordance with your local government regulations on waste handling and follow the same advice at the end of the products life.

