




DENO - 500

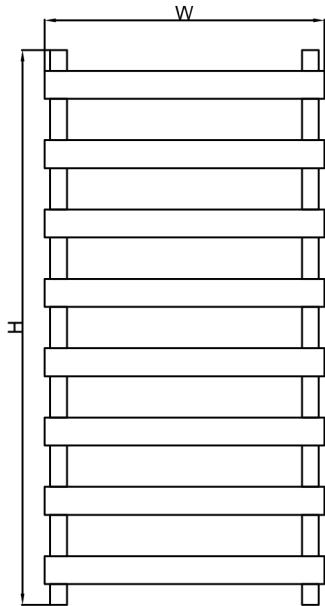


Front View

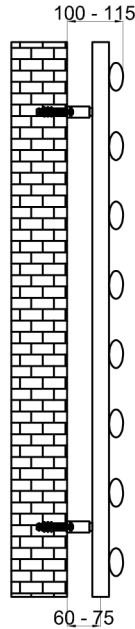

Side View

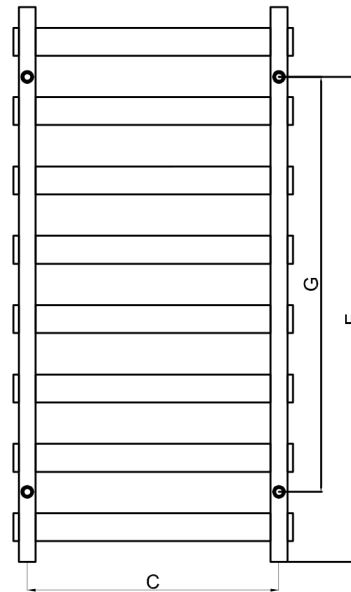

Back View

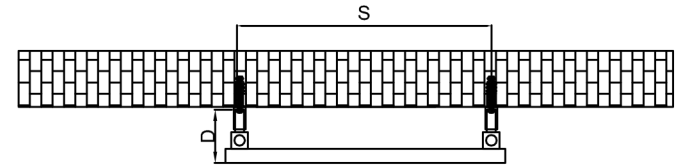

Top View

SUPPLIED INSTALLATION ACCESSORIES



SCREW 4 PCS



WALL PLUG 4 PCS



BRACKET 4 PCS



GRAB SCREW 4 PCS



ALIEN KEY 1 PCS




AIR VENT 1 PCS



BLANKING PLUG 1 PCS

-Vertical Mounting
-Optional 304 QUALITY STAINLESS STEEL TOWEL RADIATOR: (RNS-DE510B : DENO RADIATORS)
-POLISHED & BRUSHED
-Max Operational Pressure: 10 Bar
-Inlet/Outlet: 1/2" Female Pipe Thread
-All Dimensions are in mm

MATERIAL DETAILS



Product Name	Product Code	Height	Width	Thickness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger to Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
		H	W	D	C	S	F	G	-	-	Watt - BTU/hr (Δ50°)
		mm	mm	mm	mm	mm	mm	mm	L	kg	
DENO 496 X 500	RNS - DE505B	496	500	95	450	450	371	246	2.13	3.28	280 - 955
DENO 992 X 500	RNS - DE510B	992	500	95	450	450	867	742	4.26	6.55	560 - 1911
DENO 1488 X 500	RNS - DE515B	1488	500	95	450	450	1363	1238	6.39	9.83	841 - 2867
DENO 496 X 500	RNS - DE505P	496	500	95	450	450	371	246	2.13	3.28	280 - 955
DENO 992 X 500	RNS - DE510P	992	500	95	450	450	867	742	4.26	6.55	560 - 1911
DENO 1488 X 500	RNS - DE515P	1488	500	95	450	450	1363	1238	6.39	9.83	841 - 2867

REINA