




HELIN - 500

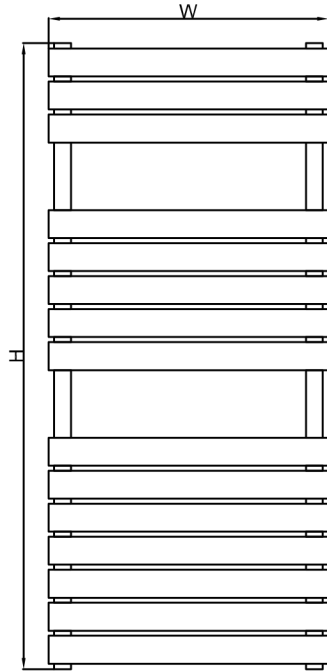


Front View

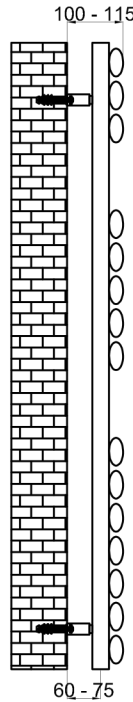

Side View

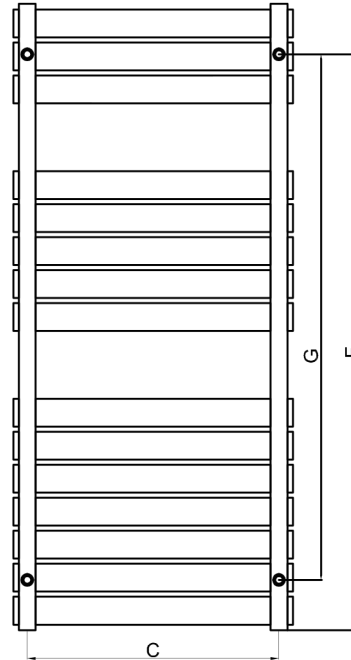

Back View

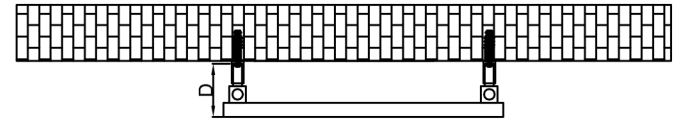

Top View

SUPPLIED INSTALLATION ACCESSORIES



SCREW 4 PCS



WALL PLUG 4 PCS



BRACKET 4 PCS



GRAB SCREW 4 PCS



ALIEN KEY 1 PCS




AIR VENT 1 PCS



BLANKING PLUG 1 PCS

MATERIAL DETAILS



-Vertical Mounting
-Optional 304 QUALITY STAINLESS STEEL TOWEL RADIATOR: (RNS-HLN5112P : HELIN RADIATORS)
-POLISHED
-Max Operational Pressure: 10 Bar
-Inlet/Outlet: 1/2" Female Pipe Thread
-All Dimensions are in mm

Product Name	Product Code	Height	Width	Thickness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger to Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
		H	W	D	C	S	F	G	-	-	Watt - BTU/hr (Δ50°)
		mm	mm	mm	mm	mm	mm	mm	L	kg	
HELIN 826 X 500	RNS - HLN5080P	826	500	95	450	450	736	637	5.17	7.10	774 - 2640
HELIN 1120 X 500	RNS - HLN5112P	1120	500	95	450	450	1030	940	7.71	10.34	1084 - 3696
HELIN 1535 X 500	RNS - HLN5153P	1535	500	95	450	450	1445	1355	10.30	13.90	1396 - 4762

