




# KREON - 500

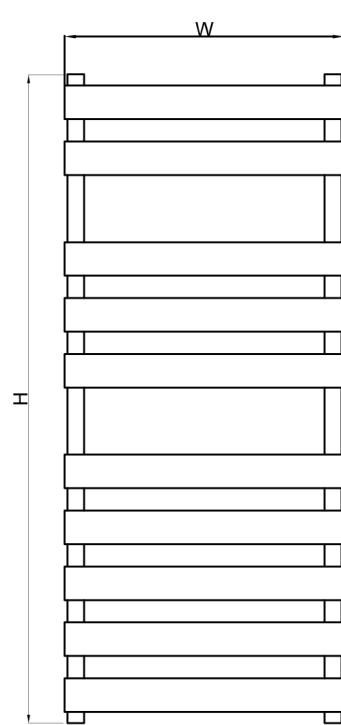


**Front View**

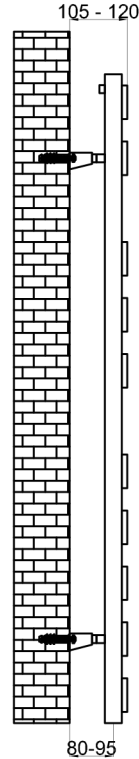

**Side View**

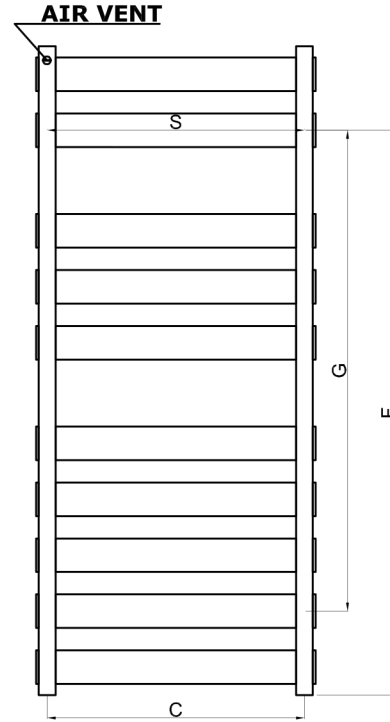

**Back View**

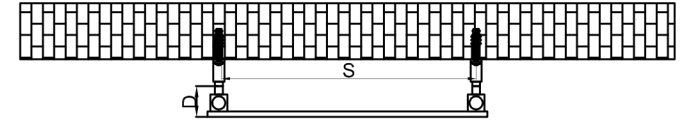

**Top View**

## SUPPLIED INSTALLATION ACCESSORIES



SCREW 4 PCS



WALL PLUG 4 PCS



INSERT 4 PCS



GRAB SCREW 4 PCS




BRACKET 4 PCS



ALIEN KEY 1 PCS

## MATERIAL DETAILS



-Vertical Mounting
-Optional 304 QUALITY STAINLESS STEEL TOWEL RADIATOR: (RNS-KN5116 : KREON RADIATOR )
-POLISHED
-Max Operational Pressure: 10 Bar
-Inlet/Outlet: 1/2" Female Pipe Thread
-All Dimensions are in mm

Product Name	Product Code	Height	Width	Thickness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger to Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
		H	W	D	C	S	F	G	-	-	Watt - BTU/hr (Δ50°)
		mm	mm	mm	mm	mm	mm	mm	L	kg	
<b>KREON 780 X 500</b>	<b>RNS-KN5078</b>	780	500	55	460	460	630	480	2.53	7.76	657 - 2240
<b>KREON 1160 X 500</b>	<b>RNS-KN5116</b>	1160	500	55	460	460	1010	860	3.69	11.21	839 - 2860

