




ODIN - 1800 - 2000

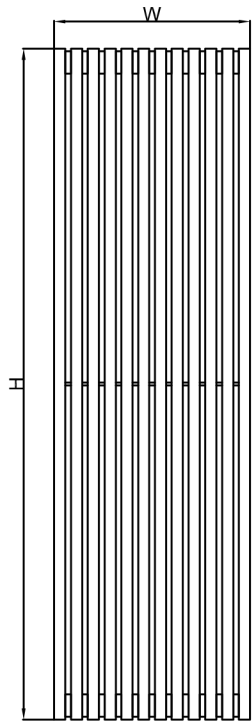


Front View

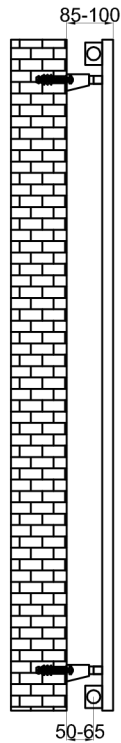

Side View

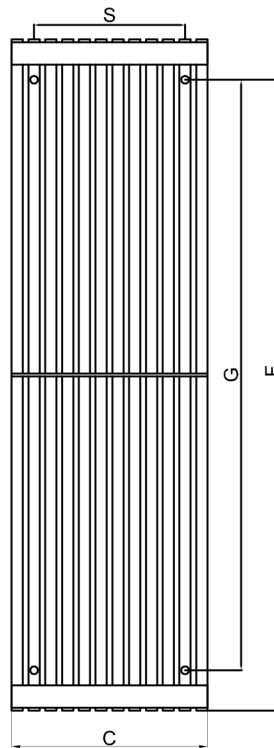

Back View

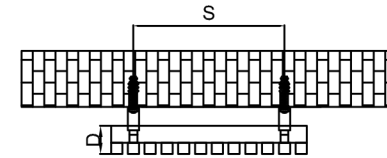

Top View

SUPPLIED INSTALLATION ACCESSORIES



SCREW 4 PCS



WALL PLUG 4 PCS



BRACKET 4 PCS



GRAB SCREW 4 PCS



ALIEN KEY 1 PCS




AIR VENT 1 PCS



BLANKING PLUG 1 PCS

-Vertical Mounting
-Optional 304 QUALITY STAINLESS STEEL RADIATOR: (RNS-ODN3518 : ODIN RADIATORS)
-BRUSHED
-Max Operational Pressure: 10 Bar
-Inlet/Outlet: 1/2" Female Pipe Thread
-All Dimensions are in mm

MATERIAL DETAILS



Product Name	Product Code	Height	Width	Thickness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger to Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
		H	W	D	C	S	F	G	-	-	Watt - BTU/hr (Δ50°)
		mm	mm	mm	mm	mm	mm	mm	L	kg	
ODIN 1800 X230	RNS-ODN2318	1800	230	50	230	150	1728	1656	4.62	11.14	975 - 3325
ODIN 1800 X 350	RNS-ODN3518	1800	350	50	350	270	1728	1656	6.94	16.72	1463 - 4990
ODIN 1800 X 470	RNS-ODN4718	1800	470	50	470	390	1728	1656	9.26	22.31	1952 - 6656
ODIN 2000 X230	RNS-ODN2320	2000	230	50	230	150	1928	1856	5.08	12.29	1083 - 3694
ODIN 2000 X 350	RNS-ODN3520	2000	350	50	350	270	1928	1856	7.63	18.46	1626 - 5544
ODIN 2000 X 470	RNS-ODN4720	2000	470	50	470	390	1928	1856	10.18	24.62	2169 - 7396

