

HOME

SERIES



Compact
Vertical Line
Concept

50 Δ t
(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
			Watts	Btu/h		Watts	Btu/h
600	400	51601104h	348	1187	51602204h	640	2184
	600	51601106h	522	1781	51602206h	961	3279
	700	51601107h	609	2078	51602207h	1121	3825
	800	51601108h	696	2375	51602208h	1281	4371
	900	51601109h	783	2672	51602209h	1441	4917
	1000	51601110h	870	2968	51602210h	1601	5463
	1100	51601111h	957	3265	51602211h	1761	6009
	1200	51601112h	1044	3562	51602212h	1921	6554
	1400	51601114h	1218	4156	51602214h	2241	7646

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV




UIN	Elements
14531310	CENTRE TAP TRV STRAIGHT WHITE - 10MM
14531312	CENTRE TAP TRV STRAIGHT WHITE - 1/2IN
14531315	CENTRE TAP TRV STRAIGHT WHITE - 15MM
14531410	CENTRE TAP TRV STRAIGHT CHROME - 10MM
14531412	CENTRE TAP TRV STRAIGHT CHROME - 1/2IN
14531415	CENTRE TAP TRV STRAIGHT CHROME - 15MM
14531510	CENTRE TAP TRV ANGLED L WHITE - 10MM
14531512	CENTRE TAP TRV ANGLED L WHITE - 1/2IN
14531515	CENTRE TAP TRV ANGLED L WHITE - 15MM
14531610	CENTRE TAP TRV ANGLED L CHROME - 10MM
14531612	CENTRE TAP TRV ANGLED L CHROME - 1/2IN
14531615	CENTRE TAP TRV ANGLED L CHROME - 15MM

COMPACT VERTICAL LINE CONCEPT




WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.

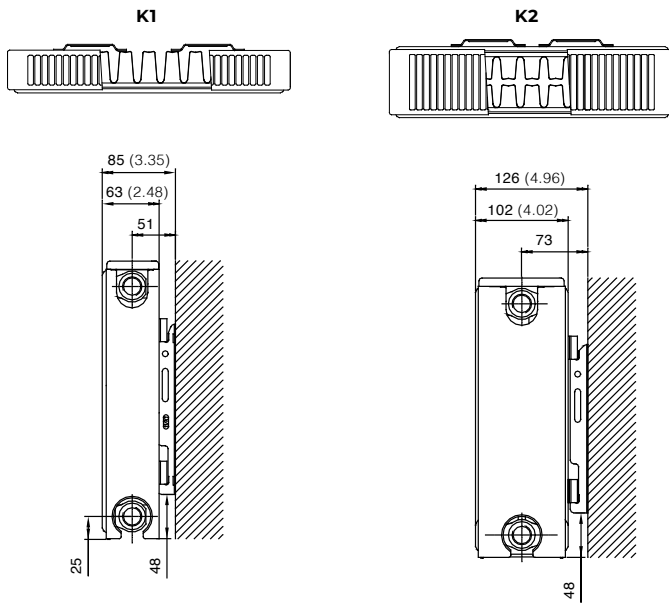

MOUNTING BRACKETS



All dimensions in mm. Inches in brackets. Floor mounting brackets available.

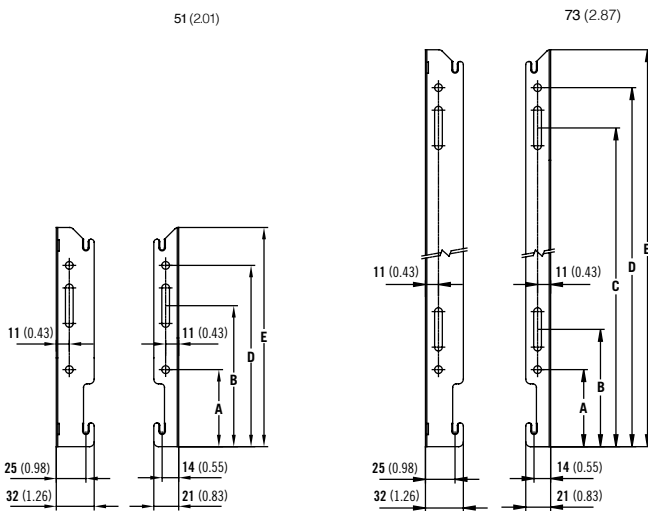

Dimensions	mm	inches	mm	inches	mm	inches
Height	300	11.81	450	17.72	600	23.62
A	65	2.56	65	2.56	65	2.56
B	119	4.69	99	3.90	99	3.90
C	-	-	269	10.59	419	16.50
D	153	6.02	303	11.93	453	17.83
E	185	7.28	335	13.19	485	19.09

K1 & K2 LUG POSITIONS

All dimensions in mm. Inches in brackets.

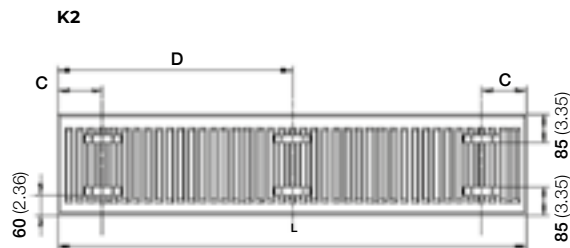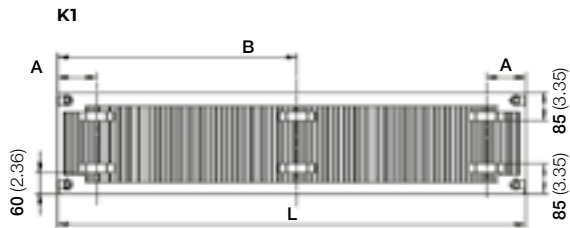


L	K1				K2			
	A		B		C		D	
	mm	in	mm	in	mm	in	mm	in
400	117	4.60	-	-	133	5.24	-	-
500 - 1100	150	5.90	-	-	133	5.24	-	-
1200 - 1600	150	5.90	-	-	133	5.24	-	-
1800 - 2000	150	5.90	(L/2) +17		133	5.24	L/2	

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


PIPING OPTIONS

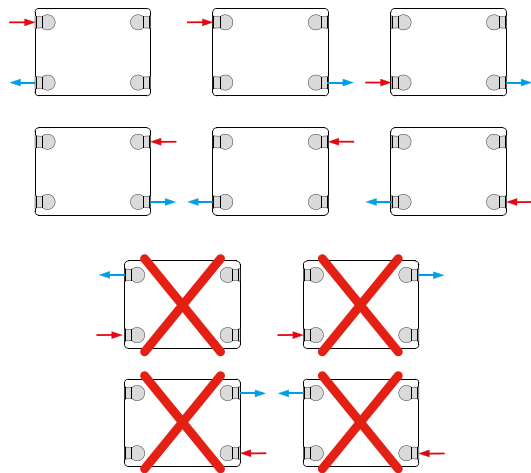

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K1	K2
Height	600	600
W/m at 75/65/20	870	1601
n-coefficients	1.28	1.31
Weight (kg/m)	24.27	38.40
Water contents (l/m)	3.23	6.20
K_M	5.89	9.37

PRESSURE DROPS

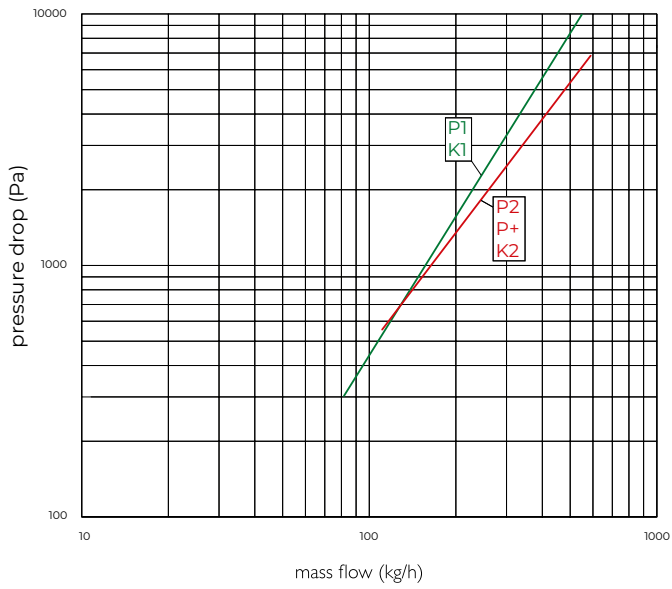

Type	Kv
P1 / K1	1.60
P2 / P+ / K2	1.85