


CRUZ

BASIN MIXER with pop-up waste
BASIN MIXER without pop-up waste
BIDET MIXER with pop-up waste



Installation & Aftercare Instructions

Please retain for future reference

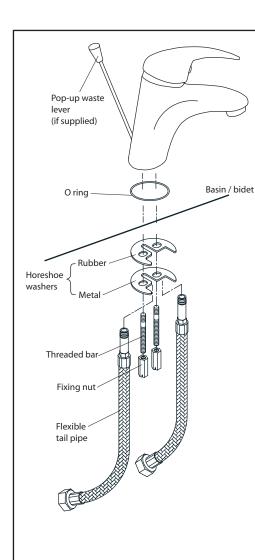


INSTALLATION PROCEDURE


- **1.** Prior to installation flush out the pipe work to remove debris & then ensure that the water supply is turned off.
- **2.** Refer to diagram & check that all components are present.
- **3.** Fit the flexible tail pipes to the basin or bidet mixer body using an appropriate spanner, making sure that you do not over tighten.
- **4.** Attach the threaded bars supplied to the base of the mixer body in the orientation shown in the diagram. Screw the bars into the mixer body until the stop in the thread is reached.
- **5.** Fit the mixer body to the basin or bidet using the horseshoe washers & fixing nuts supplied in the sequence indicated on the drawing, DO NOT over-tighten as this may damage the basin / bidet. Remember to install the O ring between the mixer body & the basin or bidet.

For all models without a pop-up waste skip to step 7.

- **6.** Connect the pop-up waste mechanism (if supplied) as indicated in the diagram. The pop-up rod connector should be adjusted to allow for a smooth operation. The base of the plug should also be adjusted to allow it to open sufficiently for waste water to escape. Do not adjust such that the waste sits too high in the open position as this may cause the mechanism to stick.
- **7.** Connect the water supply to the flexible tails. Hot supply should always be connected to the left hand side.
- **8.** Fully open mixer on both hot & cold sides & allow water to run for approximately one minute to further flush the system.
- 9. Check all connections for leaks



Pop-up waste

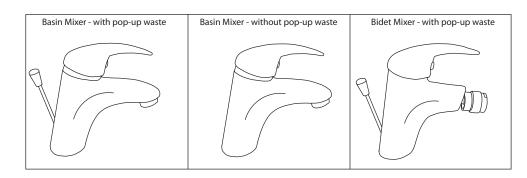

GENERAL NOTES

This mixer should be installed in accordance with water regulations. Approved check valves should be fitted where required. For further details please contact your local water authority. Should the mixer fail to operate effectively it may be that there is insufficient water pressure. Similarly, hot & cold water supplies should be relatively balanced for optimum performance. A reputable plumber will be able to advise on each of these issues.

AFTERCARE INSTRUCTIONS

Whilst this item has a high quality durable finish, it should nevertheless be treated with care. Surfaces should be cleaned using only a soft damp cloth and clean water & dried using a soft cotton cloth. Bath cleaning products, even non-scratch ones could damage the finished surface.

5-YEAR GUARANTEE

We have complete confidence in this Tavistock product and as such it is offered with a 5-year guarantee against defects in manufacture. The guarantee requires that this product be used in the manner for which it was intended and that it is installed & maintained in accordance with the fitting instructions and local water byelaws. The guarantee covers products in domestic use only. The guarantee is invalidated should the valve be damaged by water borne debris. Make sure that supply pipes are clear of any debris prior to installation, this is particularly important on new plumbing installations. In the unlikely event that this product should fail during the guarantee period we will either replace the faulty part or the complete unit as appropriate.