


#### Important notes:

- \* This unit is not designed for wall hung sanitary-ware
- \* It is essential that any surfaces of the unit which are cut during installation are re-sealed using an appropriate waterproof sealant, varnish or oil based paint. Failure to re-seal cut surfaces will invalidate the product warranty and may result in water damage.

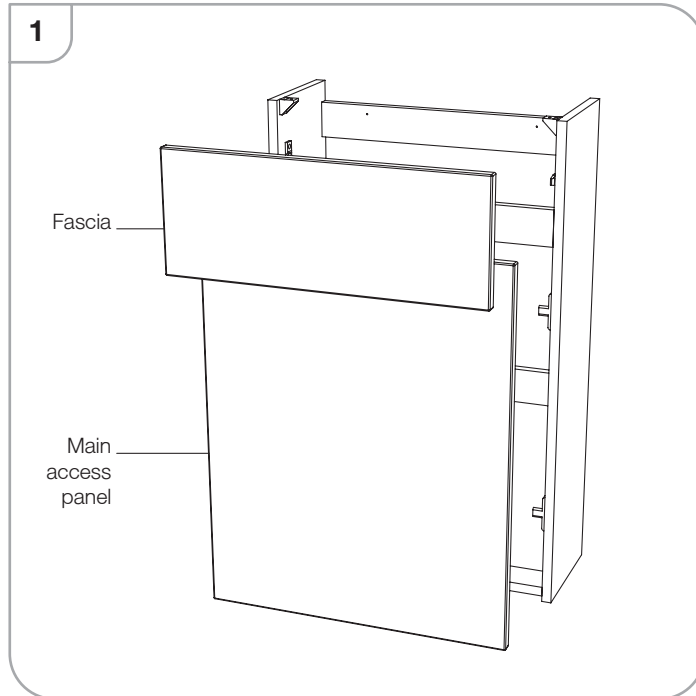

#### Installing WC / bidet

Please note that these instructions are a guide only and may not be appropriate for all installations. Fit WC / Bidet according to manufacturer's instructions. The main access panel and fascia are designed to be fitted / removed after the WC / bidet is installed.

A normal installation of a WC would be as follows:

1. Remove fascia by gently pulling it.
2. Remove main access panel by lifting vertically off the location clips.
3. Fit base unit to wall in required location ensuring correct position of supply and waste pipes.
4. Fit WC and cistern according to manufacturer's instructions - check system carefully for leaks.
5. Cut a suitable slot in the main access panel to allow for the soil pipe. Note: Cut this slot as wide as possible (without exposing the cut when the pan is in place) to make refitting the main access panel easier. The cut surfaces should then be sealed with an appropriate waterproof sealant. Refit the main access panel by sliding it back into position onto the location clips. Silicone the join between WC and access panel.
6. Fit worktop
7. Drill suitably positioned / diameter hole in the fascia for the cistern operating button and install according to manufacturers guidelines.
8. Re-fit fascia.

The installation of a bidet is identical, except there is no requirement for a cistern & operating button.

#### All wooden furniture should be treated with care...

##### We recommend



Wipe away any water splashes or condensation after use. Excessive exposure to water will deteriorate the furniture.



All bathrooms should be well ventilated with a suitable extractor fan.



Clean with a soft damp cloth only.



Use a wax free polish if one must be used. For removal of lime scale deposits use a suitable proprietary cleaner. If necessary test on an inconspicuous area first.

##### Please DO NOT...



Do not scrub or scour



Do not use abrasive cleaning agents

#### Replacement components

Should you require any replacement components for this product please contact Tavistock using the contact details below.