


# TECHNICAL DATA SHEET

## Traditional Thermostatic shower mixer with rigid riser rail kit

Construction	Brass Body (CuZn40Pb18); Ceramic & zinc alloy Handle
Finishes	Chrome plated to BS EN 248
Product Type	Contemporary
Water Pressure	Min. 0.5 bar, Max. 6.0 bar
Plumbing Systems	Suitable for all plumbing systems, preferably balanced Min. supply pressure differential requirement is 5:1
Standards	Complies with BSEN 1111
Certification	-
Cartridge	Thermostatic
Check valve	0.5-10 gpm
Diverter	Ceramic disc valves
Fitting	15mm Compression
Packaging	-

- Additional Information**
1. Thermostatic cartridge maintains showering temperature to +/- 1°C by compensating for changes in the incoming water temperature and pressure giving the stable outlet.
  2. Automatic shut off in the event of hot or cold water supply failure.
  3. Stainless steel tube
  4. Slider brass handset holder & ceramic lever
  5. Shower head : Brass Ø200mm

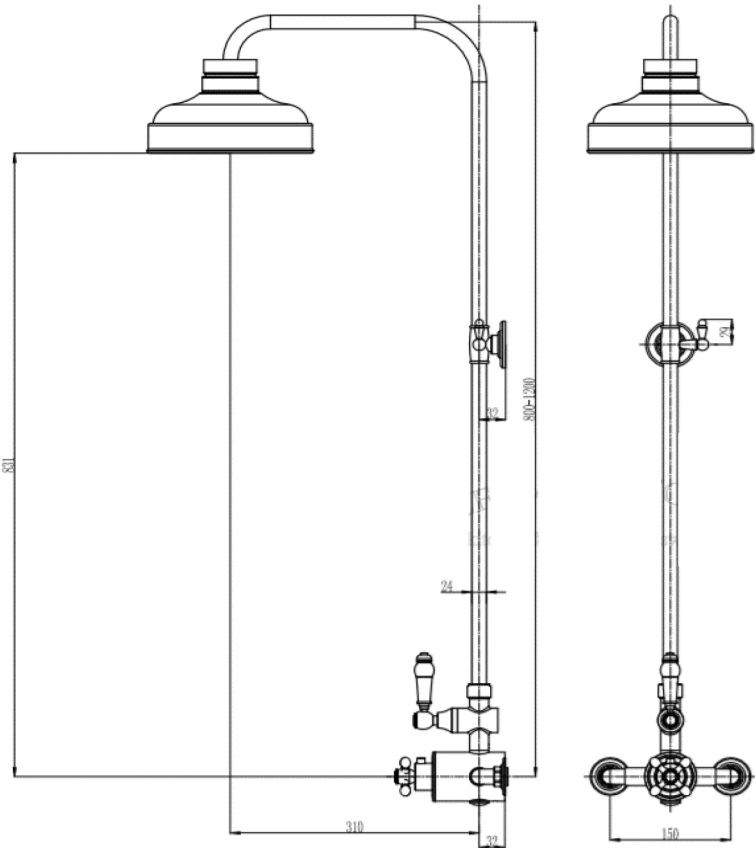

### Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	-	5.6	-	8.8	13.8	17.8	20.8	25.7	-	-

All dimensions are in millimetres unless otherwise stated. The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.