

INSTALLERS PLEASE NOTE THESE INSTRUCTIONS ARE TO BE LEFT WITH THE USER

2180621B February 2008

## SHOWER ARM (bottom entry fitting) Material: Brass construction

## **INSTALLATION**

**Note:** Before installation, it is advised that the mounting surface is made good to give a solid fixing point for the shower arm. It is not advised to fix the arm through plasterboard alone.

Offer the \*shower arm up to the wall and mark the three fixing holes, make certain that the shower arm is aligned vertically above the mixer shower **(fig.1).** Remove the shower arm and drill the fixing holes.

## WARNING!

Check there are no hidden cables or pipes before drilling holes for wall plugs. Use great care when using power tools near water. The use of a residual current device (RCD) is recommended.


Push fit the shower arm on to the riser pipe (taking care not to damage the O-ring) and using appropriate wall plugs and screws secure to the wall **(fig.2)**.




NOTE:

Make sure the end of the pipework is clean and remove any sharp burrs, failure to do so may cause damage to the O ring.

\*Only shower arm supplied. Other items are for illustration purposes only.



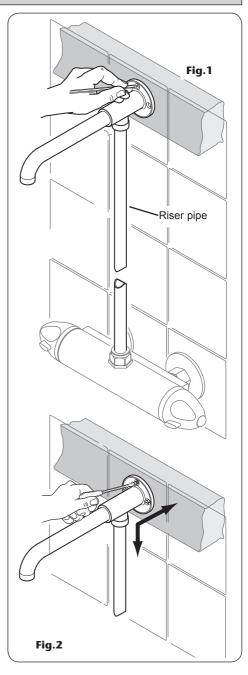

Please refer to shower installation and operating instructions for service details. E&OA.