



# Installation Instructions





















**BB8Q2D/BB9Q2D/BB976Q2D/BB18Q2D/BB128Q2D/BB129Q2D**




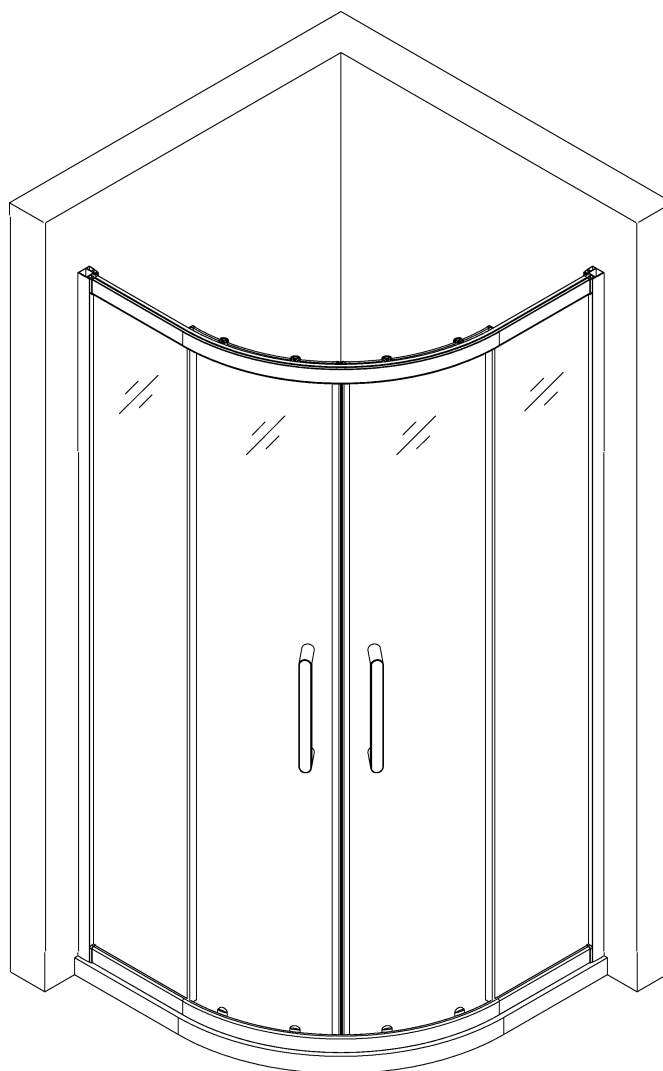

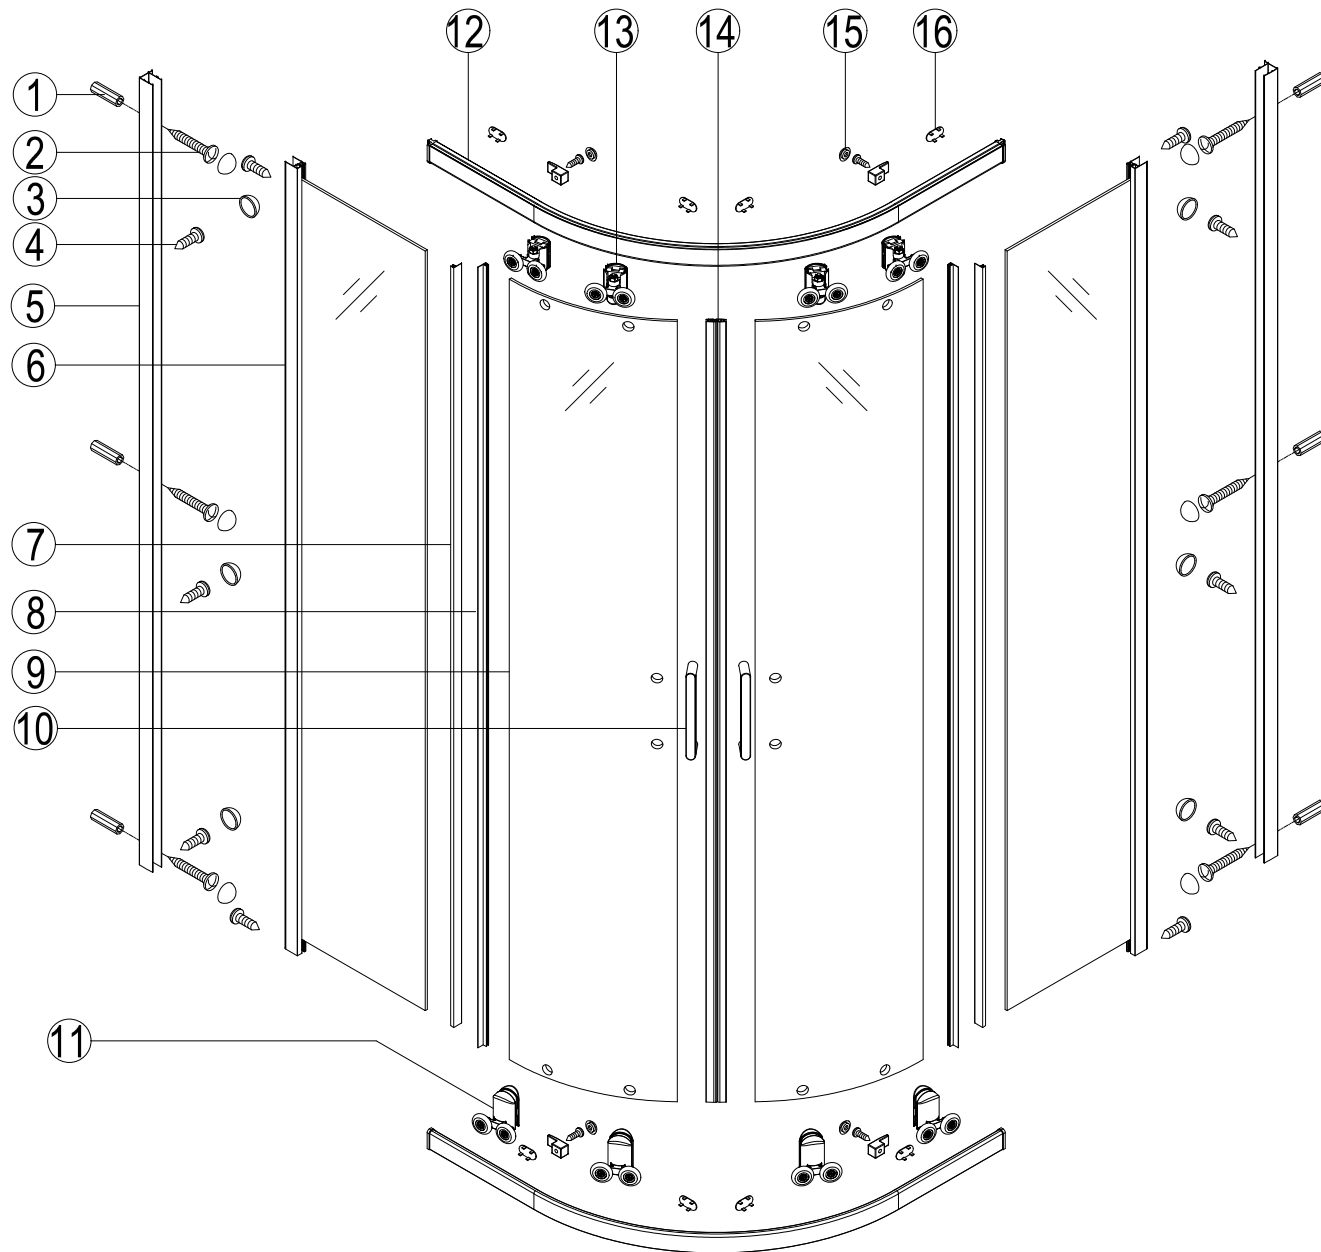







1		2		3		4		5		6		7		1760mm														
D6x30	6Pcs	ST4X30	6Pcs	JRF-6Y04	12Pcs	ST4X12	14Pcs	JRF-6W01	2Pcs		2Pcs	JRF-6Z02	2Pcs															
8		9		10		11		12		13		14		1822mm														
JRF-6Z02	2Pcs		2Pcs	JRF-6X01	2Pcs	JRF-6X02	4Pcs	JRF-6W06-11	2Pcs	JRF-6X03	4Pcs	JRF-6Z01	1Pair															
15		16		17		18		<table><tr><td></td><td>800*800</td><td>900*900</td><td>760*900</td><td>800*1000</td><td>800*1200</td><td>900*1200</td></tr><tr><td>12</td><td>JRF-6W06</td><td>JRF-6W07</td><td>JRF-6W08</td><td>JRF-6W09</td><td>JRF-6W10</td><td>JRF-6W11</td></tr></table>								800*800	900*900	760*900	800*1000	800*1200	900*1200	12	JRF-6W06	JRF-6W07	JRF-6W08	JRF-6W09	JRF-6W10	JRF-6W11
	800*800	900*900	760*900	800*1000	800*1200	900*1200																						
12	JRF-6W06	JRF-6W07	JRF-6W08	JRF-6W09	JRF-6W10	JRF-6W11																						
JRF-6Y02	4Pcs	JRF-6Y05	8Pcs	JRF-6Y01	6Pcs	JRF-6C1	2Pcs	Tools:																				

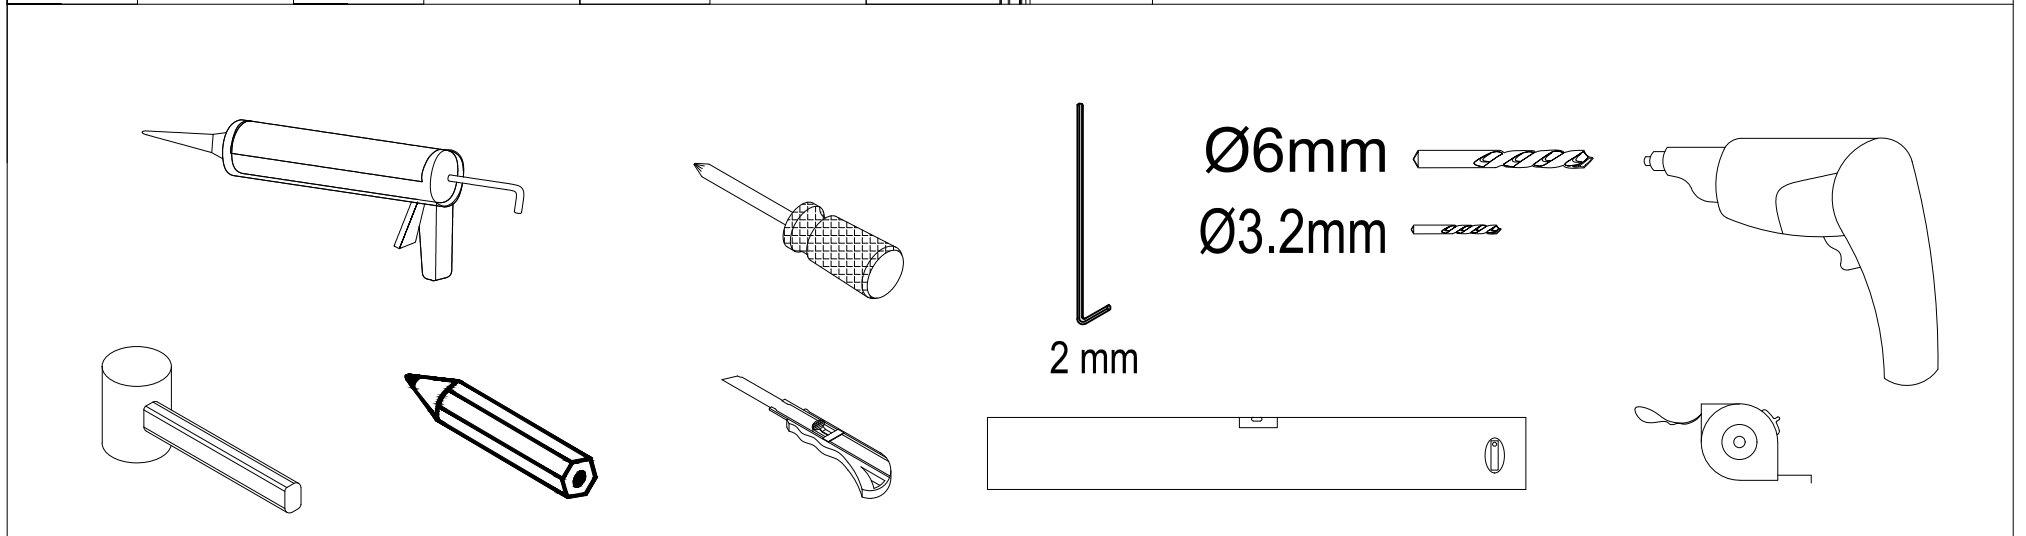






	L	W
800*800	760-780	760-780
900*900	860-880	860-880
760*900	720-740	860-880
800*1000	760-780	960-980
800*1200	760-780	1160-1180
900*1200	860-880	1160-1180

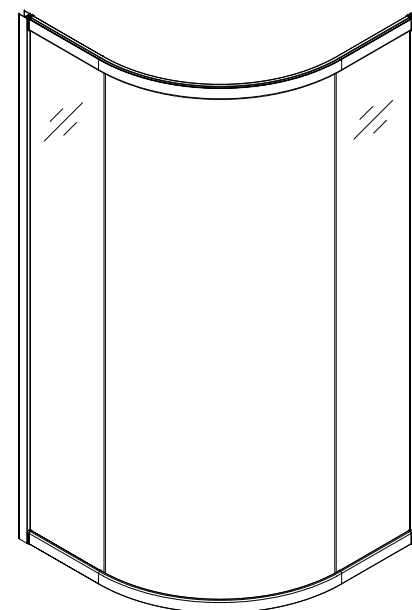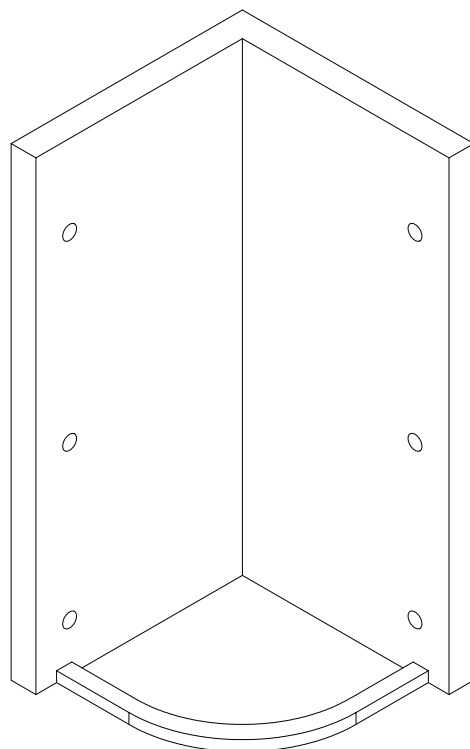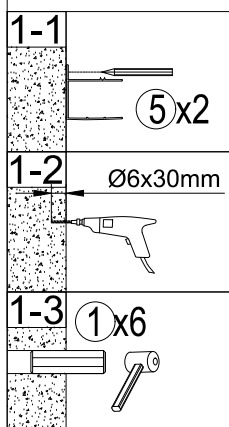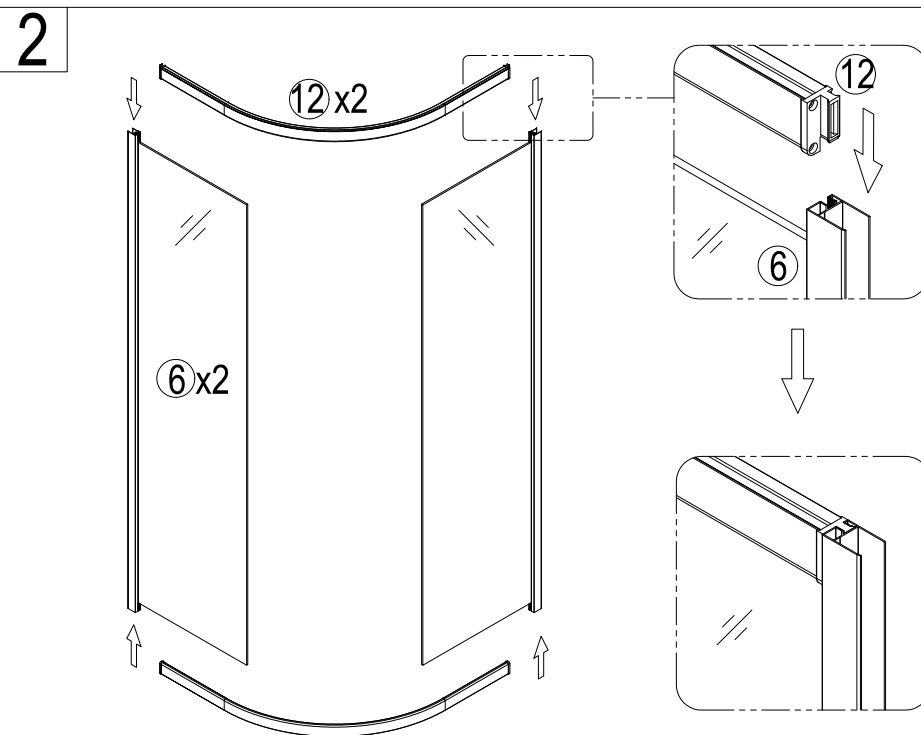





3

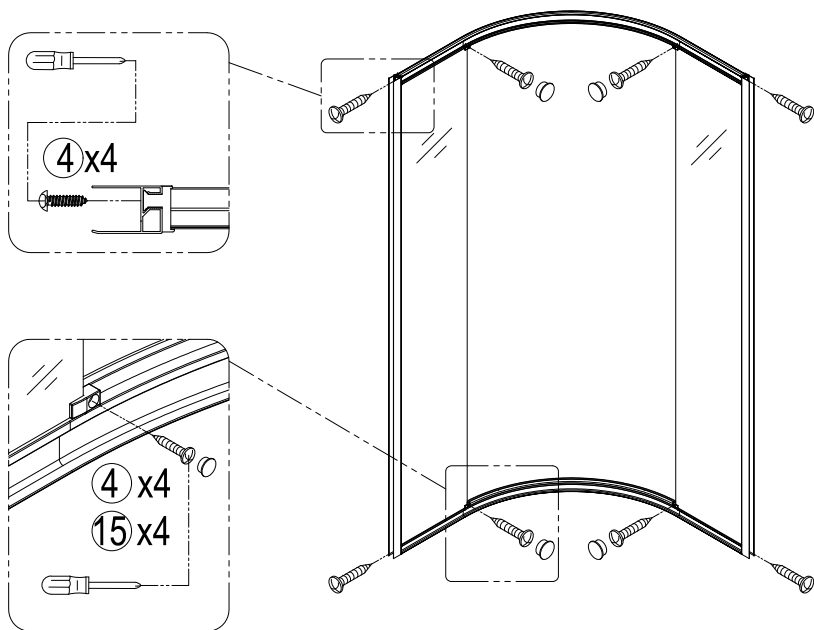

4

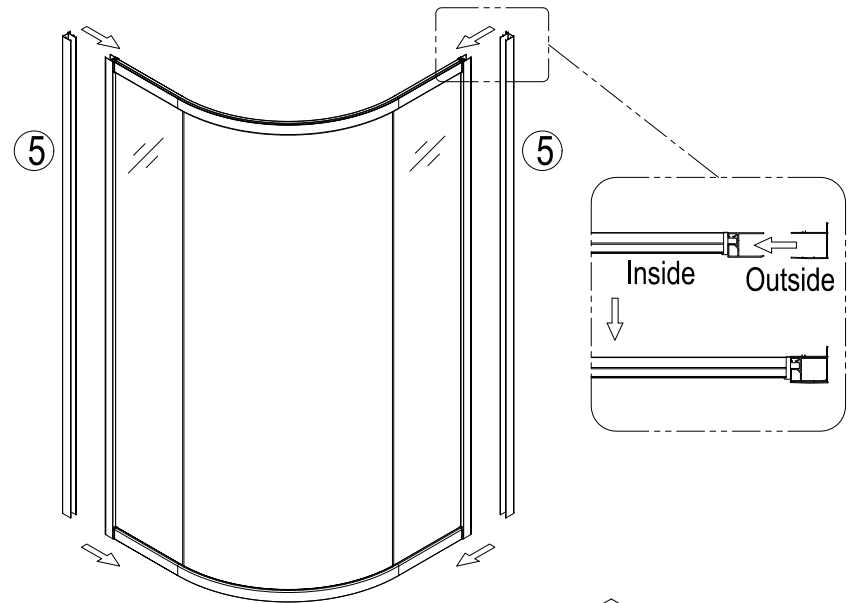

4-1















## 7-a Without concealed profile

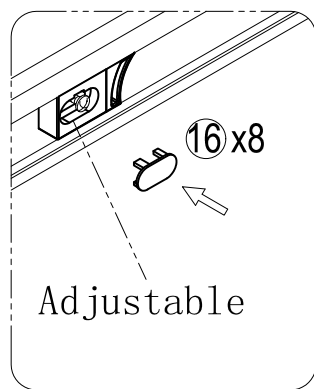
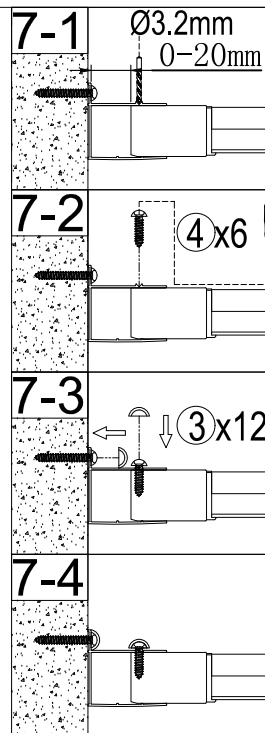
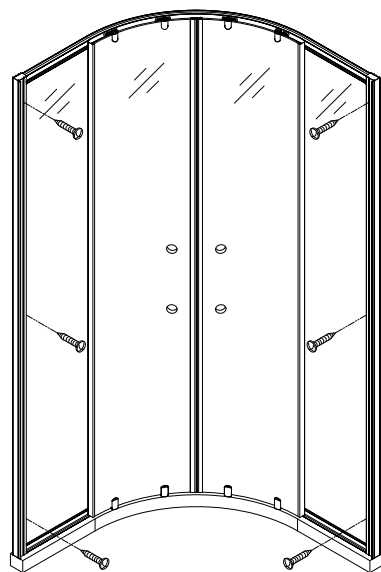


## 7-b With concealed profile

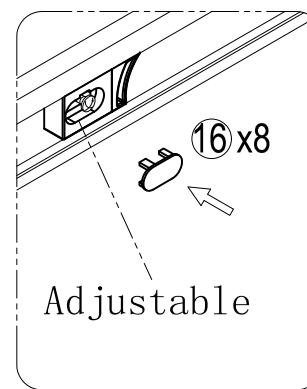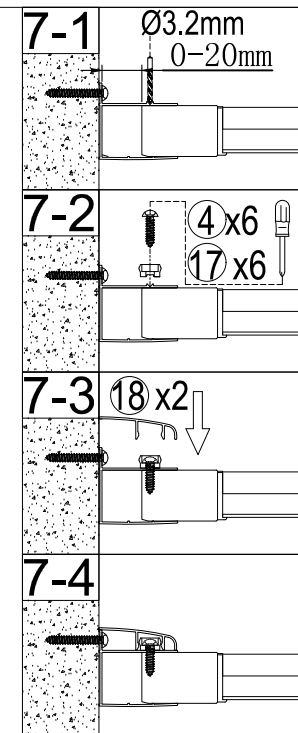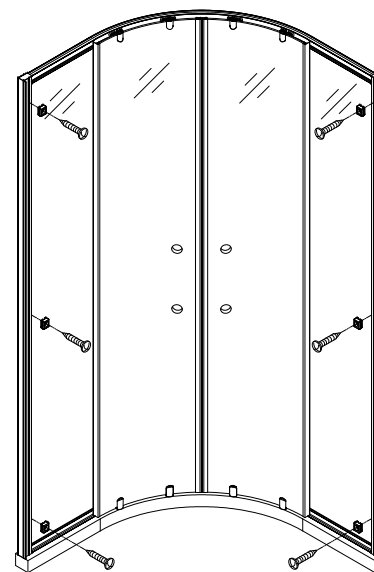




8

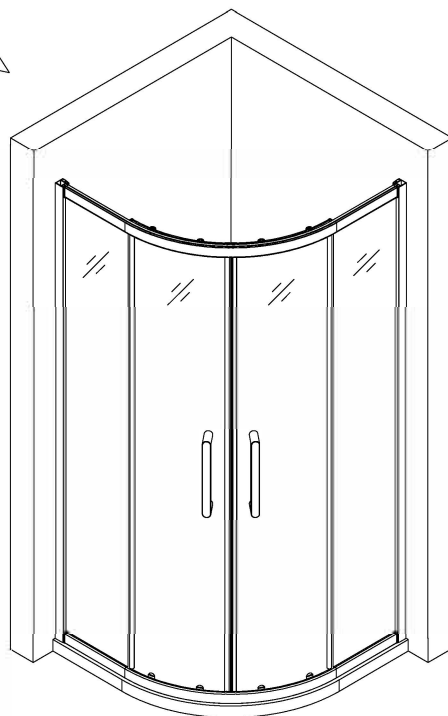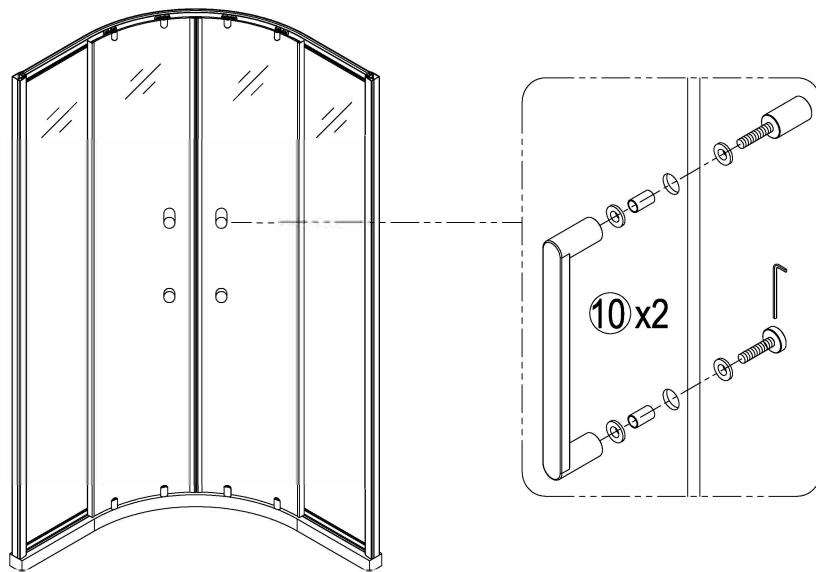

9

Care Instructions:

Do not use your shower enclosure within 24 hours of assembly.

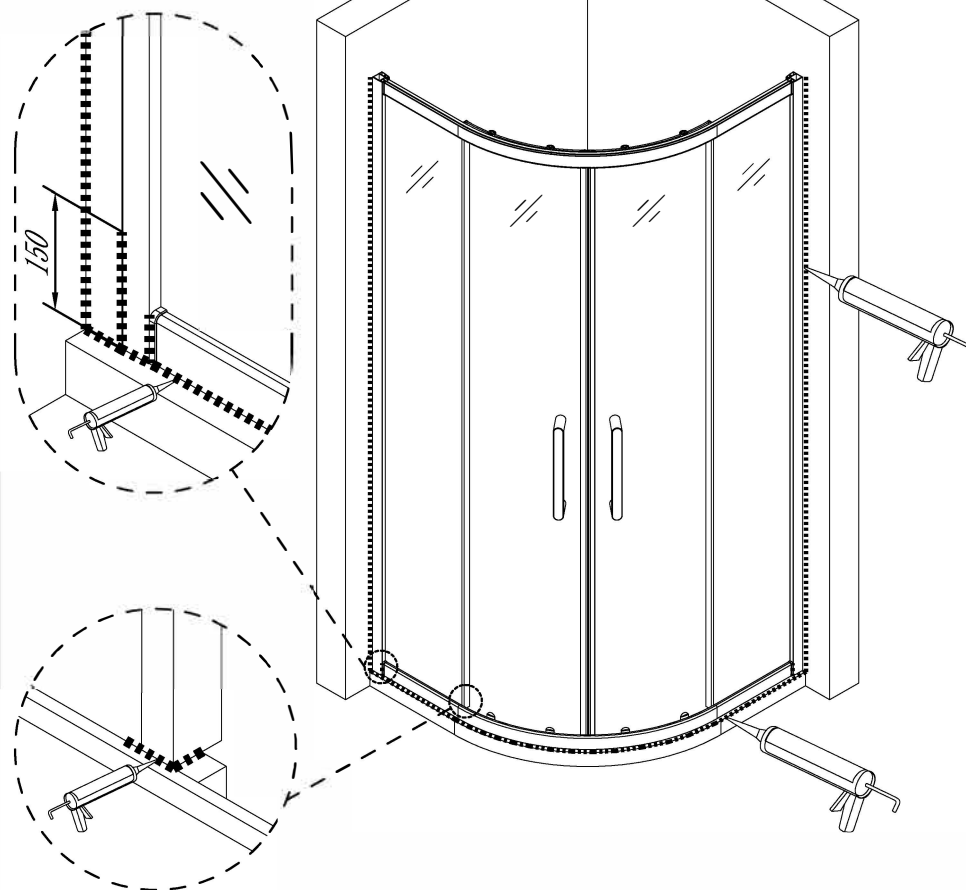



# **Safety Information for User & Installer**

## **Important information for fitter:**

- It is recommended that only approved/qualified plumbers should install the product.
- Incorrect installation of the enclosure will invalidate guarantee.

## **Safety information prior to and during installation**

Carefully check the product for transport damage prior to installation.

Never install damaged panels as there is a risk of spontaneous glass breakage. The supplied fixings/wall plugs are only for mounting directly on solid walls.

It is essential that the solid, masonry/walls be inspected for adequate load-bearing capacity prior to every installation. The supplied fixings/wall plugs are not for use with stud walls such as plaster board, wood, metal or fiber board.

Always seek professional advice to confirm wall type and appropriate type of fixing to be used for installation. Always check walls for concealed utility lines (power, gas, and water) prior to drilling the fixing holes.

## **Special information on handling glass**

- Always protect all glass edges from damage.
- Never stand the glass on its corners throughout the installation! Place the packing material beneath the glass panel; never place the glass on tiles, concrete floors or similarly hard surfaces
- It is mandatory to check each glass panel for damage prior to installation. Never install damaged glass panels as this could cause spontaneous glass breakage!
- If the glass panel is damaged during use it must be replaced without delay. (Failure could cause a risk of spontaneous glass breakage!)

## **Prevent damage to glass or operation of the product.**

- Ensure fittings do not hinder the movement of the door.
- Ensure that no objects are within the range of the door opening/ closing area.
- Avoid hitting the panels with hard objects such as mops when cleaning or tools during assembly. Damaged panels must be replaced as failures may cause latent glass breakage.
- Do not hit against the glass edge with hard or pointed objects (e.g. with mop handle) Damaged panels must be replaced; damage may cause spontaneous glass breakage.
- Do not use panels or handles to hang or support items such as drying towels or clothes.

# **Maintenance Information**

## **Service/repair and inspection for safety.**

- After cleaning, check all the moving elements are sufficiently greased, re-grease, if necessary only use acid-free grease.

## **Cleaning**

Do not use steam cleaners, caustic or aggressive cleaning and scouring agents, cleaners that corrode plastics, or solvents containing acetone or turpentine or neat bleach.

- Do not use any cleaning agents, which according to the manufacturer's specifications may corrode aluminium or light alloys.
- Do not use glass cleaning pastes and micro-fibre cloths to prevent damage to glass coating system.
- In order to prevent the build-up of lime scale, remove any remaining drops of water after showering using a squeegee, soft cloth without any cleaning agent.
- After use, carefully rinse off all residue such as; liquid soaps, shampoos, shower gels or similar cosmetic product with water to avoid deposits.

**Important:** Never apply the cleaning agent for longer than necessary. After cleaning, check all the moving elements are sufficiently greased, re-grease, if necessary.

## **Recycling and disposal**

Please recycle the packaging in accordance with your local government regulations on waste handling, and follow the same advice at the end of the products life.

## **For more Information**

Visit: [victorianplumbing.co.uk](http://victorianplumbing.co.uk)