



# WC pan connectors



**WARNING**  
We accept no liability for products fitted incorrectly, and where the correct testing procedures have not been used, resulting in the escape of water.

**For more information please contact:**

**VIVA Sanitary**  
Units 1-2 Capitol Trading Park,  
Kirkby Bank Road  
Knowsley Industrial Estate,  
Liverpool, L33 7SY

**Tel:** 0151 546 0531

**Fax:** 0151 549 4187

**E-mail:** sales@vivasanitary.co.uk

**www.vivasanitary.co.uk**

**Please note: Save this instruction sheet for future reference**

**IMPORTANT: DO NOT use plumber's putty to seal this fitting**

Installation videos and further information available now.




## EASI-FIT


### Rigid WC Pan Connectors

All with 90 - 107mm Inlet  
(Excluding Extension with 110mm Inlet)  
All with 90 - 110mm Outlet


1. Prior to installation check WC connector .
2. Ensure your WC and outlet pipe are ready for installation.
3. For ease of fitting we would recommend using a water based lubricant on both the inlet and outlet rubber seals.
4. On completion of installation test in accordance with current British Standard guidelines.

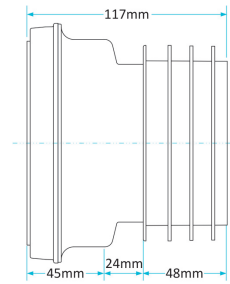


**Product Code** PP0001  
**Description** Straight Connector

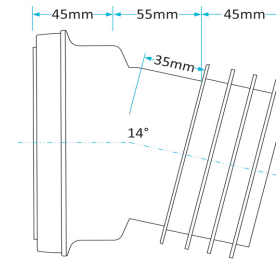


**Product Code** PP0001/A  
**Description** 14° Angle

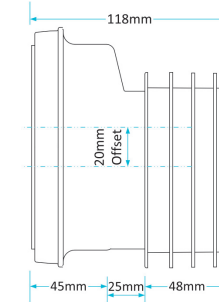


**Product Code** PP0003  
**Description** 20mm Offset

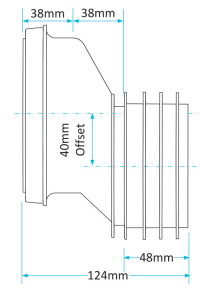


**Product Code** PP0003/A  
**Description** 40mm Offset

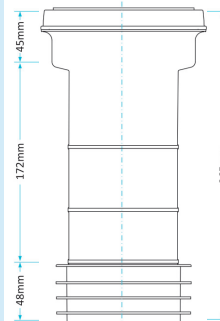


**Product Code** PP0001/B  
**Description** Extended Straight

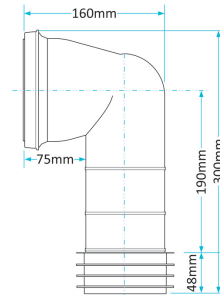


**Product Code** PP0005  
**Description** 90° Bend

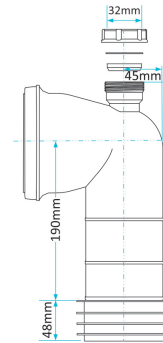


**Product Code** PP0005/A  
**Description** 90° Bend With 32mm Adapter

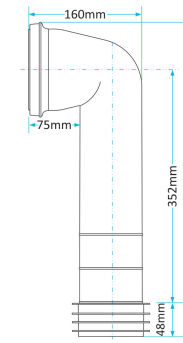

**Product Code** PP0005/B  
**Description** 90° Bend Long

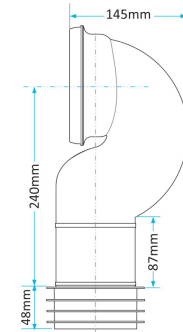

**Product Code** PP0006  
**Description** Swan Neck

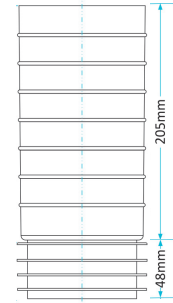


**Product Code** PP0007  
**Description** Extension

## SLINKY-FIT


### Flexible WC Pan Connectors

All with 90 - 114mm Inlet  
(Excluding Back To Wall with 110mm Inlet)  
All with 90 - 110mm Outlet


1. Prior to installation check WC connector .
2. Ensure your WC and outlet pipe are ready for installation.
3. For ease of fitting we would recommend using a water based lubricant on both the inlet and outlet rubber seals.
4. Do not over extend or pull the flexible section off the outlet or inlet connectors. We would recommend extending the connector using the flexible section and not from the outlet or inlet connectors.
5. For extended runs we advise the length should be supported firmly to prevent sagging.
6. On completion of installation test in accordance with current British Standard guidelines.
7. Keep sharp or abrasive materials away from flexible section, and DO NOT use drain rods to clear blockages.

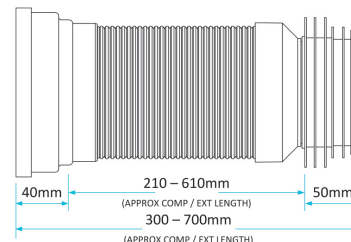


**Product Code** PP0002  
**Description** Long Flexible (300 - 700mm)

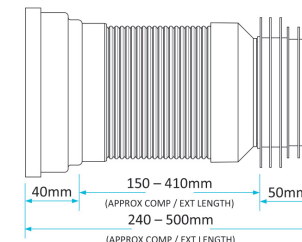


**Product Code** PP0002/A  
**Description** Medium Flexible (240 - 500mm)

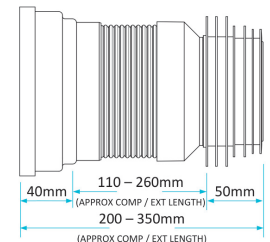


**Product Code** PP0002/C  
**Description** Mini Flexible (200 - 350mm)

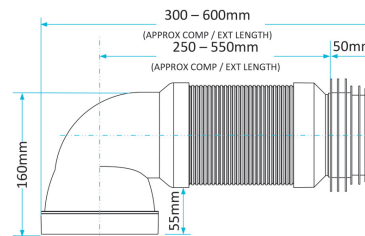

**Product Code** PP0002/B  
**Description** 90° Bend Flexible (300 - 600mm)

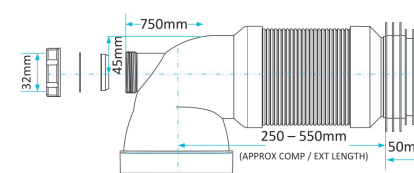

**Product Code** PP0002/D  
**Description** 90° Bend Flexible (300 - 600mm) With 32mm Adapter

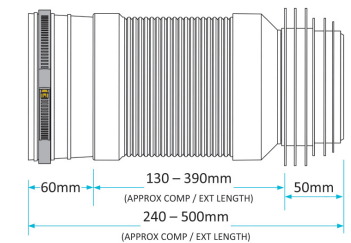

**Product Code** PP0002/E  
**Description** Back To Wall Flexible