




## **Voyage Wall Mounted Tall Storage Unit**

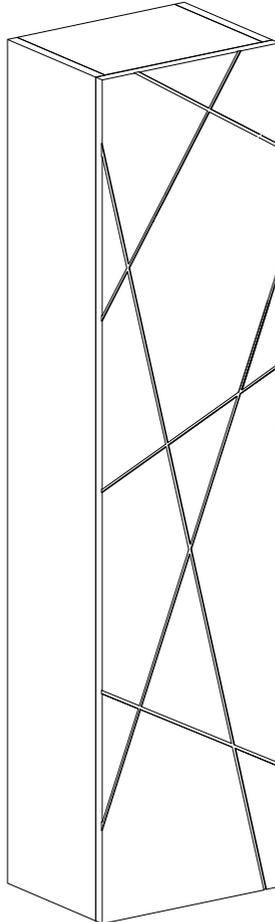


## **Fitting Instructions**

Please follow them carefully and  
leave this manual with end user

## Before you begin:

1. **We recommend that this product is installed by a qualified tradesperson**, Victorian Plumbing Ltd. accept no liability for products incorrectly installed or any damage to the floor, walls, plumbing, vanity cabinet, sink, counter top, or personal injury during installation.
2. **Check the chosen wall space for any pipes/cables prior to drilling**
3. **We recommend that Tall Storage Units must be fastened to a load bearing wall. Check the type of wall you are fixing into and use suitable fixings.**
4. Observe all local plumbing and building codes & regulations.
5. Unpack the product then read these instructions before proceeding. Inspect the product for damage. If any damage is found, contact our Customer Relations team.

## Items Included:

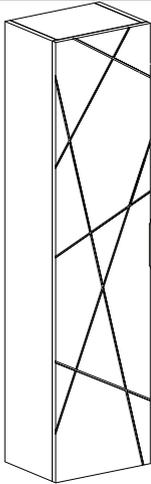
| No. | Description          | Picture   | Qty |
|-----|----------------------|---|-----|
| A   | Cabinet              |    | 1   |
| B   | Rawl Plug            |   | 4   |
| C   | Wall Screw           |  | 4   |
| D   | Wall Hanging Bracket |  | 1   |

## Tools Required (Not Included):

\*Ensure the appropriate PPE is used during installation\*



Pencil



Tape Measure



Drill



Screw Driver



Spirit Level




Silicone Sealant

# Installation

Diagrams are for illustration purposes only. Your Tall Unit may superficially differ from these drawings however the installation guide steps still apply.




## Step 1:

- Place the 'Cabinet' (A) up against your chosen wall, then make a mark across the top of the cabinet to the wall.
- To set the height for the 'Bracket', measure the distance and make another mark below the original marking as shown in the diagram below. Ensure all the markings are level using a spirit level.

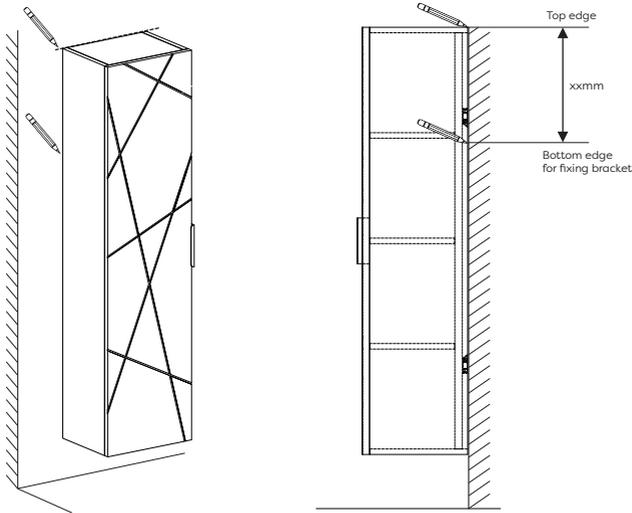


## Step 2:

- Place the 'Bracket' (D) above the bracket line and mark the holes in the wall ready for drilling. Using an appropriate sized drill bit, carefully drill the holes in the wall then insert the Rawl Plugs (B).
- Place the bracket over the drilled holes then using the 'Screws' (C) provided, secure the unit to the wall by screwing into the 'Rawl Plugs'




Warning:  
Check the chosen wall space for  
any pipes/cables prior to drilling!

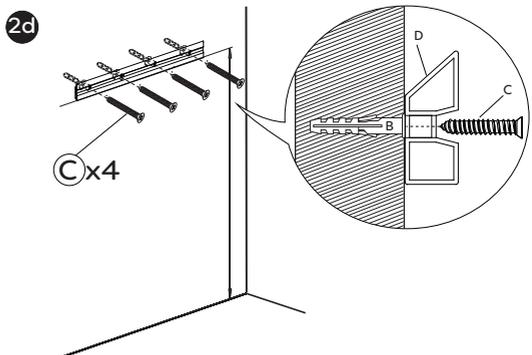


### Step 3:

- Once the bracket is securely fixed to the wall, mount the 'Cabinet' to the 'Bracket' ensuring the cabinet is stable. Ensure the 'Cabinet' is level using a spirit level.

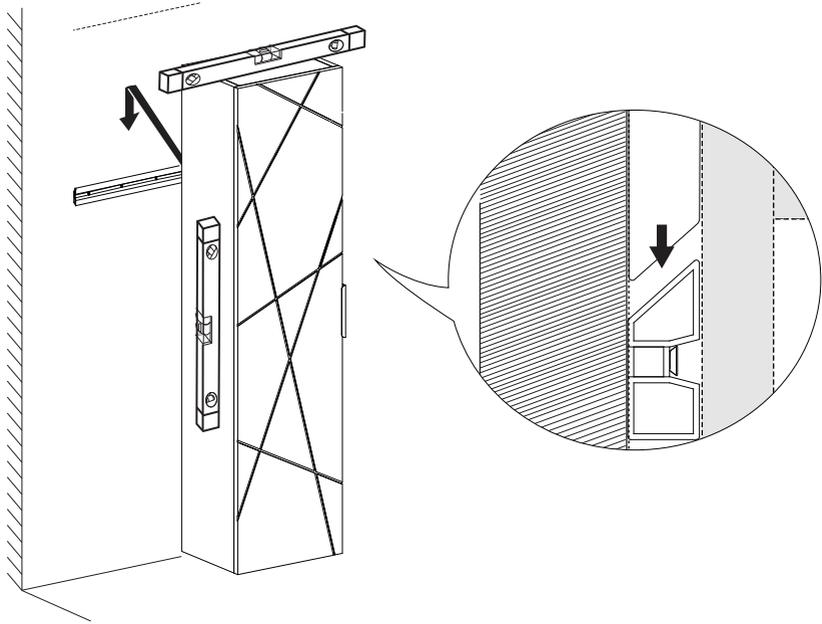


### Door Orientation:

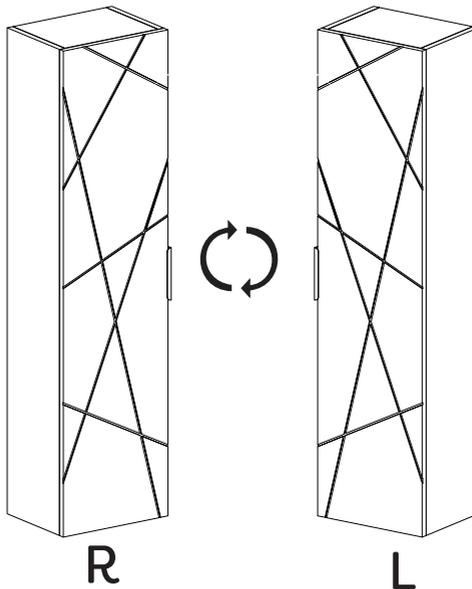

## Door Drilling & Hinge Adjustment






- Some doors are supplied non-drilled for the handles/knobs so that the end user can create the exact look that they want to achieve. Select your desired handle position. Always measure twice before drilling to make sure that the handles will be in the correct position. Check that the hinges and internal components are not in the way of where the handles will be drilled.
- Using an appropriately sized drill bit, drill through the back of the door into a scrap piece of wood to help prevent splitting.

**NOTE:** DRILLED DOORS CANNOT BE RETURNED.

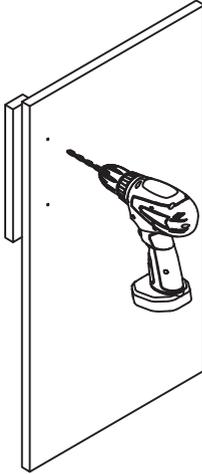

### HINGE ADJUSTMENT

(Adjustment applies when door is mounted)

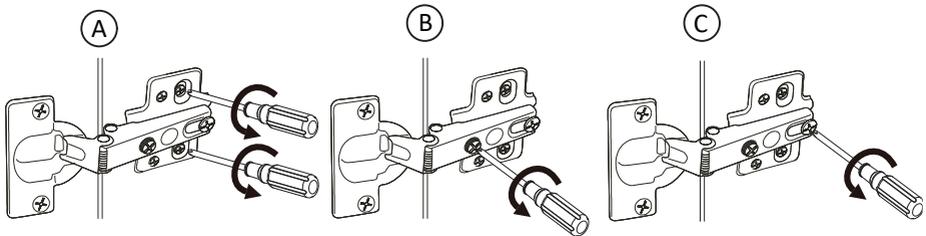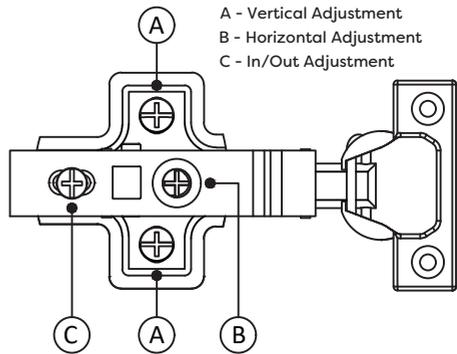

**Door Hinges:**

These should be wiped out with a damp soapy cloth and wiped dry with a soft cloth as necessary. The hinges are lubricated and should not be cleaned with a degreasing agent as this will affect the action of the moving parts. Never lean on partially or fully opened doors in order to gain access to the units. The hinges are specified to adequately support the weight of the door, plus small additional weights such as wire accessories. It is advised that once the bathroom has been installed you should check every six months that all screws on the hinges are tight.

**Please Note:** Unit is water resistant, but not waterproof. All spillages and splashes should be wiped dry, failure to do so may shorten the life expectancy of the product and invalidate any guarantees.

**Recycling and Disposal:**

Please recycle the packaging in accordance with your local government regulations on waste handling and follow the same advice at the end of the products life.

**Notes:**

**Notes:**

[www.victorianplumbing.co.uk](http://www.victorianplumbing.co.uk)