




This product is IP44 - suitable for installation in zones: 2 & Outside Zone

All installations must comply with guidelines which are based on a zonal concept. The diagram above illustrates this concept and must be followed to ensure the safe installation of electrical appliances in the bathroom. These regulations apply to domestic installations only. Installations must be made in accordance with the current IEE wiring regulations and relevant building regulations. **HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician.**

Aries & Leo Magnifying Mirrors (Fig. 2)



Wiring Diagram (Fig. 3)

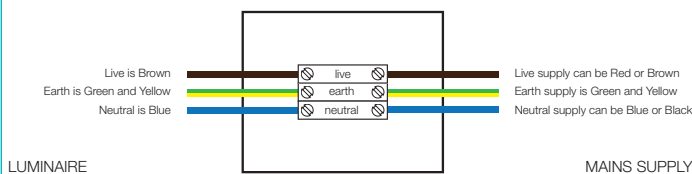

Aries Art No. 22400

Leo Art No. 22300

Thank you for purchasing this HiB product.

Please read through these instructions carefully and refer back to them during installation to ensure that your product is fitted safely and that it retains its high quality finish.

Please retain this leaflet for future reference.

Before installation, ensure the domestic electrical mains supply to which the mirror is to be connected is turned off. Before drilling, ensure that there are no hidden cables or pipes in the wall.

Installation

1. Position the magnifying mirror in a suitable location (according to the zonal diagram opposite, Fig. 1), ensuring that the domestic electrical mains supply is within reach of the electrical entry point of the product. **Do not position in direct sunlight as the magnifying effect of the mirror may pose a fire hazard.**
2. Remove the wall bracket from the base of the mirror via the fixings on the base of the mirror. Using the wall bracket as a guide, carefully mark the required drilling locations using a soft pencil, ensuring it is level. Remove the wall bracket. **Please ensure all marked drill positions accurately match up with the fixing points of the wall bracket before drilling.**
3. Using a suitable drill bit, drill holes in the marked positions to a suitable depth. If drilling through tile, use a ceramic drill bit.
4. Insert wall plugs level with the surface of the wall. If fitting to a tiled surface, wall plugs should be inserted below the tile surface to avoid cracking. *NB. For plasterboard walls, specialist fixings should be purchased, available from any DIY or hardware store.*
5. Fix wall bracket onto wall ensuring that the screw spikes are in a horizontal position.
6. Connect the domestic mains supply to the terminal box according to the wiring diagram below (Fig. 3).
7. Place the mirror onto the wall bracket and secure into place using the fixings on the mirror base – take care not to trap wiring when assembling the mirror onto the wall bracket.
8. Switch on the domestic electrical mains supply to the mirror.

Operating Instructions

Use the arm to position the mirror.

Illumination is operated via the pull chord on the bottom of the mirror base.

Care Instructions

Do not use abrasives or solvents when cleaning this product.

Wipe off all water spillages as soon as possible using a soft, damp cloth.

Aftercare Service

In the unlikely event that this product should fail please contact HiB customer services, details shown below.

LEDs cannot be replaced.



WEEE compliance

Must not be mixed with general household waste