




# ANDES - 1800 - 600

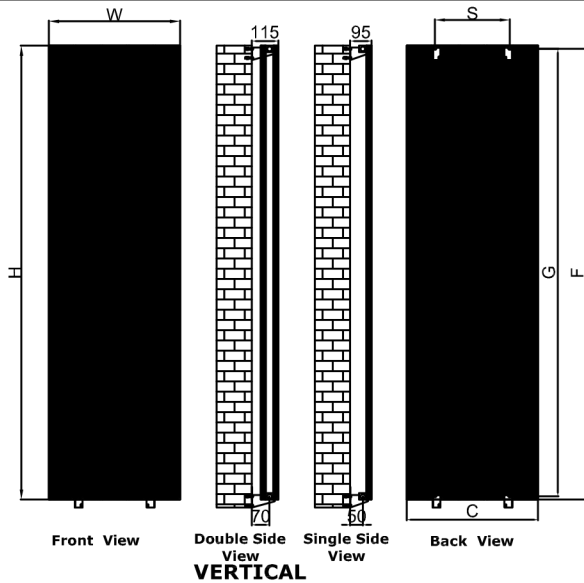


**VERTICAL**




**Top View Vertical**

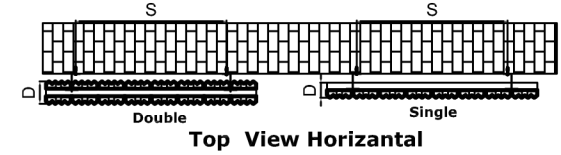

**Top View Horizontal**

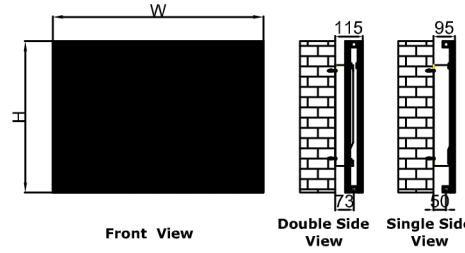

**HORIZONTAL**



**Back View**

- Vertical & Horizontal Mounting
- Optional ALUMINIUM RADIATOR:
- PAINTED
- Max Operational Pressure: 10 Bar
- Inlet/Outlet: 1/2" Female Pipe Thread
- All Dimensions are in mm

**MATERIAL DETAILS**



**SUPPLIED INSTALLATION ACCESSORIES FOR HORIZONTAL**



HANGER LEFT 1 PCS RIGHT 1 PCS  
SCREW 4 PCS  
WALL PLUG 4 PCS



AIR VENT 1 PCS  
BLANKING PLUG 1 PCS

**SUPPLIED INSTALLATION ACCESSORIES FOR VERTICAL**



HANGER LEFT 2 PCS RIGHT 2 PCS  
SCREW 8 PCS  
WALL PLUG 8 PCS



AIR VENT 1 PCS  
BLANKING PLUG 1 PCS

Product Name	Height	Width	Thickness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger to Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
	H	W	D	C	S	F	G	-	-	Watt - BTU/hr (Δ50°)
	mm	mm	mm	mm	mm	mm	mm	L	kg	
<b>ANDES SINGLE 1800 x 310</b>	1800	310	59	310	88	1788	1775	1.23	8.60	987 - 3365
<b>ANDES SINGLE 1800 x 415</b>	1800	415	59	415	193	1788	1775	1.63	11.50	1317 - 4489
<b>ANDES SINGLE 1800 x 520</b>	1800	520	59	520	298	1788	1775	2.04	14.30	1646 - 5610
<b>ANDES DOUBLE 1800 x 310</b>	1800	310	89	310	88	1788	1775	2.27	16.40	1777 - 6057
<b>ANDES DOUBLE 1800 x 415</b>	1800	415	89	415	193	1788	1775	3.03	21.90	2370 - 8080
<b>ANDES DOUBLE 1800 x 520</b>	1800	520	89	520	298	1788	1775	3.78	27.40	2962 - 10098
<b>ANDES SINGLE 600 x 415</b>	600	415	59	415	180	483	348	0.70	3.90	367 - 1250
<b>ANDES SINGLE 600 x 625</b>	600	625	59	625	390	483	348	1.06	5.90	549 - 1872
<b>ANDES SINGLE 600 x 835</b>	600	835	59	835	600	483	348	1.41	7.80	732 - 2496
<b>ANDES SINGLE 600 x 1045</b>	600	1045	59	1045	810	483	348	1.76	9.80	915 - 3120
<b>ANDES SINGLE 600 x 1255</b>	600	1255	59	1255	1020	483	348	2.11	11.70	1098 - 3744
<b>ANDES DOUBLE 600 x 415</b>	600	415	89	415	180	483	348	1.17	6.80	657 - 2237
<b>ANDES DOUBLE 600 x 625</b>	600	625	89	625	390	483	348	1.75	10.20	983 - 3350
<b>ANDES DOUBLE 600 x 835</b>	600	835	89	835	600	483	348	2.34	13.60	1310 - 4467
<b>ANDES DOUBLE 600 x 1045</b>	600	1045	89	1045	810	483	348	2.92	17.00	1638 - 5584
<b>ANDES DOUBLE 600 x 1255</b>	600	1255	89	1255	1020	483	348	3.50	20.40	1966 - 6701

