




# BOVA - 1800 - 600

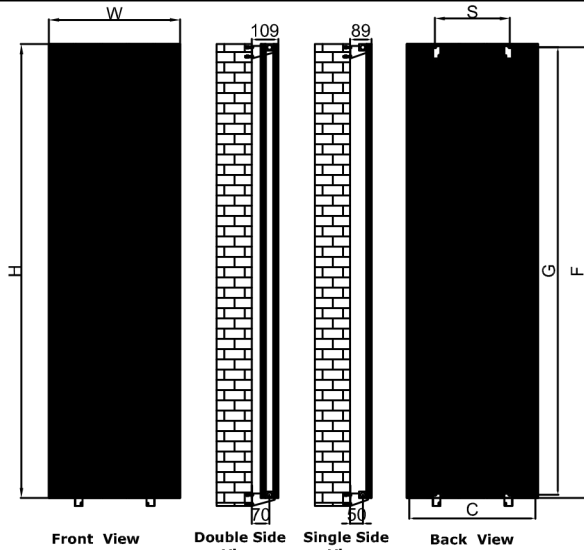


**VERTICAL**




**Top View Vertical**

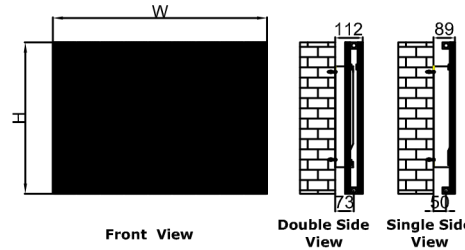

**HORIZONTAL**

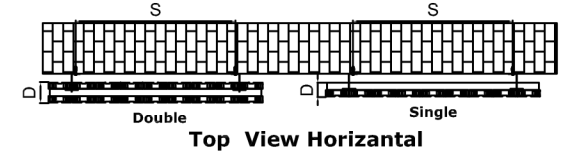

**Top View Horizontal**




**Back View**

- Vertical & Horizontal Mounting
- Optional ALUMINIUM RADIATOR:
- PAINTED
- Max Operational Pressure: 10 Bar
- Inlet/Outlet: 1/2" Female Pipe Thread
- All Dimensions are in mm


**MATERIAL DETAILS**



**SUPPLIED INSTALLATION ACCESSORIES FOR HORIZONTAL**



**SUPPLIED INSTALLATION ACCESSORIES FOR VERTICAL**



Product Name	Height	Width	Thickness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger to Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
	H	W	D	C	S	F	G	-	-	Watt - BTU/hr (Δ50°)
	mm	mm	mm	mm	mm	mm	mm	L	kg	
<b>BOVA SINGLE 1800 x 280</b>	1800	280	54	270	141	1788	1775	1.10	8.50	921 - 3141
<b>BOVA SINGLE 1800 x 375</b>	1800	375	54	365	236	1788	1775	1.50	11.00	1228 - 4188
<b>BOVA SINGLE 1800 x 470</b>	1800	470	54	460	331	1788	1775	1.80	14.00	1535 - 5236
<b>BOVA DOUBLE 1800 x 375</b>	1800	280	79	270	141	1788	1775	2.20	16.00	1658 - 5653
<b>BOVA DOUBLE 1800 x 280</b>	1800	375	79	365	236	1788	1775	2.90	21.30	2211 - 7538
<b>BOVA DOUBLE 1800 x 470</b>	1800	470	79	460	331	1788	1775	3.60	26.60	2764 - 9425
<b>BOVA SINGLE 600 x 470</b>	600	470	54	460	253	483	348	0.70	5.50	512 - 1746
<b>BOVA SINGLE 600 x 660</b>	600	660	54	650	443	483	348	1.00	8.00	716 - 2443
<b>BOVA SINGLE 600 x 850</b>	600	850	54	840	633	483	348	1.30	10.00	921 - 3142
<b>BOVA SINGLE 600 x 1040</b>	600	1040	54	1030	823	483	348	1.50	12.00	1126 - 3840
<b>BOVA SINGLE 600 x 1230</b>	600	1230	54	1220	1013	483	348	1.80	14.50	1330 - 4536
<b>BOVA DOUBLE 600 x 470</b>	600	470	79	460	253	483	348	1.30	10.00	922 - 3143
<b>BOVA DOUBLE 600 x 660</b>	600	660	79	650	443	483	348	1.80	14.00	1289 - 4397
<b>BOVA DOUBLE 600 x 850</b>	600	850	79	840	633	483	348	2.30	17.80	1658 - 5655
<b>BOVA DOUBLE 600 x 1040</b>	600	1040	79	1030	823	483	348	2.80	22.00	2027 - 6912
<b>BOVA DOUBLE 600 x 1230</b>	600	1230	79	1220	1013	483	348	3.60	25.70	2394 - 8164

