


# FRAME MIRRORS

## MIRROR PRODUCT INSTRUCTIONS


- FR60RW, FR60RG, FR60SW, FR60SG  
FR80RW, FR80RG, FR120SW, FR120SG

## INSTALLATION & AFTERCARE INSTRUCTIONS


Please retain for future reference. Instructions should be kept / passed to end-user once installation is complete.

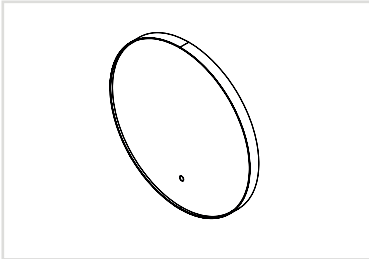


FR60RW & FR60RG

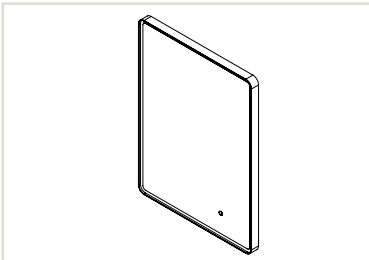

FR60SW & FR60SG

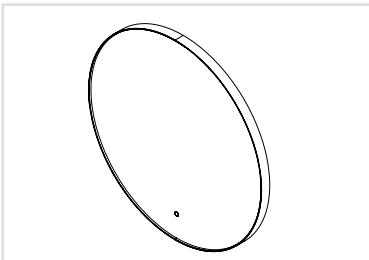

FR80RW & FR80RG

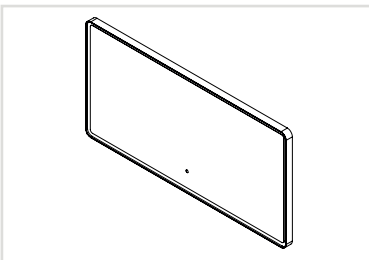

FR120SW & FR120SG

### ELECTRICAL SAFETY INSTRUCTIONS

All fittings must be installed by a competent person, in accordance with current IEE wiring regulations. If in doubt consult a qualified electrician.

### IMPORTANT

Always switch off the electrical supply at the mains during installation and maintenance. It is recommended that the fuse is withdrawn or the circuit breaker is switched off for the necessary circuit before installation commences.

The product must be installed with a minimum distance of 150mm between the infrared sensor and any adjacent wall or obstruction to ensure correct function of the sensor.

Fitting in bathrooms is subject to the appropriate zone in accordance with IEE Regulations. This product is suitable for zone 2 and outside zones. It is NOT suitable for installation in Zone 0 or Zone 1. It is also not suitable for installation in saunas, steam rooms or shower cubicles. This product is only suitable for permanent installation. Do NOT connect to a trailing plug and socket outlet. Although this product has an Ingress Protection rating of IP44 it is only suitable for indoor use. Do not attach the product to surfaces that are damp or otherwise electrically conductive.

### INSTALLATION CARE & SAFETY

Wear suitable eye protection when drilling. Take care when using power tools near water - the use of a residual current device (RCD) is advised. Beware of hidden cables or pipes. Take care if drilling on tiled surfaces in case the drill slips. A piece of masking tape applied to the wall before marking out the fixing holes will stop the drill from wandering.

Do NOT strike glass components with hard or pointed items. Do NOT place very hot or very cold items against or in close proximity to glass surfaces unless an adequately thick insulation material is used to prevent such items coming in contact with the glass.

The nominal thickness of the mirror glass used in this product is 5mm and is film backed for safety. If the glass becomes chipped or broken replace immediately.

This product should be positioned well away from curtains and other fabrics. Never cover the mirror. This product is heated, we recommend that it is turned off after use and should never be left on for prolonged periods of time

This product should only to be installed by a competent person.

### CLEANING

It is recommended that the unit is cleaned with a soft, dry, non abrasive cloth when turned off. Never use cleaning agents or abrasive materials on any type of surface finish. Do not allow moisture to come into contact with the electrical components.

### COMPLIANCE


This product complies with all relevant British and European safety standards.

THIS PRODUCT IS MANUFACTURED TO CLASS I CATEGORY AND MUST HAVE AN EARTH CONNECTION.

COLOUR CODING:	
L - Live	= Brown
N - Neutral	= Blue
⊕ - Earth	= Green & Yellow

Strip wires to a suitable length. DO NOT connect to a plug & socket outlet.

! IF IN DOUBT CONSULT YOUR ELECTRICIAN !


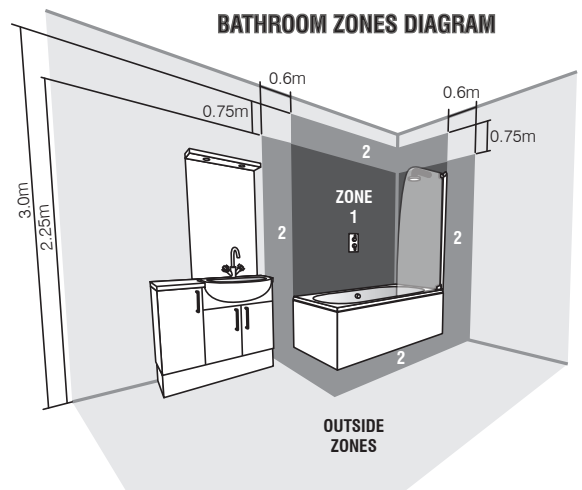


Distances from a bath tub or shower tray

# FRAME MIRRORS

## MIRROR PRODUCT INSTRUCTIONS

- FR60RW, FR60RG, FR60SW, FR60SG  
FR80RW, FR80RG, FR120SW, FR120SG

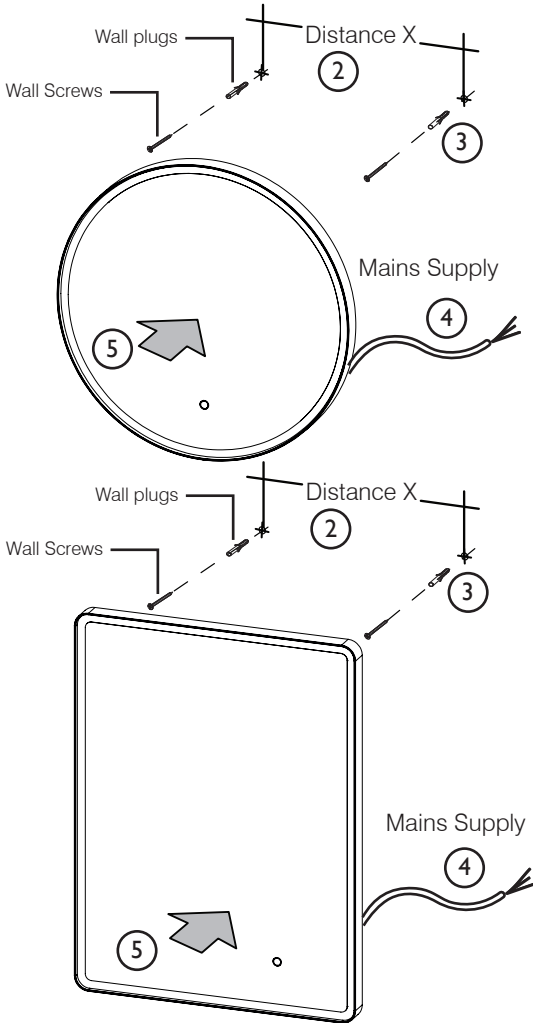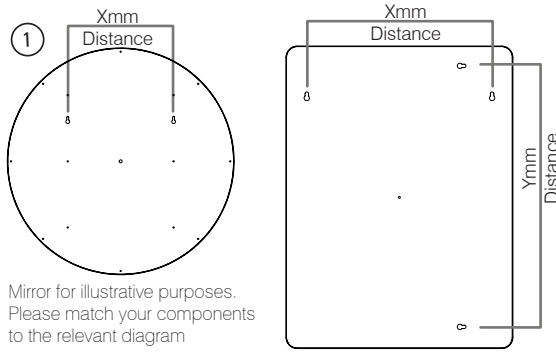

### INSTALLATION PROCEDURE

The wall surface must be of suitable strength and construction.

- 1) Measure the distance (X) between the keyhole slots on the back of the mirror. Only FR60SW&FR60SG has the option to be hung either portrait or landscape, measure distance (Y) to hang in landscape.
  - 2) Mark out the fixing screw positions on the wall using a pencil to the desired height, ensuring they are spaced at distance (X) or (Y).
  - 3) Drill the marked out positions and fit the wall plugs accordingly. Fix the screw into position, leaving a small amount of the screw head proud of the wall for hanging.
- NOTE:** The wall plugs supplied are only suitable for solid stone / brick walls. For plasterboard walls use specialist wall plugs.
- 4) The next step is to make the electrical connection from the mirror to the mains supply. Use the connection wire found at the rear of the mirror to make the necessary connections in accordance with the current IEE regulations. A second person will need to hold the mirror in place whilst electrical connections are made.
  - 5) The mirror should easily slide onto the fixing screws and secure into place.

**NOTE:** To secure the mirror further, a small amount of silicone sealant can be applied to the side of the extrusions to prevent the mirror being accidentally pulled away from the wall.


To remove the mirror, the mirror should first be lifted and then pulled away from the wall.

### OPERATING INSTRUCTIONS

The Frame Mirror comes with LED lighting, which is controlled via an IR sensor located on the front face of the product. The lighting can be controlled using the gestures detailed below:



#### Turn Mirror ON/OFF

To turn the mirror on/off, slowly wave your hand in front of the IR sensor.

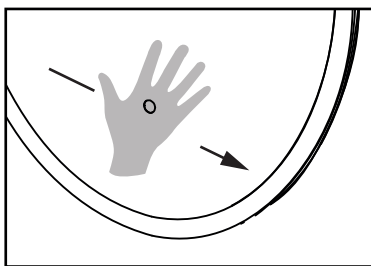

#### Change LED colour

1. When the mirror is OFF
2. Hold your hand in front of the IR sensor to adjust the colour temperature.
3. Remove hand from IR sensor once desired colour temperature is achieved.

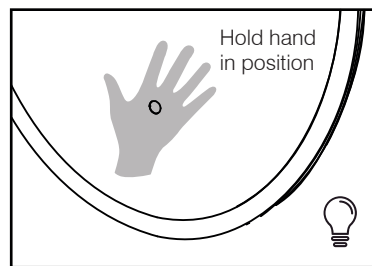

#### Change LED intensity

1. When the mirror is ON
2. Hold your hand in front of the IR sensor to adjust its brightness.
3. Remove hand from IR sensor once desired intensity is reached.

